

Water Quality Assessment of the St. Lucie River Watershed – Water Year 2018 - DRAFT

Gary Goforth, P.E., Ph.D.¹

Quis custodiet ipsos custodes? (*Who watches the Watchers?*)²

Key Findings:

1. Over the last water year (May 2017 – April 2018), the surface water entering the St. Lucie River and Estuary (SLRE) in general was of poor water quality. The best water quality entering the SLRE was from the highly urbanized Tidal Basins. The largest source of phosphorus, nitrogen and sediment pollution to the SLRE was Lake Okeechobee discharges. The C-44 Canal Basin contributed poor water quality, and was the only basin demonstrating a worsening in both nitrogen and phosphorus over the last ten years.
2. It was estimated that stormwater runoff from agricultural land use contributed more flow and nutrient pollution than any other land use, even contributing more flow and nutrient pollution than Lake Okeechobee discharges.
3. The annual Basin Management Action Plan (BMAP) progress reports produced by the Florida Department of Environmental Protection continue to indicate water quality conditions in the tributaries of the SLRE are better than they actually are. Examples of flaws in the BMAP assessment process include the omission of Lake Okeechobee pollution loads, the use of simulated data instead of observed data, the inability to account for hydrologic variability, and the inability to assess individually each of the major basins contributing to the SLRE.
4. An alternative to the assessment approach presented in the BMAP progress reports was developed and used to evaluate water quality conditions of major inflows to the SLRE and to assess progress towards achieving the Total Maximum Daily Load (TMDL) load reduction goals. This alternative approach uses observed data, includes Lake discharges, accounts for hydrologic variability, and is applied to each of the major basins contributing pollution loads to the SLRE. For WY2018, observed 10-yr average nitrogen loads to the SLRE exceeded the Phase 1 BMAP target loads (adjusted for hydrologic variability) by 37 percent. Observed 10-yr average phosphorus loads exceeded the Phase 1 BMAP target loads (adjusted for hydrologic variability) by 19 percent.
5. Recommendations for improving the BMAP progress reports are offered.

¹ Gary Goforth, LLC Stuart, Florida 34997

² Satires of Juvenal, late 1st and early 2nd centuries A.D.

EXECUTIVE SUMMARY

The St. Lucie River and Estuary (SLRE), located along Florida’s southeast coast, is one of the most biologically-diverse estuaries in the nation, and is home to more than three dozen threatened and endangered species (SFWMD et al. 2009). Unfortunately, the SLRE is also one of the most ecologically-stressed river and estuarine systems in Florida. For more than 90 years, the regions’ environmental and economic health has been sacrificed by state and federal agencies through diversion of polluted water from Lake Okeechobee in order to provide flood protection and irrigation benefits to farms and communities south of Lake Okeechobee. This “tragedy of the commons” has played out in national and international media during 2016, as more than 200 billion gallons of polluted Lake Okeechobee overflow containing tons of nutrients, sediment, toxic blue-green algae, poorly oxygenated and low salinity water was diverted from its historical southerly flow pattern easterly to a major tributary to the Indian River Lagoon³. Unfortunately, this tragedy was repeated during the fall of 2017, and again in the summer of 2018.

The spatial extent of the SLRE watershed has more than doubled in the last century as major agricultural canals were constructed (SFWMD 2002). These canals now contribute significant loadings of nutrient and unknown quantities of pesticides (FDEP 2008, FDEP 2013). The dominant land uses in the watershed are agriculture (55%), natural areas (26%), urban areas and other (19%) (FDEP 2013, FDEP 2015, SFWMD 2016). To protect the designated uses of the SLRE, the Florida Department of Environmental Protection (FDEP) established TMDLs for total phosphorus (TP), total nitrogen (TN) and biological oxygen demand (BOD), with concentration endpoints of 81 parts per billion (ppb) for TP, 720 ppb for TN and 2,000 ppb for BOD (FDEP 2008). A BMAP was developed in 2013 which established target load reductions for TP and TN. Unfortunately, the BMAP did not include load reduction targets or projects for Lake Okeechobee discharges, and the FDEP intentionally ignores pollution loading from the lake in their annual progress report for the BMAP (FDEP 2016). Further, the BMAP did not use readily available monitoring data when establishing “Starting Loads,” but instead relied on simulated flows and loads. The FDEP Starting Loads underestimated loads from basins contributing to the SLRE by up to 36 percent compared to individual basin monitoring data, creating not only flawed reference conditions but incorrect load reduction targets and subsequently flawed assessments of annual progress towards achieving the TMDL. As an example of this flawed assessment, despite an admitted lack of field verification and monitoring data, all discharges from agricultural land use are assumed to achieve 100 percent of their load reduction goals once a Notice of Intent has been signed – clearly an optimistic assumption (FDEP 2016). When presented with this information in 2015, FDEP’s response was that they plan to start using actual data in 2017 (FDEP 2015). However, the 2017 report did not, and again used prior flawed methods.

³ A similar environmental catastrophe has occurred in the Caloosahatchee Estuary on Florida’s west coast, which has received even greater volumes of polluted Lake Okeechobee overflow.

Water Quality Assessment of the St. Lucie River Watershed – Water Year 2018 - DRAFT

In lieu of relying on FDEP’s annual progress report, levels of TP, TN and total suspended sediment (TSS) from Lake Okeechobee and from the SLRE watershed were summarized for the most recent water year (May 1, 2017 to April 30, 2018, “WY2018”), and are presented in **Table ES-1**.

As an alternative to the FDEP BMAP targets, hydrologically-adjusted performance measures were developed to assess progress towards achieving the TMDL for the SLRE. These performance measures were developed in a manner similar to those utilized in the predominantly agricultural areas south of the Lake (SFWMD 2016). These performance measures utilized the same concentration endpoints for TP and TN as the BMAP and were used to assess performance of the source basins contributing to the SLRE. The results are summarized in **Figures ES-1 and ES-2 and indicate that nitrogen and phosphorus loads increased above the Starting Period levels**. By contrast, FDEP reported that both nitrogen and phosphorus loads decreased from the Starting Period (FDEP 2018). For the Tidal Basins, reliable flow measurements are not available, and the flow estimate is based on uncalibrated computer modeling; to avoid propagating this uncertainty into the assessment approach, the assessment for the Tidal Basins was based on observed concentrations measured at 29 stations.

Table ES-1. Summary of WY2018 Flows and Loads from SLRE Watershed and Lake Okeechobee.

Water Year 2018 (May 1, 2017 - April 30, 2018)	C-23 Canal	C-24 Canal	Entire C-44 Canal Basin	Ten Mile Creek	Tidal Basins	Lake Okeechobee	Total Watershed	C-44 Canal to SLRE
Basin Discharge, acre feet	219,620	216,954	169,483	152,861	137,763	585,612	1,482,292	79,843
Percent of Total SLRE Watershed	15%	15%	11%	10%	9%	40%	100%	
Total Nitrogen load, pounds	1,113,530	979,900	1,177,370	499,901	341,316	2,988,912	7,100,929	560,435
Percent of Total SLRE Watershed	16%	14%	17%	7%	5%	42%	100%	
Total Nitrogen concentration, ppb	1,864	1,661	2,555	1,203	911	1,877	1,762	2,581
Total Phosphorus load, pounds	267,633	248,259	218,531	154,954	42,337	358,056	1,289,770	146,320
Percent of Total SLRE Watershed	21%	19%	17%	12%	3%	28%	100%	
Total Phosphorus concentration, ppb	448	421	474	373	113	225	320	674
Total Suspended Solids load, pounds	1,482,646	3,095,210	7,455,764	2,174,217	1,595,310	145,531,979	161,335,126	6,818,189
Percent of Total SLRE Watershed	1%	2%	5%	1%	1%	90%	100%	
Total Suspended Solids concentration, ppb	2,483	5,246	16,177	5,230	4,258	91,386	40,025	31,403

Note: Tidal Basins flows and loads are estimated – not measured.

Notes:

1. The C-44 Canal Basin includes the smaller S-153 drainage area, which discharges into the C-44 on the west end near Lake Okeechobee. The FDEP and SFWMD refer to this combined area as the “C-44/S-153 Basin.”
2. “Entire C-44 Canal Basin” includes approximately 89,640 acre feet that was discharged to Lake Okeechobee.
3. Tidal Basins flows and loads are estimated – not measured.

The largest single source of total nitrogen, total phosphorus and sediment load to the SLRE was Lake Okeechobee discharges. In addition, total phosphorus concentrations in Lake Okeechobee discharges to the SLRE remained more than 5 times the lake’s TMDL in-lake target concentration of 40 parts per billion (ppb). Based on data from the South Florida Water Management District (SFWMD) reported that the 5-yr average annual phosphorus loading to the lake from surrounding watersheds was more than 5 times the Lake’s TMDL of 105 metric tons, yet staff acknowledged the agency does not enforce permits that set numeric limits on phosphorus discharges to the

Water Quality Assessment of the St. Lucie River Watershed – Water Year 2018 - DRAFT

lake⁴ (SFWMD 2016). Unfortunately, despite the continued and well-publicized pollution of the lake, the Florida legislature in 2016 enacted a water bill that pushed back deadlines for achieving the lake’s TMDL by decades (Ch. 2016-1).

Figure ES-1. Progress Towards The St. Lucie River And Estuary TN TMDL For Water Year 2018
 (Note: FDEP estimated the loading as 1,897,520 pounds, 63 percent less than estimated herein; the primary reason for the discrepancy is that FDEP ignores the load from Lake Okeechobee)


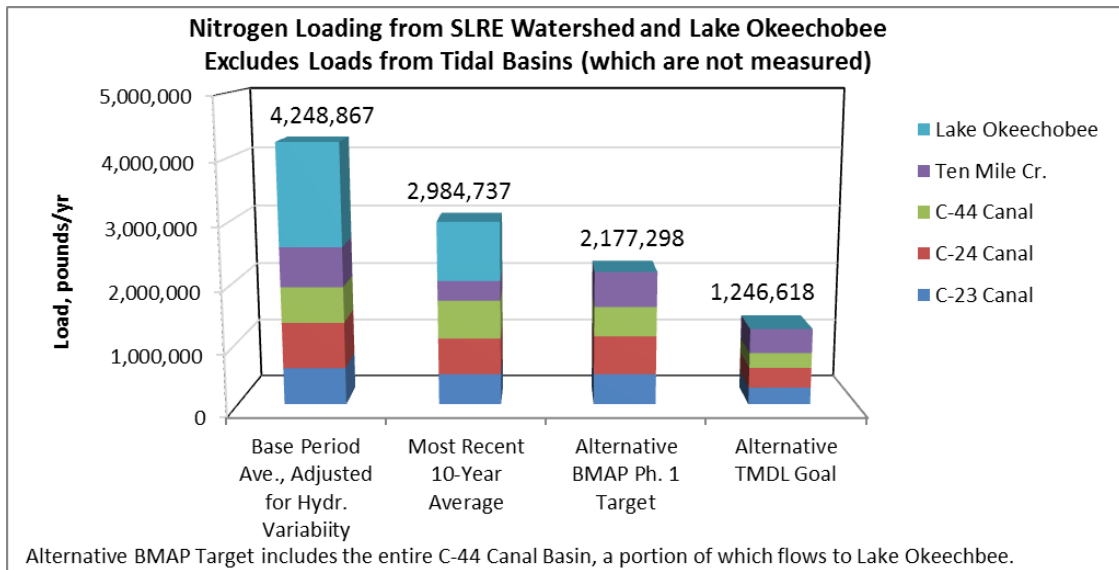


Figure ES-2. Progress Towards The St. Lucie River And Estuary TP TMDL For Water Year 2018
 (Note: FDEP estimated the loading as 457,816 pounds, 20 percent less than estimated herein; the primary reason for the discrepancy is that FDEP ignores the load from Lake Okeechobee)

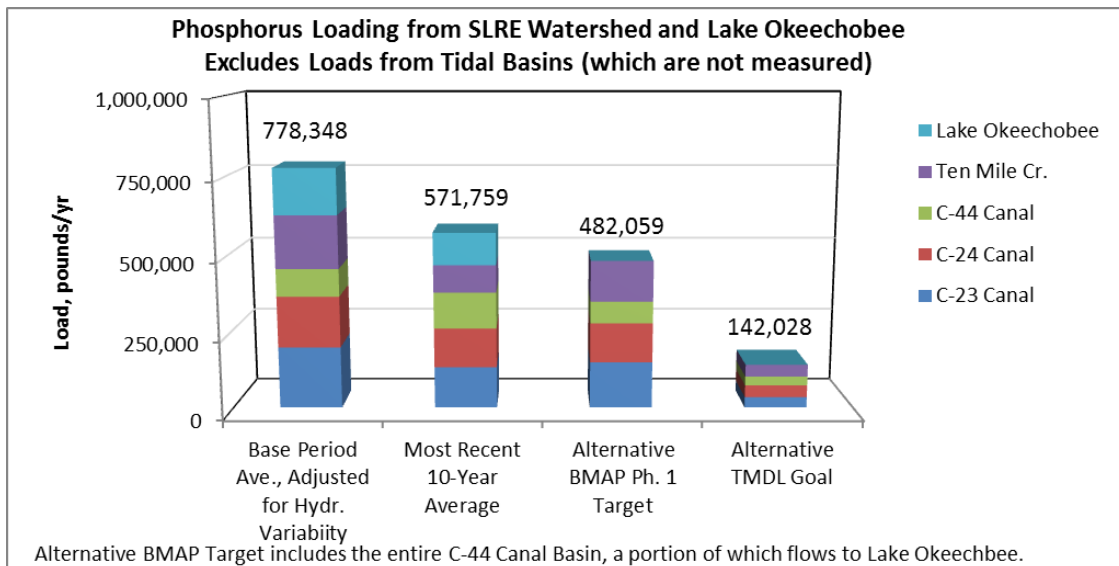

⁴ Works of the District permits (40E-61, F.A.C.)

Water Quality Assessment of the St. Lucie River Watershed – Water Year 2018 - DRAFT

The best water quality entering the SLRE during WY2018 was observed in the highly urbanized Tidal Basins, with concentrations of 113 ppb and 911 ppb for TP and TN, respectively. Each of the remaining source basins, except the C-44 Canal Basin⁵, exhibited a slight improvement in nutrient levels compared to their base periods, however, collectively these WY2018 loads did not achieve the alternative BMAP Phase 1 load target (**Figures ES-1 and ES-2**). The C-23 and Tidal Basins met the alternative BMAP Phase 1 target for TP, while the C-23, C-24 and Tidal Basins met the alternative BMAP Phase 1 target for TN. ***The predominantly agricultural C-44 Canal Basin exhibited poor nutrient conditions, and in fact, continued a trend of deteriorating nutrient conditions compared to its 1996-2005 base period.*** As a whole, the water quality entering the SLRE remains poor, with a slight deterioration compared to the 1996-2005 period (**Table ES-2**).

The assessment described herein highlights areas of potential improvement in the state’s BMAP annual assessment and reporting program, and suggests that implementation of regional nutrient control programs has had variable degrees of success.

Table ES-2. Summary of Water Quality Conditions Entering the St Lucie River and Estuary

Source Basin	Total Nitrogen		Total Phosphorus	
	WY2018 Status	10-yr Trend	WY2018 Status	10-yr Trend
C-23 Canal	Poor	Improving	Poor	Improving
C-24 Canal	Poor	Improving	Poor	Improving
<i>C-44 Canal</i>	<i>Poor</i>	<i>Worsening</i>	<i>Poor</i>	<i>Worsening</i>
Ten Mile Creek	Fair	Improving	Poor	Improving
Tidal Basins	Fair	Improving	Poor	Improving
Lake Okeechobee	Poor	Improving	Poor	Worsening
Total Inflow	Poor	Worsening	Poor	Worsening

Notes:

“Good” indicates the water year achieved the TMDL.

“Fair” indicates the water year exceeded the TMDL by less than 33%.

“Poor” indicates the water year exceeded the TMDL by more than 33%.

The Tidal Basins and Lake Okeechobee assessment were based on observed concentrations; other source basin assessments were based on observed loads compared to hydrologically-adjusted base period loads.

⁵ The C-44 Canal Basin is also known as the “C-44/S-153 Basin.”

1. BACKGROUND

Florida is blessed with abundant surface and groundwater resources, however, decades of excessive water use consumption and weakening environmental policies have resulted in water quantity and water quality issues in virtually every major river system in the state (FDEP 2016). The St. Lucie River and Estuary (SLRE), located along Florida’s southeast coastline, is one of the most biologically-diverse estuaries in the nation, and is home to more than three dozen threatened and endangered species (SFWMD et al. 2009). Unfortunately, the SLRE is also one of the most ecologically-stressed river and estuarine systems in Florida.

At the turn of the 20th century, the city of Stuart was not yet incorporated, the area south of the River was part of Palm Beach County, and the St. Lucie River flowed deep and clear (Lyons 1975). The estuary was renowned for its inshore tarpon fishing, and was known as the “Tarpon Fishing Capital of the World.” The watersheds of the North Fork and South Fork of the River extended a few miles west to a ridge that separated Allapattah Slough, Cane Slough and other areas that flowed north to the St. John’s River or south to the Loxahatchee River (**Figure 1** from SFWMD 2002). In 1913, the State of Florida decided to construct a canal between Lake Okeechobee and the SLRE to divert overflow water from the lake in order to encourage and enhance agricultural and community development south of the Lake (Blake 1980). Prior to that time, there was no natural connection between the Lake and the SLRE. The first discharge of Lake water into the SLRE is reported to have occurred on June 13, 1923 (Osborn 2012). It wasn’t long before fishing guides, residents and local governments began to realize the significant environmental consequences of the destructive Lake releases, and by 1930 Martin County Commissioners forwarded the first of many requests to terminate the discharges (MBOCC 1930). As tons of sediment from the Lake muddied the once-clear river and estuary, the inshore tarpon fishing industry collapsed, and the area re-cast itself as the “Sailfish Capital of the World.” Discharges from Lake Okeechobee were initially unregulated, however, a series of operating schedules were eventually put into place by the U.S. Army Corps of Engineers, leading up to today’s Lake Okeechobee Regulation Schedule 2008 (aka “LORS2008”) (USACE 2016).

For more than 90 years, the regions’ environmental and economic health has been sacrificed by state and federal agencies through diversion of polluted water from Lake Okeechobee in order to provide flood protection and irrigation benefits to farms and communities south of Lake Okeechobee. This “tragedy of the commons” has played out in national and international media during 2016, as more than 200 billion gallons of polluted Lake Okeechobee overflow containing tons of nutrients, sediment, toxic blue-green algae and low salinity water was diverted from its


Water Quality Assessment of the St. Lucie River Watershed – Water Year 2018 - DRAFT

historical southerly flow pattern easterly to a major tributary to the Indian River Lagoon⁶. In late 2017, more than 190 billion gallons of polluted Lake Okeechobee was discharged to the estuary.

During the 1920s through 1960s, the area of the SLRE watershed more than doubled as large agricultural drainage canals were constructed by regional drainage districts and the U.S. Army Corps of Engineers. These canals allowed the waters of Allapattah Slough and Cane Sloughs to be quickly re-directed to the SLRE, increasing the volume and rapidity of stormwater runoff into the river and estuary.

Today, nutrient and sediment loads to the SLRE come from Lake Okeechobee, the C-23 Canal Basin, the C-24 Canal Basin, the C-44 Canal Basin, the Ten Mile Creek Basin and direct runoff from tidally-influenced portions of the North Fork, South Fork and smaller basins – collectively referred to as the “Tidal Basins” (Figure 2). In addition, stormwater runoff from the adjacent C-25 Canal Basin periodically is discharged through the C-24 Canal into the North Fork of the SLRE.

Figure 1. Historical drainage of the St. Lucie River Watershed (SFWMD 2002).

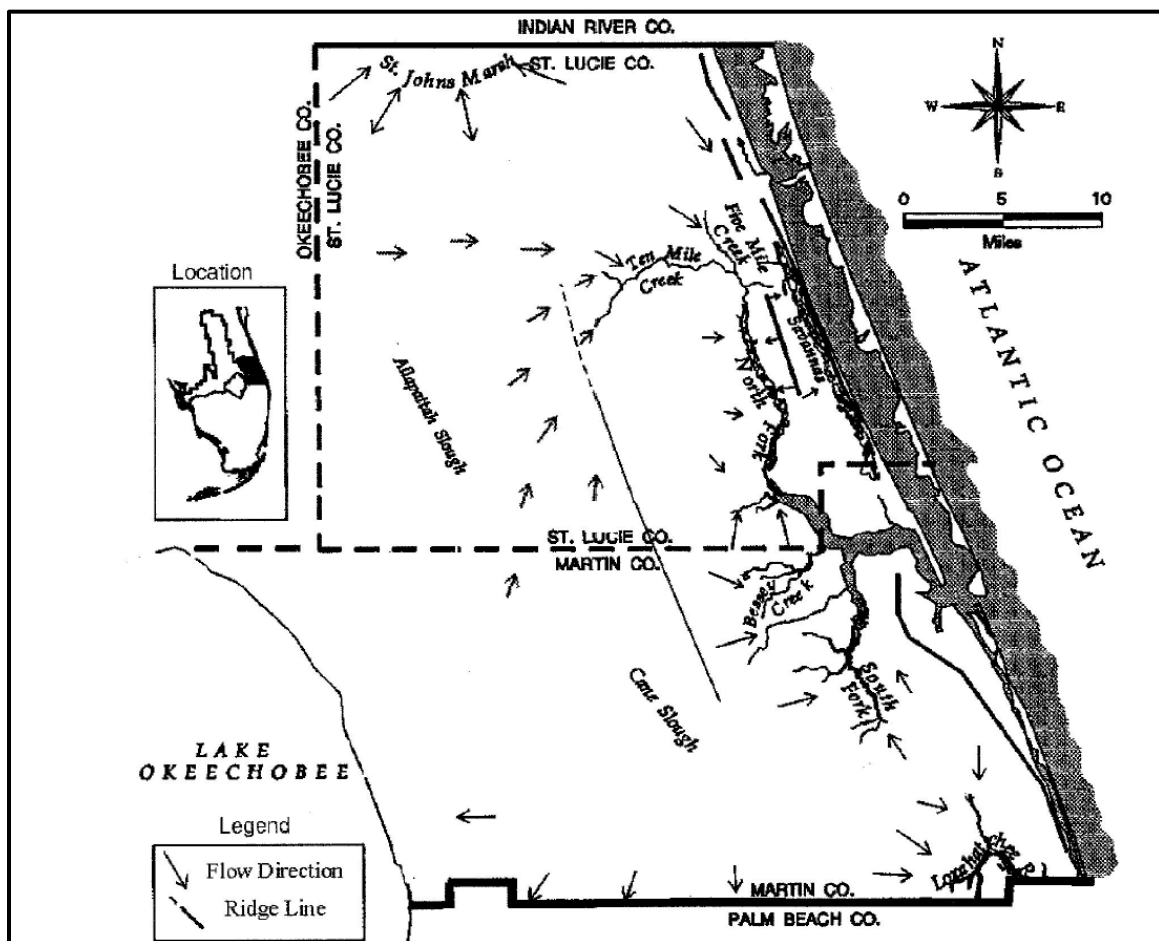

⁶ A similar environmental catastrophe has occurred in the Caloosahatchee Estuary on Florida’s west coast, which has received even greater volumes of polluted Lake Okeechobee overflow.

Water Quality Assessment of the St. Lucie River Watershed – Water Year 2018 - DRAFT

Land use. The dominant land use in the SLRE watershed is agriculture, comprising 55 percent of the contributing area (**Table 1**). Approximately 26 percent of the watershed is natural (uplands, wetlands, water, and barren land); while less than 20 percent is urban and built-up area. The total area for the SLRE excludes the South Coastal basin (approximately 12,000 acres) which does not drain to the St. Lucie River or Estuary, but to the St. Lucie Inlet area.

Table 1. Characteristics of Basins Contributing to the SLRE (from FDEP 2014, SFWMD 2016)


Basin	Area (acres)	Ag Area (acres)	Ag Area (%)	Natural Area (acres)	Natural Area (%)	Urban & Other (acres)	Urban & Other (%)
C-23 Canal Basin	112,160	84,744	76%	23,706	21%	3,710	3%
C-24 Canal Basin	83,373	67,516	81%	15,701	19%	156	0%
C-44 Canal Basin	132,717	78,351	59%	37,163	28%	17,203	13%
Ten Mile Creek	39,726	32,491	82%	0	0%	7,235	18%
Tidal Basins, composed of the following:	157,840	26,533	17%	59,945	38%	71,362	45%
<i>North Fork, excl. Ten Mile Cr.</i>	92,138	3,968	4%	33,129	36%	55,041	60%
<i>South Fork</i>	50,121	20,120	40%	18,987	38%	11,014	22%
<i>Basin 4-5-6</i>	15,581	2,445	16%	7,830	50%	5,306	34%
Total SLRE Watershed	525,816	289,635	55%	136,516	26%	99,665	19%

2. DATA ANALYSIS

Monitoring data for flow and water quality from the Lake and the agricultural drainage canal basins are available from the SFWMD public database (DBHYDRO). The periods of record for flow, water quality and rainfall vary among the contributing basins; for example flow records extend from April 1931 for discharges from Lake Okeechobee but begin in September 1999 for the Ten Mile Creek Basin. In general, water quality data for the Lake discharges are available after 1973 and for the other basins after 1979. For the Tidal Basins, reliable flow data are not available, however water quality is monitored at 29 stations; see **Figure 2** for monitoring locations.

Daily flow data were downloaded from DBHYDRO for representative stations for each of the source basins; missing data were filled in using appropriate algorithms. Available water quality data for TP, TN and TSS were also downloaded from DBHYDRO. Calculations of load followed the methods used by the SFWMD as described in the 2016 South Florida Environmental Report (SFWMD 2016). Daily rainfall data were downloaded from DBHYDRO, and precipitation estimates for each basin were obtained using representative stations and weighting factors as described in the *Draft Technical Support Document: St. Lucie River Watershed Performance Metric Methodologies* (SFWMD et al. 2013). Annual summaries of historical flows and loads for each of the source basins and Lake Okeechobee are presented in **Appendix 1**.

Figure 2. St. Lucie River Watershed, showing locations of sampling sites (from SFWMD 2016)

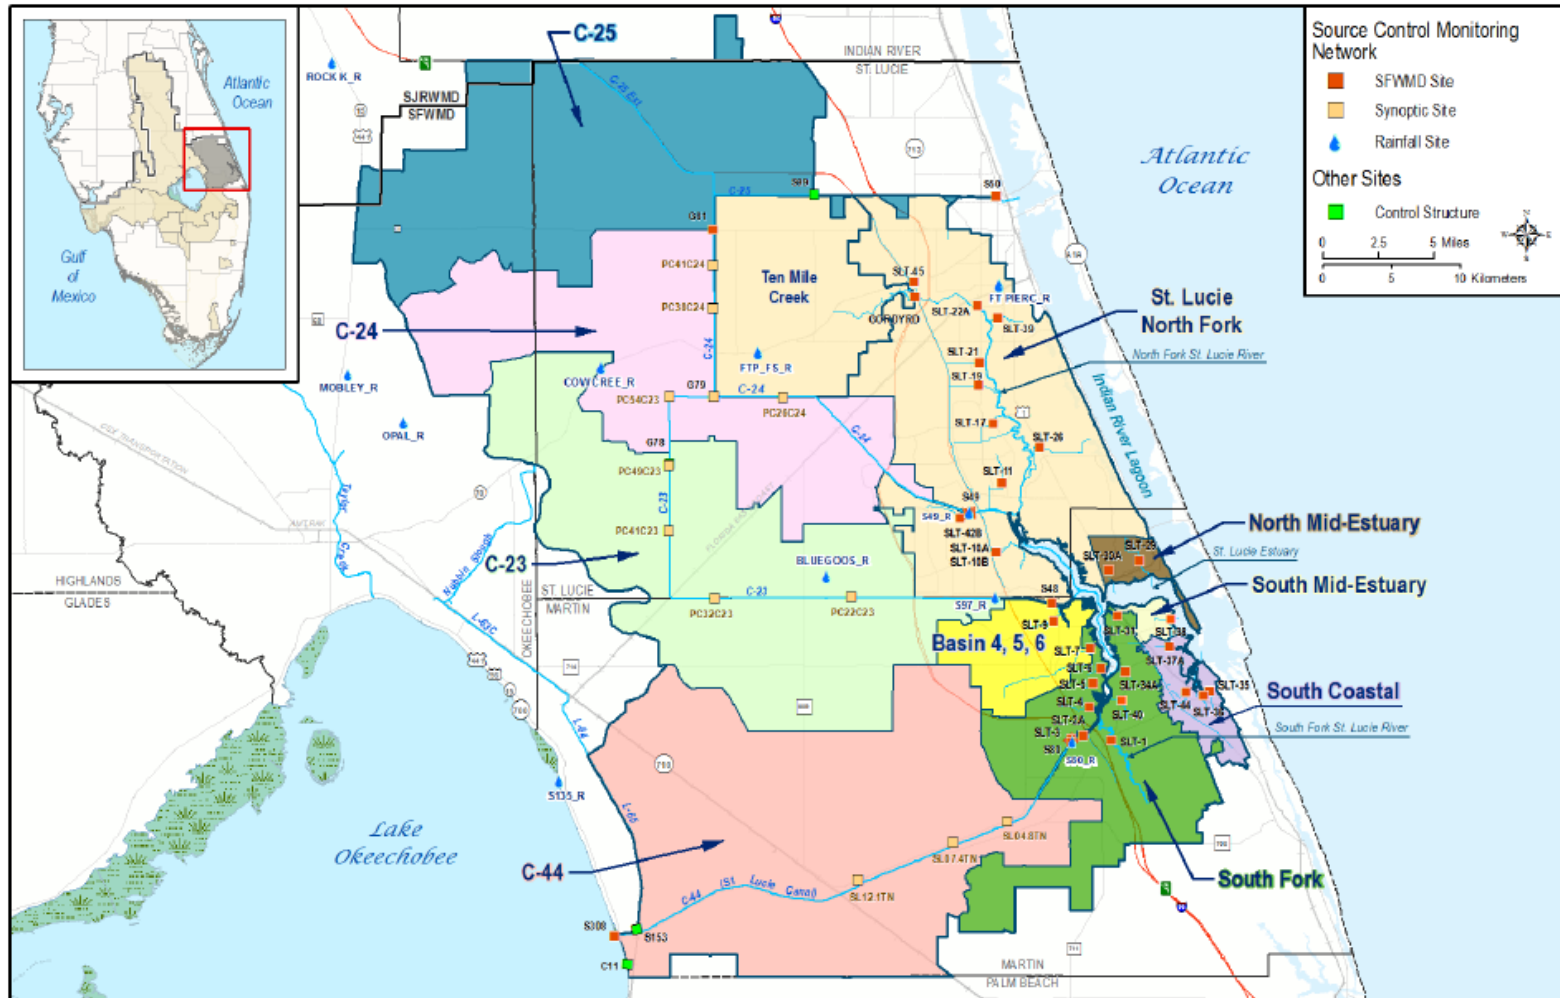

Notes: 1. The runoff from the C-25 Basin generally flows east to the Indian River Lagoon, but at times may be directed south into the C-24 Basin. 2. The Tidal Basins include areas downstream of water control structures and includes the South Fork, Basin 4-5-6, North and South Mid-Estuary, and the North Fork Basin, excluding the Ten Mile Creek Basin. 3. The South Coastal Basin does not contribute to the St. Lucie River and Estuary, but rather, to the St. Lucie Inlet area.

C-44 Canal Basin. Runoff from the C-44 Canal Basin can flow either to the SLRE through the S-80 structure or to Lake Okeechobee through the S-308 structure, depending on decisions by the U.S. Army Corps of Engineers (USACE) and the South Florida Water Management District (SFWMD). Over the long-term (1980-2016), approximately two-thirds of the C-44 Canal Basin runoff flowed to the SLRE and one-third flowed to the lake. However the annual proportion varied significantly: from one percent to the SLRE in 2008 (with the balance to the Lake) to 100 percent in 2004. Unfortunately, the FDEP TMDL and BMAP did not account for this annual variability, and erroneously assumed a constant proportion of *“only 76.5% of the runoff in the C-44/ S-153 sub-basin runoff flows to the St. Lucie Estuary.”* (FDEP 2013). This led to the incorrect decision that *“only 76.5% of the C-44/S-153 sub-basin runoff was applied in the St. Lucie River and Estuary BMAP allocations.”* This unnecessary assumption utilized by FDEP resulted in nutrient TMDL allocations and associated BMAP goals that are too high roughly half the years and too low the other years. To accurately characterize flow and loads from the C-44 Canal Basin, **total** basin flows and loads, that is, combining flow to both the SLRE and to the Lake, were calculated in this present analysis and used to develop basin performance measures.

Lake Okeechobee Pass-through Flows and Loads. The present analysis calculates Lake Okeechobee discharges through the C-44 Canal, referred to as “pass-through flows,” following the algorithm used by the SFWMD (SFWMD 2013). However, the SFWMD algorithm for calculating the remaining C-44 Canal Basin loads generates excessive negative loads and concentrations, which are physically impossible. Hence a modified algorithm was used in this analysis that maintained the daily mass balance at the S-80 and S-308 structures and avoided negative values.

Tidal Basins. The Tidal Basins encompass the area within Basin 4-5-6, South Fork Basin, portions of North Fork (excluding the Ten Mile Creek Basin), and other small basins; this area encompasses approximately 158,000 acres. Water quality data were obtained from 29 monitoring stations for the period November 2001 through the current water year from DBHYDRO. While flow is monitored at some of these locations, the lack of reliable flow data for all stations prevented calculations of nutrient loads, and hence the water quality assessment was based on measured concentrations. To ensure data were representative of basin runoff and not tidal flow, only data collected when positive outflow was observed and when specific conductance values were below 2,500 $\mu\text{mhos/cm}$ were used in the analysis; for further details see SFWMD et al. 2013. A single monthly composite concentration for the Tidal Basins was calculated based on an area weighting of available data during that month. The median monthly composite concentrations were calculated for each water year as representative of the Tidal Basins.

Water Quality Assessment of the St. Lucie River Watershed – Water Year 2018 - DRAFT

Water Quality Conditions for Current Year and for the Most Recent 10-yr period

Summaries of the WY2018 nutrient and sediment levels from the SLRE watershed and from Lake Okeechobee are presented in **Table 2 and Figures 4**. For the year, approximately 90 percent of the C-44 Canal Basin flows and nutrient loads entered the SLRE while the remainder entered the lake. Flow and loads were also distributed based on land use⁷ (**Figure 5**). Despite the large discharges from the Lake during WY2018, **stormwater runoff from agricultural lands represented the single largest source of flow and nutrient loading, accounting for 46 percent of the flow, 49 percent of the nitrogen loads and 63 percent of the phosphorus loading.** By contrast, runoff from urban and natural areas contributed the smallest amount of pollution loading, ranging from 5-6 percent.

Table 2. Summary of WY2018 Surface Inflows from SLRE Watershed and Lake Okeechobee.

Water Year 2018 (May 1, 2017 - April 30, 2018)	C-23 Canal	C-24 Canal	Entire C-44 Canal Basin	Ten Mile Creek	Tidal Basins	Lake Okeechobee	Total Watershed	C-44 Canal to SLRE
Basin Discharge, acre feet	219,620	216,954	169,483	152,861	137,763	585,612	1,482,292	79,843
Percent of Total SLRE Watershed	15%	15%	11%	10%	9%	40%	100%	
Total Nitrogen load, pounds	1,113,530	979,900	1,177,370	499,901	341,316	2,988,912	7,100,929	560,435
Percent of Total SLRE Watershed	16%	14%	17%	7%	5%	42%	100%	
Total Nitrogen concentration, ppb	1,864	1,661	2,555	1,203	911	1,877	1,762	2,581
Total Phosphorus load, pounds	267,633	248,259	218,531	154,954	42,337	358,056	1,289,770	146,320
Percent of Total SLRE Watershed	21%	19%	17%	12%	3%	28%	100%	
Total Phosphorus concentration, ppb	448	421	474	373	113	225	320	674
Total Suspended Solids load, pounds	1,482,646	3,095,210	7,455,764	2,174,217	1,595,310	145,531,979	161,335,126	6,818,189
Percent of Total SLRE Watershed	1%	2%	5%	1%	1%	90%	100%	
Total Suspended Solids concentration, ppb	2,483	5,246	16,177	5,230	4,258	91,386	40,025	31,403

Note: Tidal Basins flows and loads are estimated – not measured.

Average annual flows and loads for each source basin were calculated for the most recent 10-yr period⁸ (**Table 3 and Figure 6**). Of the multiple basins contributing to the SLRE, Lake Okeechobee was the largest single source of flow, nitrogen and suspended sediment from the SLRE Watershed for the most recent 10-yr period. The C-23 Canal Basin was the single largest source of phosphorus load to the SLRE. The Tidal Basins exhibited the lowest concentration of nutrients of all sources to the SLRE. Discharges from Lake Okeechobee accounted for more than three-quarters of the sediment load to the SLRE.

Classified by land use, agricultural runoff was the largest source of flow and nutrient pollution, contributing 52 percent of the flow, 58 percent of the nitrogen load and 71 percent of the phosphorus load (**Figure 7**). By contrast, runoff from urban and natural areas contributed the

⁷ Land use data from FDEP BMAP spreadsheets. Allocation among different land uses assumed similar load reductions across land uses within a basin.

⁸ Monthly surface runoff flows for the Tidal Basin were estimated from SFWMD's SLE Tidal Basin Lin-Res Model calibrated to the SLE WaSh Model results. For periods outside the Lin-Res Model simulation period, a regression model was used based on measured monthly rainfall ($R^2=85\%$). Flows and loads were thus estimated for the Tidal Basins.

Water Quality Assessment of the St. Lucie River Watershed – Water Year 2018 - DRAFT


smallest amount of pollution loading, ranging from 7-9 percent. Lake Okeechobee discharges contributed more than 75 percent of the total suspended sediment load.

Table 3. Summary of recent 10-yr average annual flows and loads from the SLRE Watershed and Lake Okeechobee.

WY2009-2018 Average	C-23 Canal	C-24 Canal	Entire C-44 Canal Basin	Ten Mile Creek	Tidal Basins	Lake Okeechobee	Total Watershed
Flow, acre feet	107,381	139,810	139,864	104,136	137,317	225,919	854,427
Percent of Total SLRE Watershed	13%	16%	16%	12%	16%	26%	100%
Total Nitrogen load, pounds	500,456	588,706	621,715	319,391	316,801	954,471	3,301,538
Percent of Total SLRE Watershed	15%	18%	19%	10%	10%	29%	
Total Nitrogen concentration, ppb	1,714	1,548	1,635	1,128	848	1,554	1,421
Total Phosphorus load, pounds	133,522	128,316	117,225	88,451	36,479	104,246	608,238
Percent of Total SLRE Watershed	22%	21%	19%	15%	6%	17%	
Total Phosphorus concentration, ppb	457	337	308	312	98	170	262
Total Suspended Solids load, pounds	1,231,578	1,623,105	1,258,615	1,703,149	1,741,195	27,146,558	34,704,201
Percent of Total SLRE Watershed	4%	5%	4%	5%	5%	78%	
Total Suspended Solids concentration, ppb	4,218	4,269	3,309	6,014	4,663	44,187	14,936


See footnote on flow estimation for Tidal Basins.

Figure 4. Distribution of WY2018 Flows From the SLRE Watershed by Source Basin.

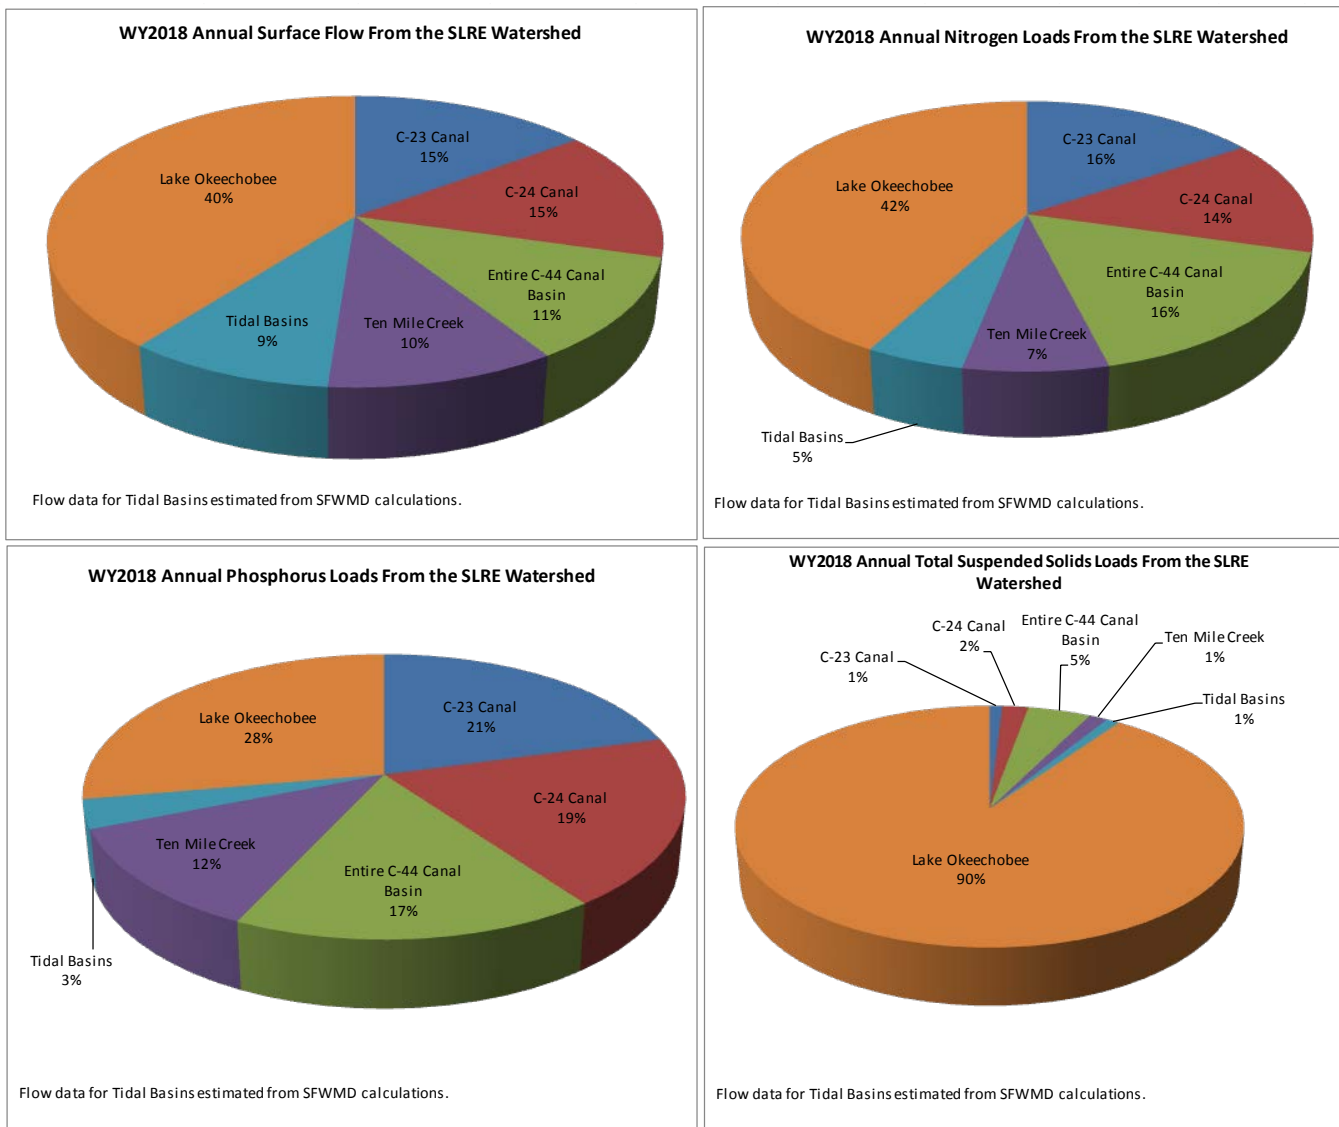

Water Quality Assessment of the St. Lucie River Watershed – Water Year 2018 - DRAFT

Figure 5. Distribution of WY2018 Flows From the SLRE Watershed by Land Use.

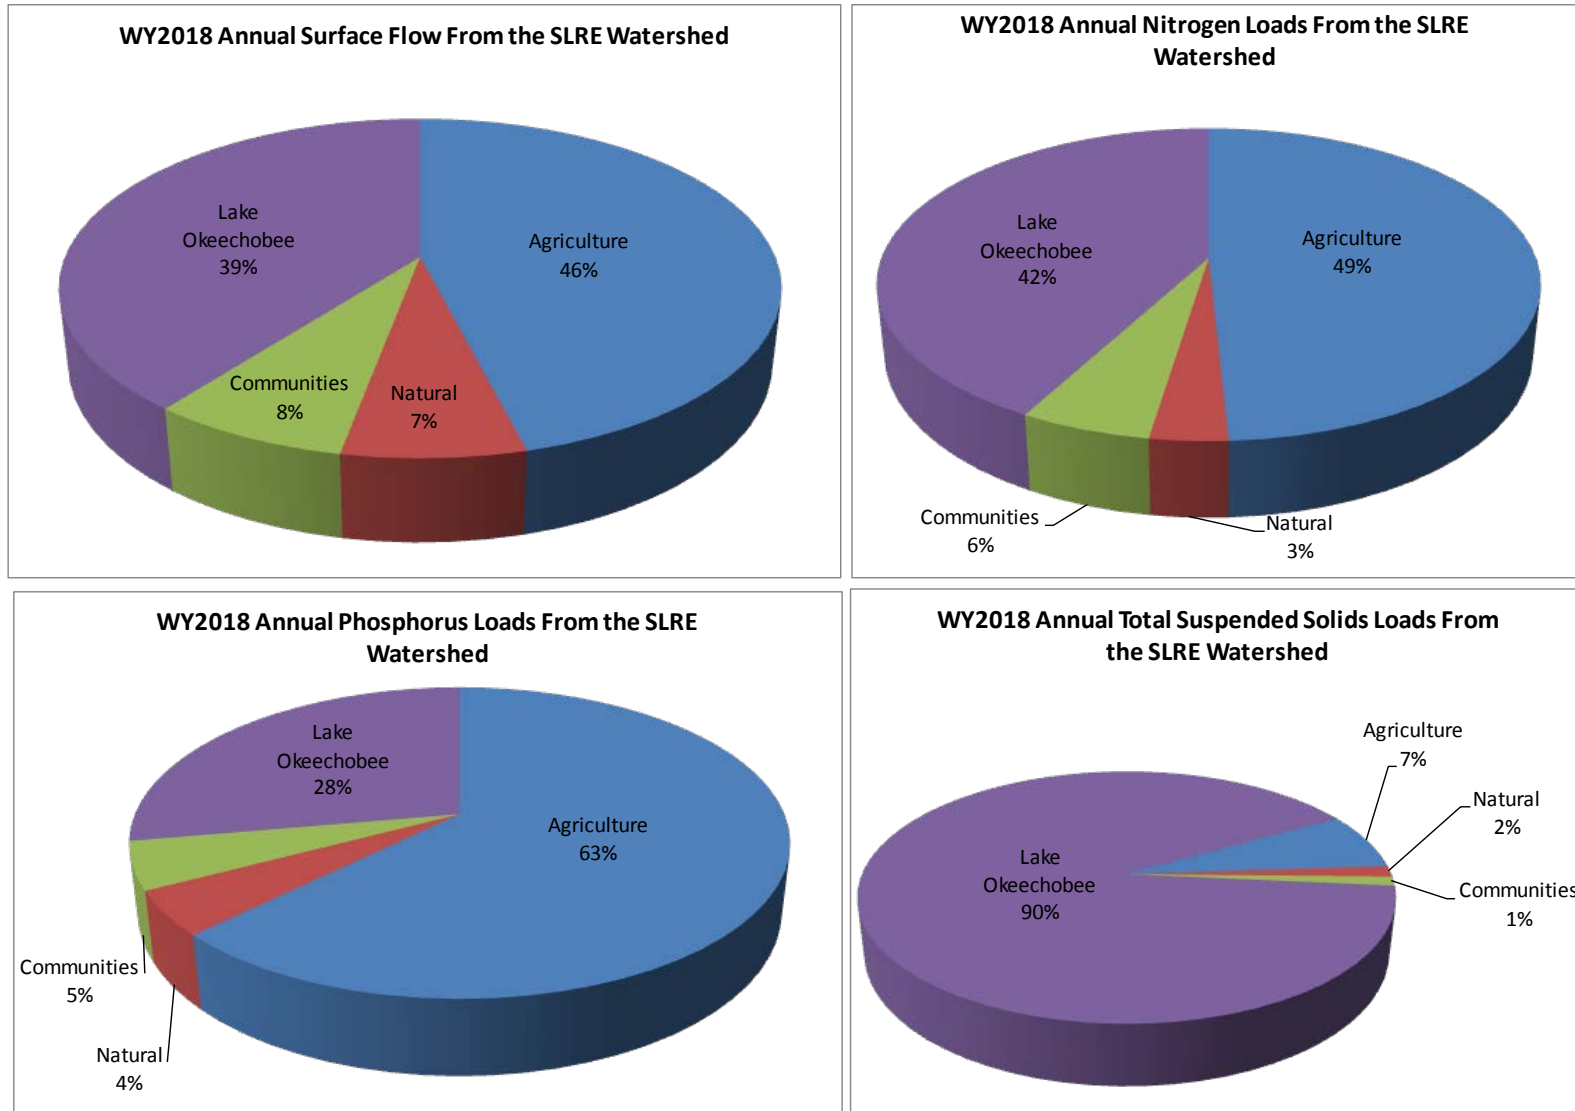

Water Quality Assessment of the St. Lucie River Watershed – Water Year 2018 - DRAFT

Figure 6. Distribution of 10-yr Average Flows From the SLRE Watershed by Source Basin.





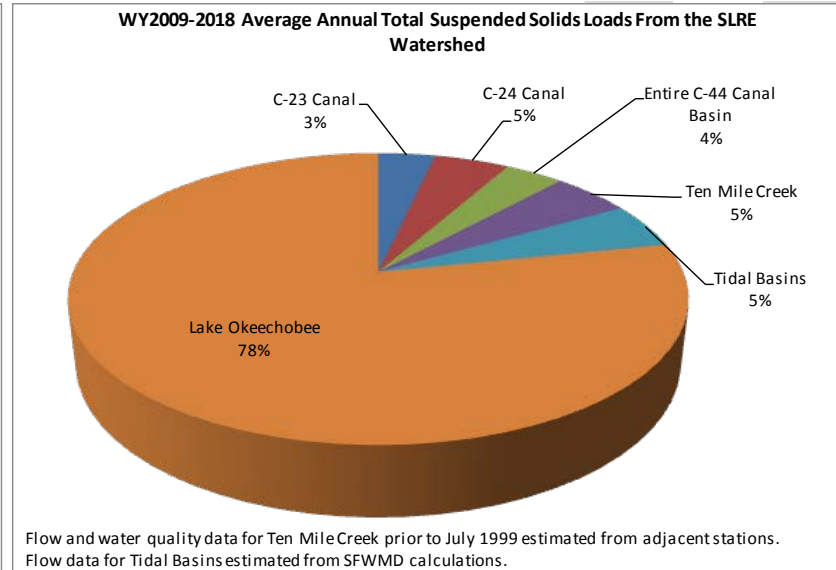


Figure 7. Distribution of 10-yr Average From the SLRE Watershed by Land Use.

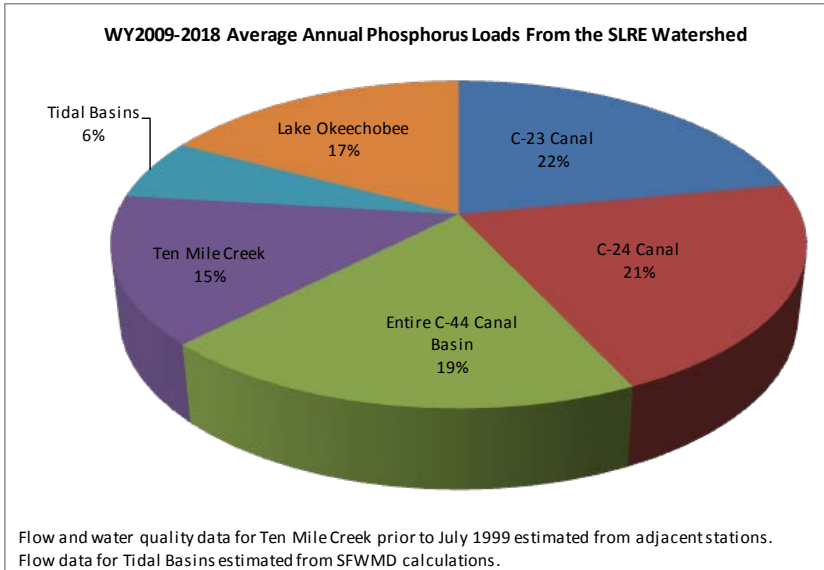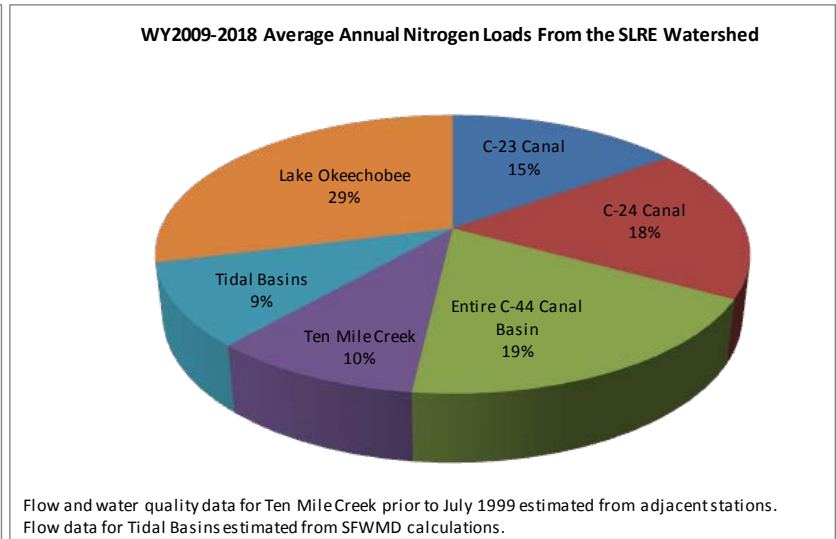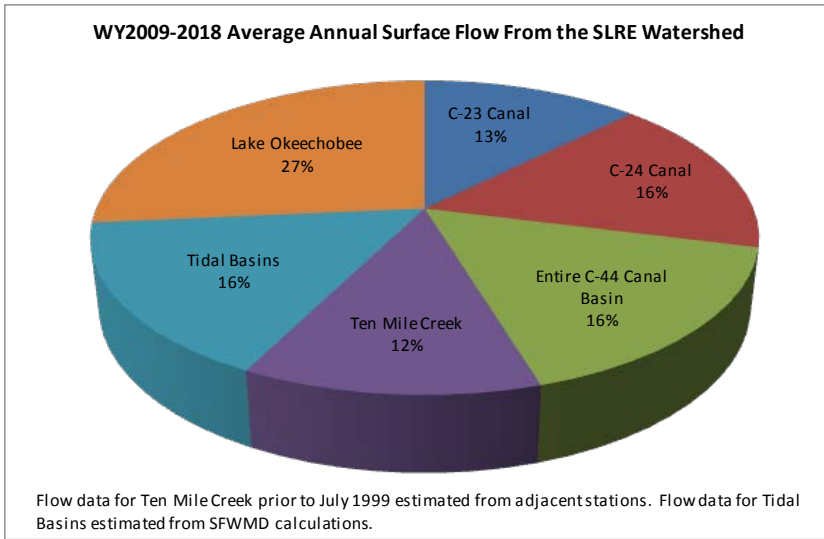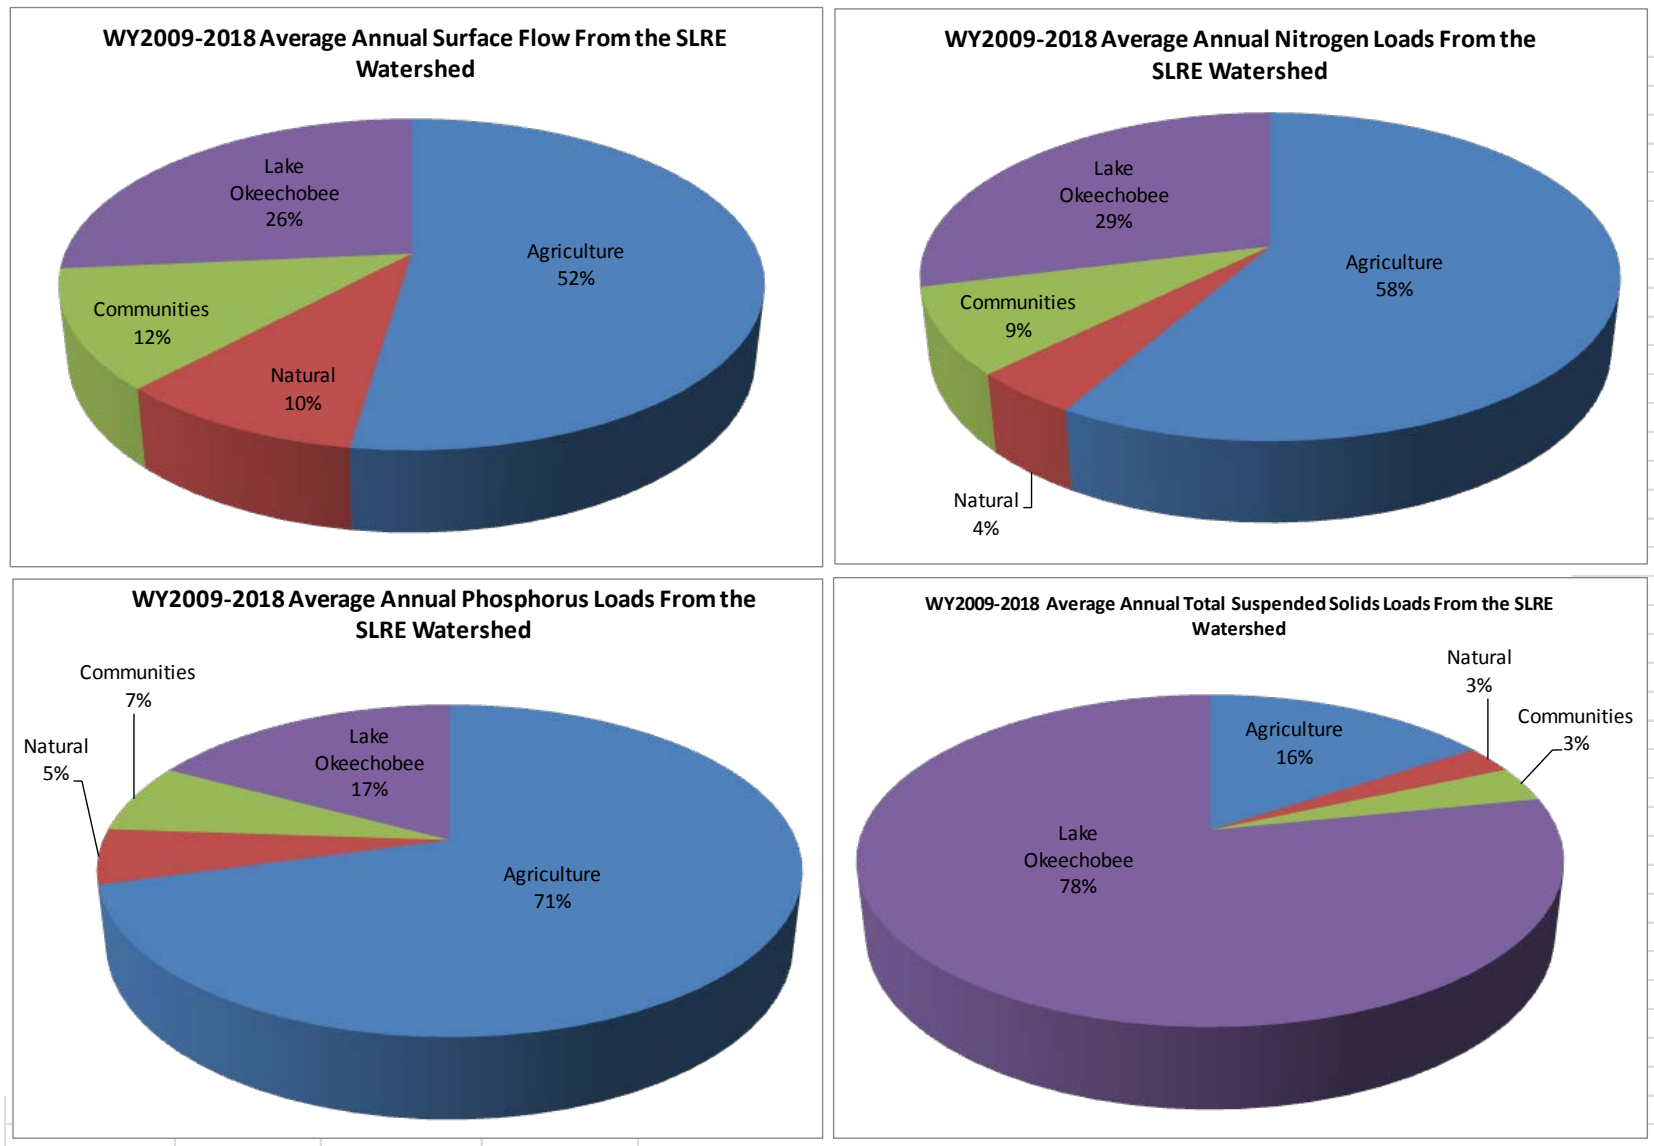

Flows and Loads to the St. Lucie River and Estuary

Flows and loads to the St. Lucie River and Estuary (SLRE) are slightly different than the flows and loads from the SLRE watershed in that a portion of the runoff from the C-44 Canal Basin is discharged to Lake Okeechobee and not into the SLRE. During WY2018, 53 percent of the C-44 Basin runoff was sent to Lake Okeechobee and the rest sent to the SLRE. The most recent annual and 10-yr average flows and loads sent to the estuary are presented in **Tables 4 and 5** and **Appendix 3**. Despite the large discharges from the Lake during WY2018, **stormwater runoff from agricultural lands represented the single largest source of flow and nutrient loading of all the sources to the SLRE, accounting for 51 percent of the flow, 57 percent of the nitrogen loads and 70 percent of the phosphorus loading.** By contrast, runoff from urban and natural areas contributed the smallest amount of pollution loading, ranging from 7-8 percent. Lake Okeechobee discharges contributed an astonishing 145 million pounds of suspended sediment.

Table 4. WY2018 flows and loads to the SLRE.

Water Year 2018 (May 1, 2017 - April 30, 2018)	C-23 Canal	C-24 Canal	C-44 Canal to SLRE	Ten Mile Creek	Tidal Basins	Lake Okeechobee	Total to SLRE
Flow, acre feet	219,620	216,954	79,843	152,861	137,763	585,612	1,392,652
Percent of Total SLRE Watershed	16%	16%	6%	11%	10%	42%	
Total Nitrogen load, pounds	1,113,530	979,900	560,435	499,901	341,316	2,988,912	6,483,994
Percent of Total SLRE Watershed	17%	15%	9%	8%	5%	46%	
Total Nitrogen concentration, ppb	1,864	1,661	2,581	1,203	911	1,877	1,712
Total Phosphorus load, pounds	267,633	248,259	146,320	154,954	42,337	358,056	1,217,559
Percent of Total SLRE Watershed	22%	20%	12%	13%	3%	29%	
Total Phosphorus concentration, ppb	448	421	674	373	113	225	321
Total Suspended Solids load, pounds	1,482,646	3,095,210	6,818,189	2,174,217	1,595,310	145,531,979	160,697,552
Percent of Total SLRE Watershed	1%	2%	4%	1%	1%	91%	
Total Suspended Solids concentration, ppb	2,483	5,246	31,403	5,230	4,258	91,386	42,432

Note: Tidal Basins flows and loads are estimated – not measured.

Table 5. Summary of recent 10-yr average annual flows and loads to the SLRE.

WY2009-2018 Average	C-23 Canal	C-24 Canal	C-44 Canal to SLRE	Ten Mile Creek	Tidal Basins	Lake Okeechobee	Total to SLRE
Flow, acre feet	107,381	139,810	99,939	104,136	137,317	225,919	814,501
Percent of Total SLRE Watershed	13%	17%	12%	13%	17%	28%	
Total Nitrogen load, pounds	500,456	588,706	425,464	319,391	316,801	954,471	3,105,287
Percent of Total SLRE Watershed	16%	19%	14%	10%	10%	31%	
Total Nitrogen concentration, ppb	1,714	1,548	1,566	1,128	848	1,554	1,421
Total Phosphorus load, pounds	133,522	128,316	93,845	88,451	36,479	104,246	584,858
Percent of Total SLRE Watershed	23%	22%	16%	15%	6%	18%	
Total Phosphorus concentration, ppb	457	337	345	312	98	170	262
Total Suspended Solids load, pounds	1,231,578	1,623,105	876,984	1,703,149	1,741,195	27,146,558	34,322,570
Percent of Total SLRE Watershed	4%	5%	3%	5%	5%	79%	
Total Suspended Solids concentration, ppb	4,218	4,269	3,227	6,014	4,663	44,187	14,936

Note: Tidal Basins flows and loads are estimated – not measured.

3. ASSESSMENT OF WATER QUALITY RELATIVE TO TMDL AND BMAP TARGETS

A prior report described the details of development of annual performance measures that account for hydrologic variability (Goforth 2016). An assessment of the nutrient levels from the SLRE watershed and Lake Okeechobee was conducted focusing on two aspects:

1. WY2018 water quality conditions; and
2. The most recent 10-yr period compared to the base period (“starting period” in the BMAP report) and TMDL and BMAP Targets.

WY2018 Water Quality Conditions


Nutrient levels for the most recent water year are compared to base period levels, BMAP Phase 1 goals and TMDL goals in the figures below. The base period loads were adjusted for hydrologic variability using the regression equations in Goforth (2016).

Total Nitrogen.

Loads. Improvement from the base period loading was observed for all basins except the C-44 Basin, which discharged 60 percent more nitrogen load than during the base period, even after adjusting for hydrologic variability (**Figure 8**). Lake Okeechobee contributed more than 79 percent more nitrogen than during the base period. The combined Total Nitrogen load from the C-44 Canal Basin and Lake Okeechobee that entered the SLRE through the C-44 Canal was 3.5 million pounds – **more than 10 times the TMDL allocation established by FDEP for that entry point into the SLRE.**

Concentrations. The Tidal Basins had the lowest TN concentration for WY2017 at 911 ppb. Every other basin and Lake Okeechobee exhibited higher TN concentrations than were observed during the base period.

Figure 8. WY2018 Total Nitrogen Levels Compared to Base Period and Goals

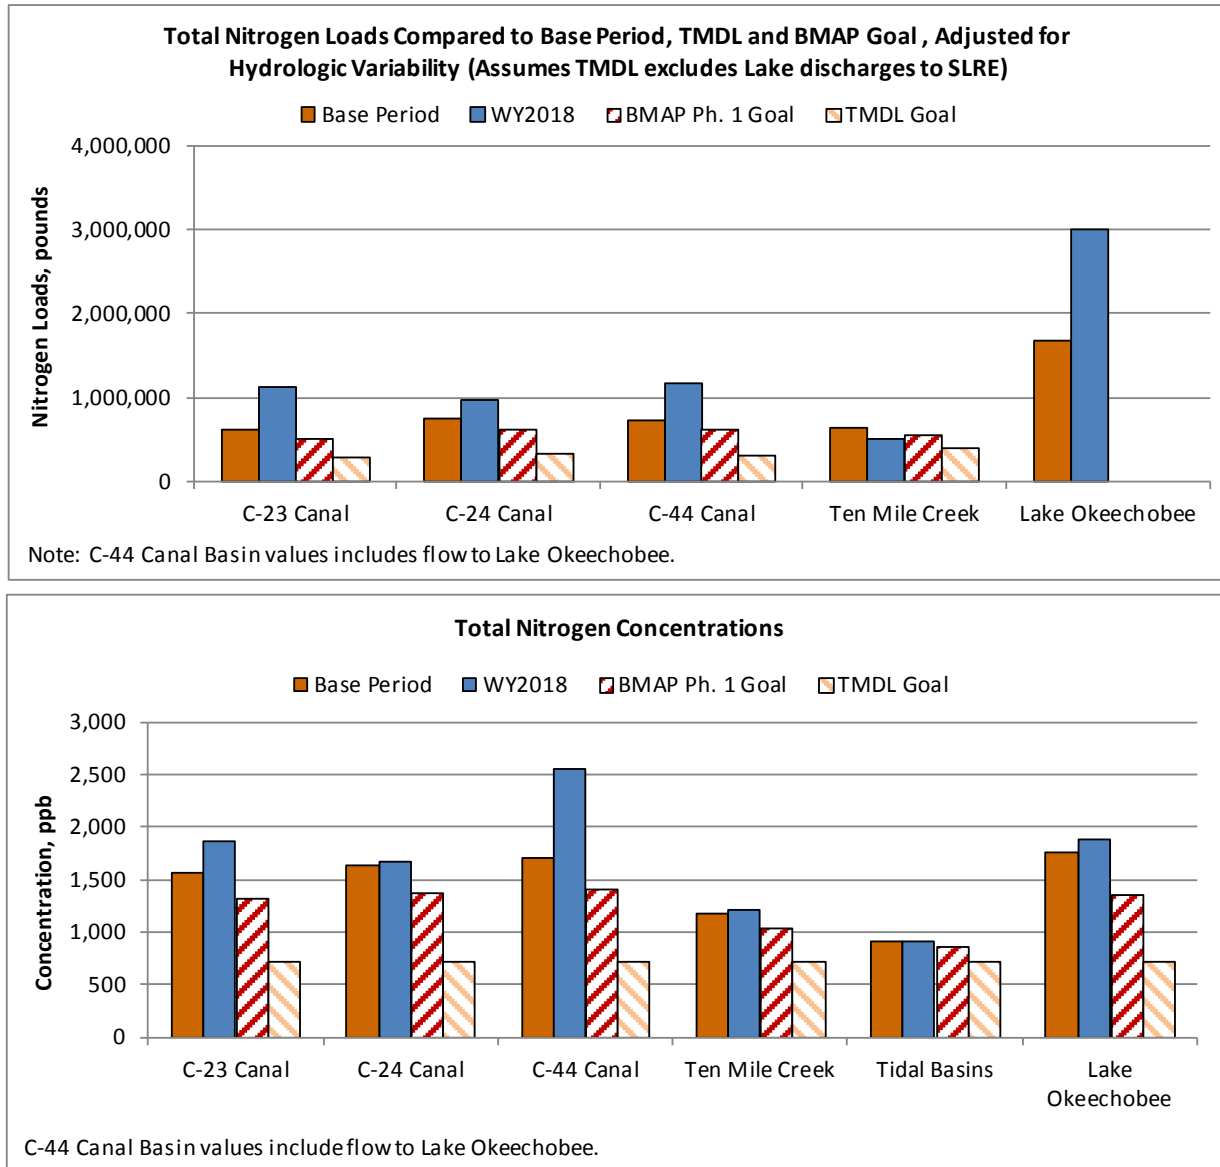

Note: The TMDL and BMAP goals are based on 10-yr averages; they are compared against annual values in these charts for information purposes only.

Total Phosphorus.



Loads. Improvement from the base period loading was observed for WY2018 for the C-23 Canal, C-24 Canal and Ten Mile Creek basins. The C-44 Canal Basin contributed approximately 139 percent more phosphorus load than during the base period even after adjusting for hydrologic variability (Figure 9). Lake Okeechobee contributed more than 138 percent more phosphorus than during the base period. The combined Total Phosphorus load from the C-44

Water Quality Assessment of the St. Lucie River Watershed – Water Year 2018 - DRAFT

Canal Basin and Lake Okeechobee that entered the SLRE through the C-44 Canal was more than 500,000 pounds – **more than 17 times the TMDL allocation established by FDEP for that entry point into the SLRE.**

Concentrations. The Tidal Basins had the lowest TP concentration (113 ppb) of the SLRE source basins during WY2018. No basin achieved the alternative BMAP Phase 1 goal in terms of concentration reduction.

Figure 9. Total Phosphorus Levels Compared to Base Period and Goals

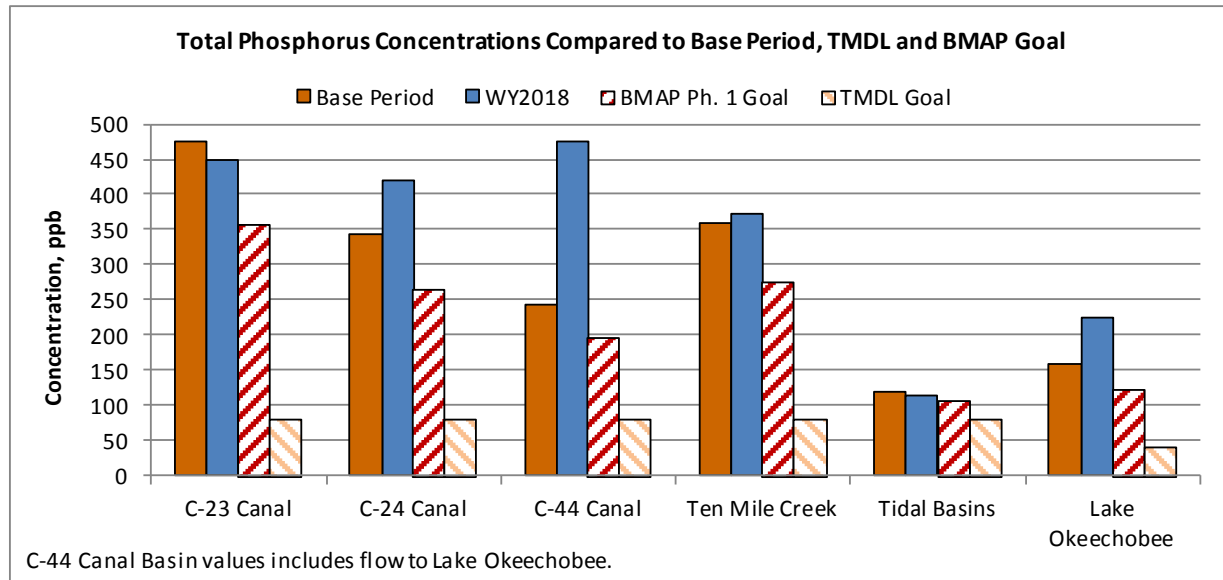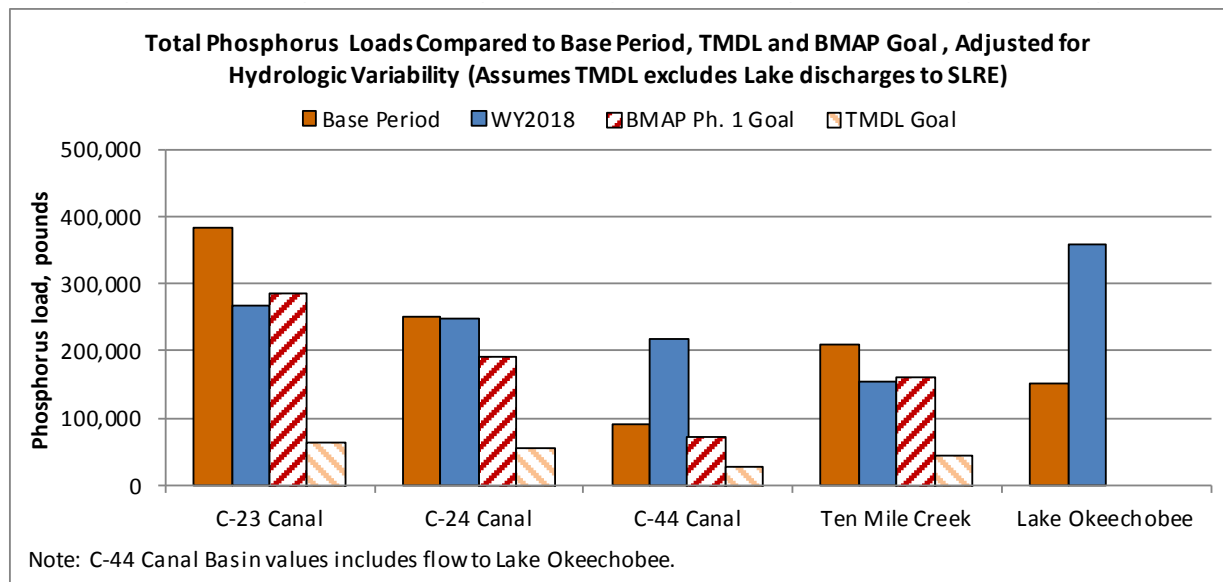

Note: The TMDL and BMAP goals are based on 10-yr averages; they are compared against annual values in these charts for information purposes only.

Assessment of the most recent 10-yr period compared to the Base Period and TMDL and BMAP Targets.

Assessments of the water quality from the SLRE watershed for the most recent 10-yr period, adjusted for hydrologic variability using the performance measures described above, are summarized in **Figures 10-11** and discussed below.

Total Nitrogen

Loads. Using the 10-year average annual loads and adjusting for hydrologic variability, the Phase 1 BMAP TN load reduction goals were met for the C-23 Canal Basin, the C-24 Canal Basin and the Ten Mile Creek Basin, but was not met for the C-44 Canal Basin. 10-yr trends indicate improving water quality for all basins except the C-44 Canal Basin, which discharged 7 percent greater loads than during the Base Period.

Concentrations (Tidal Basins and Lake Okeechobee). The 10-yr concentration for the Tidal Basins achieved the BMAP Phase 1 goal of 7 percent reduction.

Total Phosphorus

Loads. Using the 10-year average annual loads and adjusting for hydrologic variability, the Phase 1 BMAP phosphorus load reduction goals were met for the C-23 Canal, the C-24 Canal and the Ten Mile Creek Basins, but was not met for the C-44 Canal Basin. 10-yr loading trends indicate improving water quality for all basins except the C-44 Canal Basin, which discharged 31 percent greater load than during the Base Period.

Concentrations (Tidal Basins and Lake Okeechobee). The 10-yr concentration for the Tidal Basins achieved the BMAP Phase 1 goal of 9 percent reduction. By contrast, the 10-year flow-weighted mean concentration for lake discharges did not meet the BMAP Phase 1 goal, and in fact was 8 percent more than the Base Period. The 10-year trend in concentrations for the Tidal Basins indicates improving water quality, while the trend for Lake Okeechobee discharge concentrations indicates a worsening compared to the Base Period.

Figure 10. Comparison of 10-yr Average Annual Nitrogen Loads




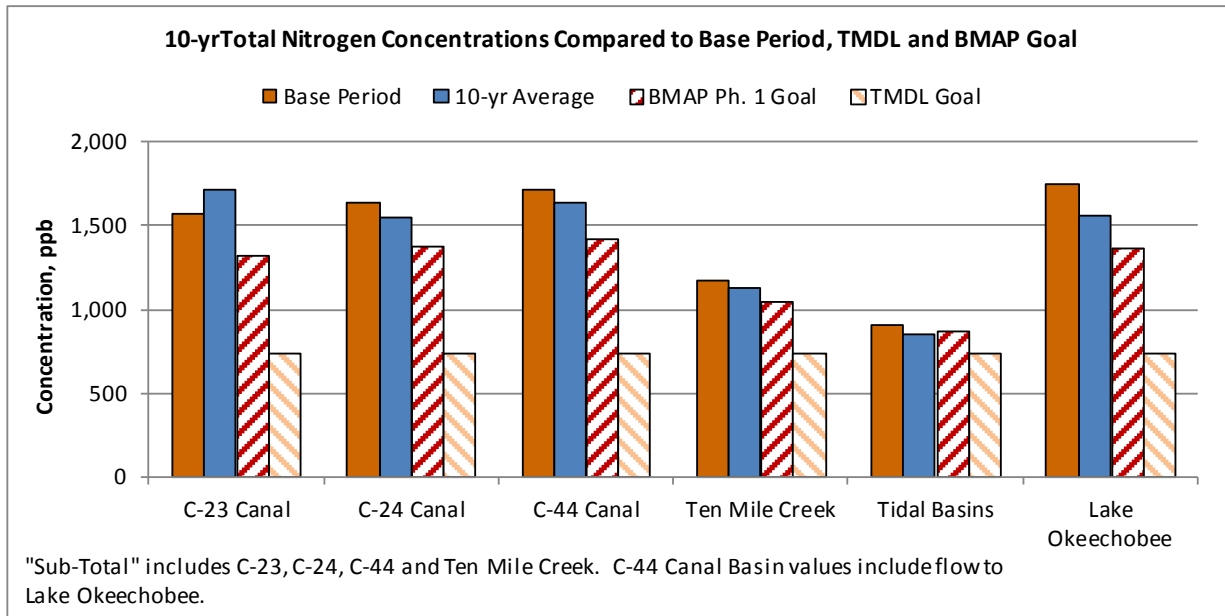


Figure 11. Comparison of 10-yr Average Annual Phosphorus Loads

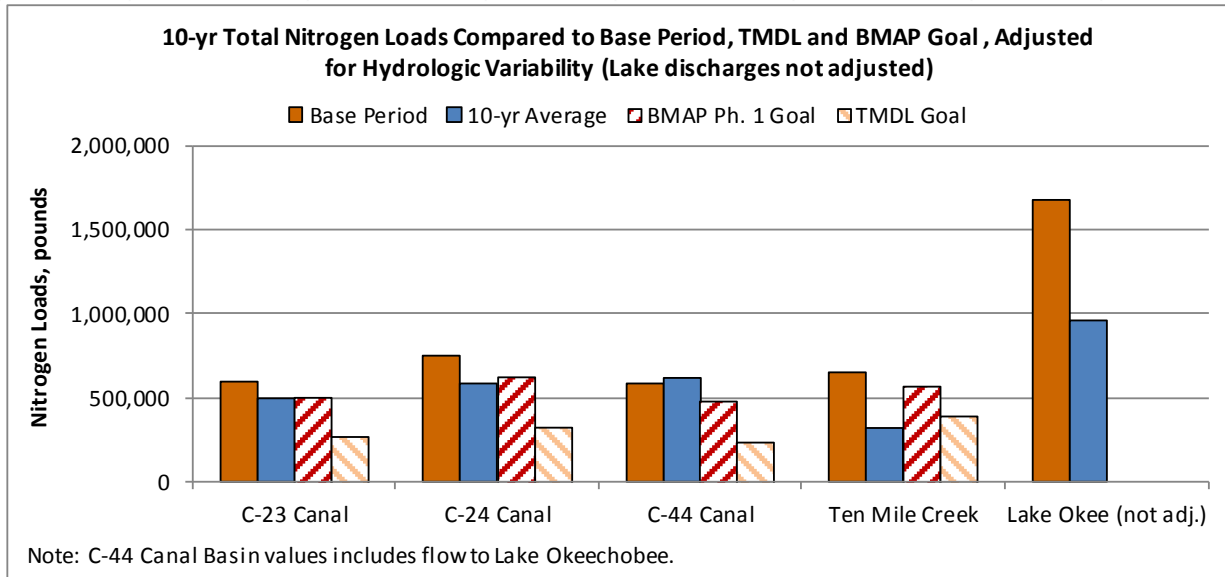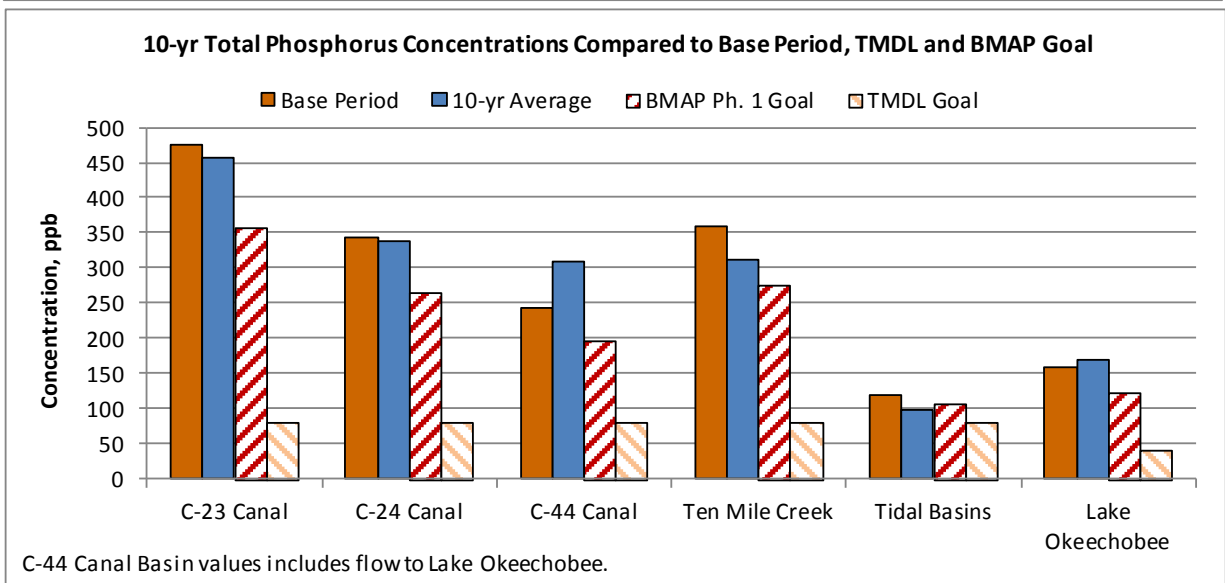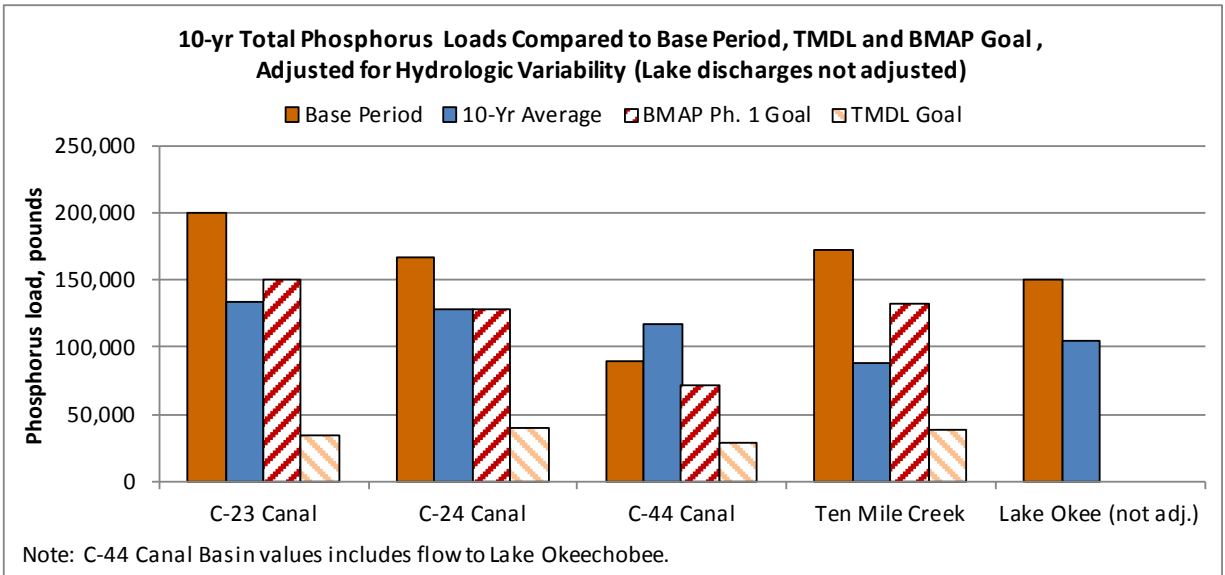

Nitrogen Loading from Septic Tanks. During 2016, several agricultural interests erroneously stated that the primary source of nutrient loads to the SLRE is the “200,000 septic tanks” that line Martin County waterways (e.g., saveourfarms.com 2016). In fact, the Florida Department of Health notes there are less than 1/10th the number of alleged septic tanks in Martin County: 16,172 (FDOH 2015). In addition, a SFWMD Governing Board member erroneously stated that 80 percent of the nutrient loading to the SLRE was due to local septic tanks (Smith 2016).


The fact is that Martin County and the City of Stuart have significantly reduced nutrient loading to the SLRE from individual and community septic systems and through other local projects. These include:

- Elimination of seventy (70) wastewater package plants, which annually prevent the discharge of more than 560,000 pounds of nitrogen and more than 140,000 pounds of phosphorus (Polley 2014).
- Conversion of more than 1,700 septic tanks to centralized sanitary sewers, removing an estimated 15,400 pounds per year of nitrogen (Fielding 2015).
- Since 2000 Martin County has invested \$50+ million in 25 stormwater projects, with approximately 30,000 pounds per year of nitrogen removal (Fielding 2015).

As a result of these projects, Martin County has exceeded all the nitrogen load reductions required under the State’s Basin Management Action Plan (BMAP); nonetheless, the County is actively planning additional septic to sewer conversion projects that will further reduce nutrient loading to the River (FDEP 2015).

Researchers at Florida Atlantic University (FAU) postulated that malfunctioning septic tanks are a primary source of nutrient loading to the SLRE (LaPointe and Herren 2016). However, estimates prepared by consultants to FDEP suggest loadings from septic tanks are about one-third estimates from FAU, and previous BMAP progress reports have documented that prior septic-to-sewer conversion projects have been very effective in reducing nutrient loads from septic systems, particularly in Martin County (Ye and Sun 2013, FDEP 2015). The documented decline in nutrient concentrations, particularly nitrate-nitrite, in the Tidal Basins shown in **Figure 12** provide further documentation of the effectiveness of these projects. Additional septic-to-sewer projects in Martin and St. Lucie Counties are underway.

Figure 12. Reduction in nitrate-nitrite concentrations in the Tidal Basins.

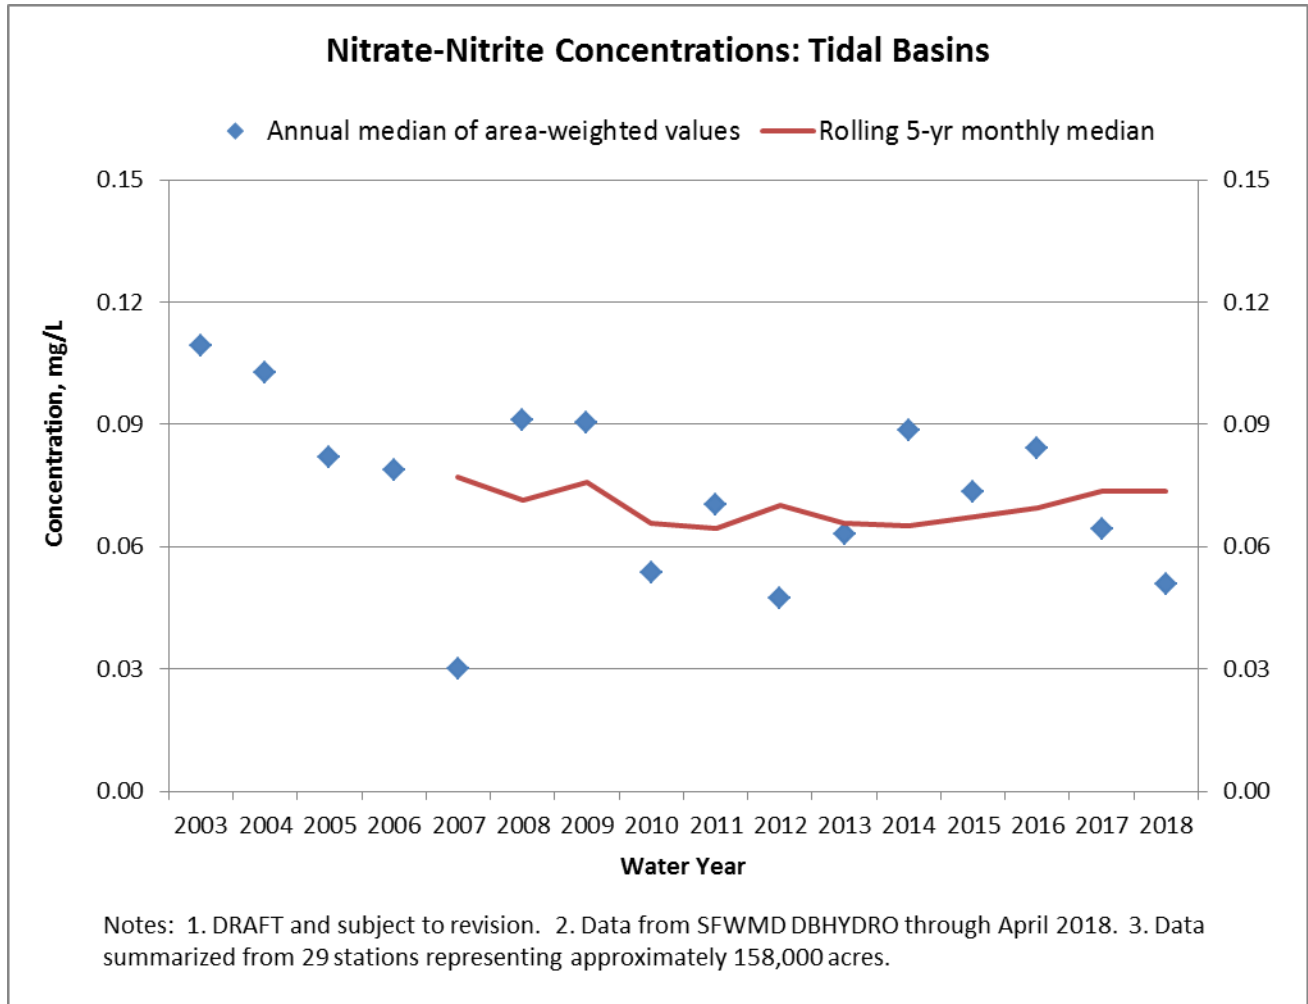

4. SUMMARY

An overall assessment of the water quality entering the SLRE is summarized in **Table 5** and described below.

Status. The assessment of “status” in each source basin was based on the WY2017 nutrient levels. For the Tidal Basins and Lake Okeechobee, concentrations were assessed; for all other source basins loads were assessed.

- “Good” indicates the water year achieved the TMDL;
- “Fair” indicates the water year exceeded the TMDL by less than 33%;
- “Poor” indicates the water year exceeded the TMDL by more than 33%.

Water Quality Assessment of the St. Lucie River Watershed – Water Year 2018 - DRAFT

The overall status of nutrient levels from the SLRE Watershed was “Poor”. The best water quality was exhibited by the highly urbanized Tidal Basins, which demonstrated a status of “Fair” for nitrogen.

Table 5. Water Quality Conditions Entering the SLRE.

Source Basin	Total Nitrogen		Total Phosphorus	
	WY2018 Status	10-yr Trend	WY2018 Status	10-yr Trend
C-23 Canal	Poor	Improving	Poor	Improving
C-24 Canal	Poor	Improving	Poor	Improving
<i>C-44 Canal</i>	<i>Poor</i>	<i>Worsening</i>	<i>Poor</i>	<i>Worsening</i>
Ten Mile Creek	Fair	Improving	Poor	Improving
Tidal Basins	Fair	Improving	Poor	Improving
Lake Okeechobee	Poor	Improving	Poor	Worsening
Total Inflow	Poor	Worsening	Poor	Worsening

Trend. The assessment of trend in each source basin was based on the most recent 10-yr average nutrient level compared to its base period. For the Tidal Basins and Lake Okeechobee, concentrations were assessed; for all other source basins loads were assessed.

- “Improving” indicates the 10-yr average nutrient level was below the base period value, adjusted for hydrologic variability;
- “Worsening” indicates the 10-yr average nutrient level was above the base period value, adjusted for hydrologic variability.

All the source basins except the C-44 Canal Basin and Lake Okeechobee exhibited an “Improving” trend for both nutrients. The C-44 Canal Basin demonstrated a “Worsening” trend in TP and TN when comparing the recent loads against the base period loads. The overall trend for both nutrients from the SLRE watershed exhibited a worsening trend for both nitrogen and phosphorus.

As a result of this assessment, FDEP and other agency staff should identify the successful load reduction measures being implemented in the better performing basins for potential application to other basins. In addition, agency staff should prioritize the other basins,

Water Quality Assessment of the St. Lucie River Watershed – Water Year 2018 - DRAFT

particularly the C-44 Canal Basin, for follow-up with landowners to improve nutrient control measures. During the 2015 stakeholder meeting, SFWMD staff acknowledged that the SFWMD was not enforcing Works of the District permits (Rule 40E-61) in the C-44 Canal Basin. The SFWMD is encouraged to start enforcing these permits in the C-44 Canal Basin and other basins around Lake Okeechobee.

5. COMPARISON TO FDEP BMAP ASSESSMENT APPROACH

The development and application of the performance measures described above offer sharp contrasts to the methods being utilized by the FDEP in their development of TMDLs and implementation of the BMAP for the SLRE, including the following.

1. The FDEP TMDL and BMAP method ignored pollution loading from Lake Okeechobee.
2. The FDEP BMAP method used simulated nutrient levels, and ignored abundant available flow and water quality data for the source basins.
3. The FDEP BMAP method has no annual assessment method.
4. The FDEP BMAP method has no means to account for hydrologic variability.
5. The FDEP BMAP method gives no information on the status and water quality conditions within individual basins.
6. The FDEP BMAP method ignores the annual variability in the proportion of C-44 Canal Basin runoff that flows to the SLRE (as opposed to Lake Okeechobee).

In their statewide BMAP Progress Report, FDEP estimated the 10-yr average nitrogen loading from the St Lucie Basin as 1,897,520 pounds, 63 percent less than estimated herein (FDEP 2018). FDEP also estimated the loading as 457,816 pounds, 20 percent less than estimated herein (FDEP 2018). The primary reason for these discrepancies is that FDEP ignores the loading from Lake Okeechobee.

Based on these contrasts, the following recommendations are made.

1. BMAP progress reports should present the observed nutrient and suspended sediment loads contained in Lake Okeechobee discharges to the St. Lucie River and Estuary.
2. The SLRE BMAP should be revised to identify projects to capture and treat Lake discharges to the St. Lucie River and Estuary sufficiently to achieve the watershed's TMDL and BMAP Goals.
3. BMAP progress reports should utilize available flow and water quality data – and not simulated values - in assessing and documenting water quality conditions for each basin and in assessing progress towards achieving the TMDLs and Phase 1 BMAP Goals.

Water Quality Assessment of the St. Lucie River Watershed – Water Year 2018 - DRAFT

4. BMAP Progress Reports should show basin-specific Phase 1 BMAP Goals, measured loads and load reductions, and document the progress towards achieving the TMDLs and BMAP Goals.
5. BMAP Progress Reports should present the measured 1996-2005 (i.e., the “Starting Period”) nutrient loads and concentrations for those basins with measured loads, and document actual load reductions by comparing measured loads/concentrations with the 1996-2005 values.
6. The TMDL and BMAP should be re-developed for the C-44 Canal Basin as a whole, recognizing the annual variability in the proportion of C-44 Canal Basin runoff that flows to the SLRE (as opposed to Lake Okeechobee).
7. The FDEP should recognize the limitations in establishing TMDLs and BMAP goals for the Tidal Basins and revise the TMDLs and BMAP goals to utilize concentrations: 81 ppb for TP and 720 ppb for TN.
8. The BMAP method for assessing current water quality conditions and calculating load reductions should account for hydrologic variability in manner similar to that developed by the SFWMD for the EAA and C-139 Basins (Rule 40E-63).
9. The BMAP Progress Reports should clearly note that the projected load reductions from agricultural BMPs have not been field verified, and may overestimate the load reductions. A similar caveat may be necessary for non-agricultural projects.
10. There should be a balanced set of requirements for municipal and agricultural source control projects regarding monitoring their effectiveness.
11. BMAP progress reports should document compliance with all nutrient discharge limits of existing permits issued to landowners in the St. Lucie River and Estuary Basin.
12. BMAP progress reports should use an annual reporting period consistent with the precedent established by the SFWMD, utilizing a Water Year of May 1 to April 30.

Additional details for each recommendation are described in Goforth 2015.

7. REFERENCES

Blake, N. 1980. Land into Water – Water into Land. University Presses of Florida.

Chapter 2016-1. Florida Water 2016 Bill. Committee Substitute for CS for Senate Bill No. 552.

FDEP 2008. TMDL report: Nutrient and dissolved oxygen TMDL for the St. Lucie Basin. Tallahassee, FL: Div. of Water Resource Management, Bureau of Watershed Management.

FDEP 2013. BMAP for the St. Lucie River Watershed. Tallahassee, FL: Bureau of Watershed Restoration, Division of Environmental Assessment and Restoration.

Water Quality Assessment of the St. Lucie River Watershed – Water Year 2018 - DRAFT

- FDEP 2015. 2nd Annual Progress Report for the St. Lucie River Watershed. Tallahassee, FL: Bur. of Watershed Restoration, Div. of Environmental Assessment and Restoration. Dec. 2015.
- FDEP 2016. TMDL website. <http://www.dep.state.fl.us/water/tmdl/>
- FDEP 2018. Florida Statewide Annual Report. June 30, 2018.
- FDOH 2015. Florida Water Management Inventory. December 4, 2015.
- Fielding, E. 2015. Op-ed in Stuart News. Pollution solutions in our own backyard: Septic-to-sewer conversions. October 13, 2015
- Goforth, G. 2015. Comments on the Draft 2015 Progress Report for the St. Lucie River and Estuary Basin Management Action Plan. Provided to FDEP staff on September 10, 2015. <http://www.garygoforth.net/Comments%20on%20the%20Draft%202015%20Progress%20Report%20-%2009%2010%202015%20-%20Goforth.pdf>
- Goforth, G. 2016. Water Quality Assessment of the St. Lucie River Watershed – Water Year 2016. <http://www.garygoforth.net/FINAL%20DRAFT%20-%20Water%20Quality%20Assessment%20of%20the%20SLRW%20-%20Water%20Year%202016.pdf>
- LaPointe, B. and Herren, L. 2016. 2015 Martin County Watershed To Reef Septic Study – Final Report. May 2016.
- Lyons, E. 1975. The Last Cracker Barrel.
- Martin County Board of County Commissioners 1930. Resolution seeking closure termination of Lake discharges. December 15, 1930.
- Polley, J. 2014. Inter-office Memorandum to Nicki Van Vonno. Subject: Package Wastewater Plants. August 7, 2014.
- Osborn, N. 2012. Oranges And Inlets: An Environmental History Of Florida’s Indian River Lagoon. Master’s Thesis Florida Atlantic University. August 2012.
- Save Our Farms 2016. <http://save-our-farms.com/algae/>
- SFWMD 2002. St. Lucie Minimum Flows and Levels – Draft. May 2002.
- SFWMD, FDEP, FDACS, Tetra Tech 2009. St. Lucie River Watershed Protection Plan. January 2009.

Water Quality Assessment of the St. Lucie River Watershed – Water Year 2018 - DRAFT

SFWMD et al. 2013. Draft – Technical Support Document: St. Lucie River Watershed Performance Metric Methodologies. December 2013.
<http://www.garygoforth.net/TSD%20for%20SLRW%20-%2012%2018%202013.pdf>

SFWMD 2015. At the BMAP progress meeting in Stuart, staff reported the agency does not enforce Works (40E-61) of the District permits.

SFWMD 2106. South Florida Environmental Report. March 2016.

Smith, N. 2016. <http://www.sunshinestatenews.com/story/groundhog-day-sfwmd>

USACE 2016. Draft - Dam Safety Modification Study for Herbert Hoover Dike – Environmental Impact Statement. Appendix B. June 2016.

Ye, Ming and Huaiwei Sun 2013. Estimation of Nitrogen Load from Removed Septic Systems to Surface Water Bodies in the City of Port St. Lucie, the City of Stuart, and Martin County. Prepared for the Florida Department of Environmental Protection. September 2013.





Water Quality Assessment of the St. Lucie River Watershed – Water Year 2018 - DRAFT

APPENDIX 1. HISTORICAL WATER QUALITY DATA

Annual Summary of Lake Okeechobee Discharges to the St Lucie River and Estuary

Water Year	C-44 Basin Rainfall inches	Lake Discharges AF	TP Load pounds	FWM TP Conc µg/L	TN Load pounds	FWM TN Conc µg/L	TSS Load pounds	FWM TSS Conc µg/L
1980	58.25	408,675	118,931	107	2,938,947	2,645	26,470,394	23,818
1981	37.19	63,084	15,027	88	404,360	2,357	825,914	4,814
1982	51.02	4,604	1,233	98	22,878	1,827	5,248,516	419,168
1983	69.84	952,232	483,492	187	4,764,127	1,840	126,107,899	48,700
1984	58.74	177,419	64,988	135	1,007,620	2,088	11,495,846	23,827
1985	47.69	130,776	46,652	131	543,499	1,528	6,219,661	17,489
1986	46.42	6,319	1,620	94	21,993	1,280	2,374,092	138,152
1987	50.94	35,011	8,177	86	194,181	2,040	872,468	9,164
1988	45.94	131,823	48,395	135	625,095	1,744	3,032,427	8,459
1989	41.42	110,357	37,811	126	476,203	1,587	3,544,287	11,810
1990	45.18	40,252	11,750	107	112,164	1,025	5,140,110	46,959
1991	53.84	3,243	1,333	151	12,808	1,452	2,706,317	306,860
1992	41.47	8,894	2,998	124	35,727	1,477	2,271,675	93,924
1993	67.53	125,944	46,909	137	506,692	1,479	3,337,961	9,746
1994	56.85	17,083	7,643	165	68,590	1,477	8,563,721	184,348
1995	66.40	520,631	196,699	139	2,363,613	1,669	23,745,118	16,772
1996	69.99	748,625	221,851	109	2,688,173	1,320	30,256,538	14,862
1997	47.11	74,968	20,169	99	258,973	1,270	3,862,713	18,947
1998	56.93	1,020,158	511,820	184	5,758,028	2,076	98,993,658	35,684
1999	46.22	68,661	24,953	134	267,275	1,431	2,614,497	14,003
2000	60.74	220,120	97,944	164	1,119,743	1,871	16,528,935	27,613
2001	34.60	95,831	34,095	131	398,908	1,531	9,187,068	35,253
2002	57.14	7,622	2,738	132	26,090	1,259	2,843,045	137,162
2003	51.51	210,133	82,484	144	876,800	1,534	6,790,783	11,884
2004	45.70	497,599	175,182	129	1,897,219	1,402	29,945,184	22,130
2005	55.91	568,903	334,378	216	3,435,851	2,221	89,311,749	57,730
2006	65.64	837,413	504,434	222	4,087,935	1,795	131,699,956	57,833
2007	30.61	8,800	3,413	143	29,615	1,238	4,370,521	182,628
2008	53.60	519	215	153	1,964	1,391	11,239,562	7,961,770
2009	42.95	109,296	54,584	184	554,227	1,865	16,508,436	55,544
2010	55.70	48,781	19,916	150	202,622	1,527	7,562,974	57,013
2011	32.28	229,568	80,370	129	822,212	1,317	6,153,579	9,857
2012	40.94	5,094	1,850	134	18,420	1,330	4,717,870	340,593
2013	48.06	73,136	25,325	127	275,894	1,387	7,115,212	35,776
2014	54.19	419,378	156,877	138	1,468,198	1,287	21,409,471	18,773
2015	43.18	80,249	31,315	143	279,058	1,279	2,653,241	12,158
2016	46.19	369,871	186,695	186	1,613,039	1,604	36,742,257	36,530
2017	40.00	338,202	127,468	139	1,322,123	1,438	23,070,557	25,085
2018	47.45	585,612	358,056	225	2,988,912	1,877	145,531,979	91,386
<i>WY1980-2018 Average</i>	<i>50.39</i>	<i>239,869</i>	<i>106,405</i>	<i>163</i>	<i>1,140,764</i>	<i>1,749</i>	<i>24,129,902</i>	<i>36,992</i>
<i>WY1996-2005 Average</i>	<i>52.58</i>	<i>351,262</i>	<i>150,561</i>	<i>158</i>	<i>1,672,706</i>	<i>1,751</i>	<i>29,033,417</i>	<i>30,395</i>
<i>Current 10-yr Average</i>	<i>45.09</i>	<i>225,919</i>	<i>104,246</i>	<i>170</i>	<i>954,471</i>	<i>1,554</i>	<i>27,146,558</i>	<i>44,187</i>
Difference	-14%	-36%	-31%	8%	-43%	-11%	-6%	45%

Water Quality Assessment of the St. Lucie River Watershed – Water Year 2018 - DRAFT

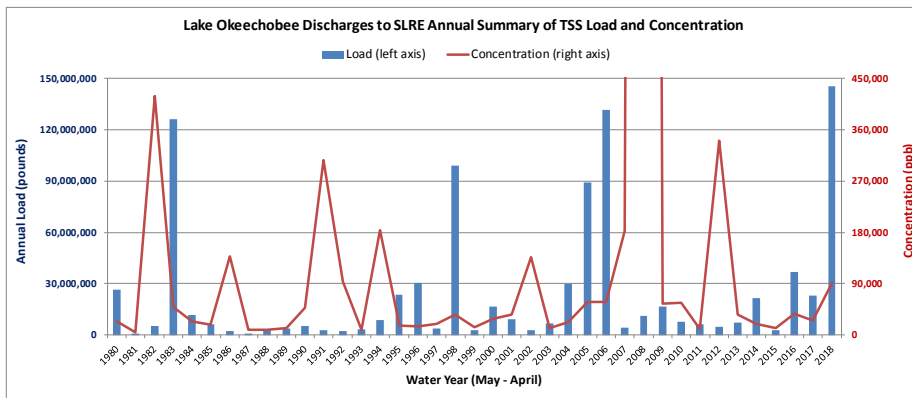
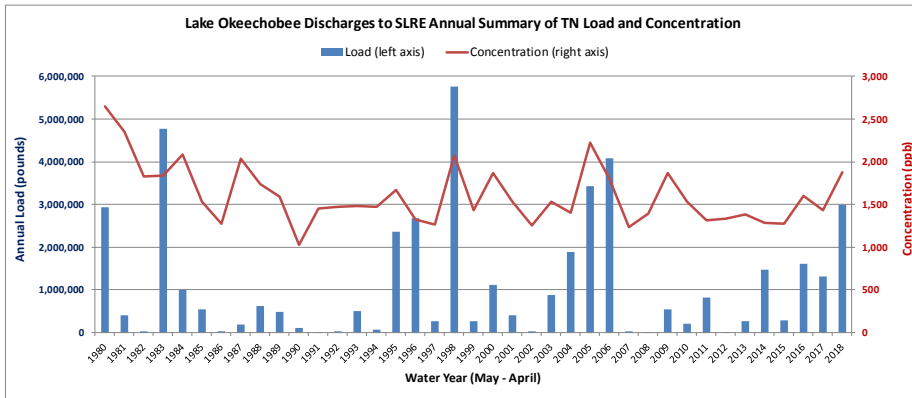
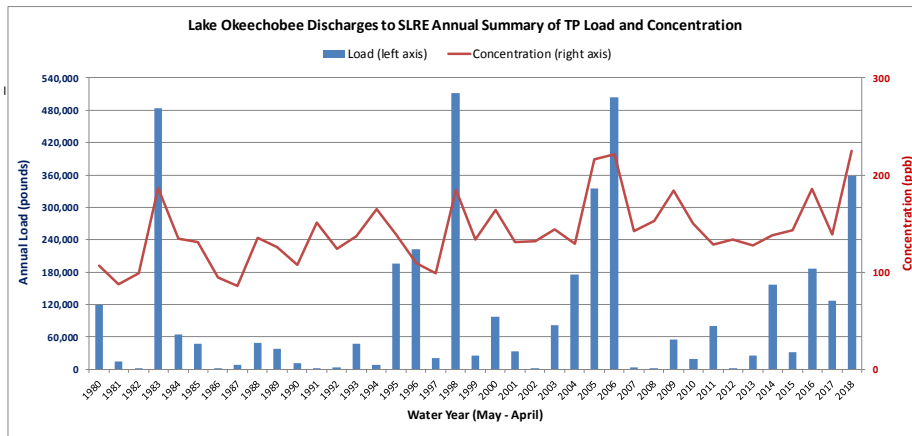
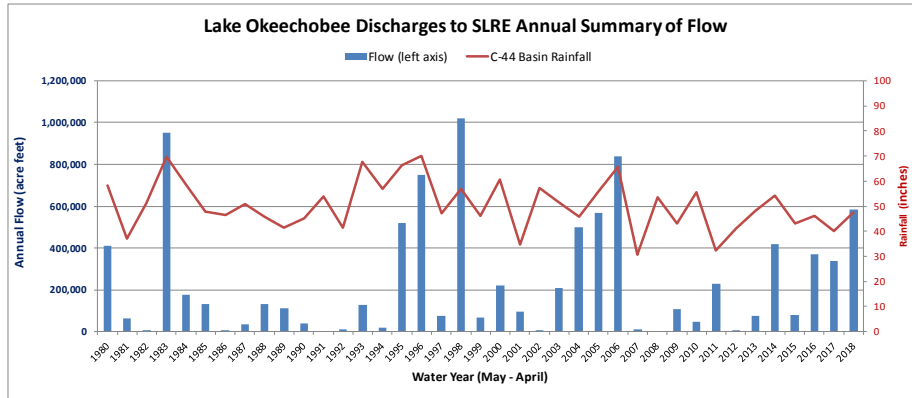


Water Quality Assessment of the St. Lucie River Watershed – Water Year 2018 - DRAFT

Annual Summary of Flows and Loads from the C-23 Canal Basin

Water Year	Basin Rainfall inches	Basin Flow AF	TP Load pounds	FWM TP Conc µg/L	TN Load pounds	FWM TN Conc µg/L	TSS Load pounds	FWM TSS Conc µg/L
1996	65.35	280,758	330,424	433	1,227,995	1,608	12,922,456	16,926
1997	46.21	76,826	44,094	211	275,330	1,318	777,968	3,724
1998	53.38	157,211	155,006	363	691,302	1,617	1,100,725	2,575
1999	41.95	75,674	100,720	489	320,679	1,558	571,796	2,779
2000	51.68	175,031	260,173	547	811,320	1,705	2,917,375	6,129
2001	35.93	38,331	37,882	363	191,091	1,833	506,625	4,860
2002	43.16	139,212	202,463	535	616,797	1,629	4,640,951	12,259
2003	51.06	125,215	134,302	394	517,426	1,520	2,449,136	7,193
2004	41.73	139,689	178,613	470	585,625	1,542	2,518,307	6,629
2005	65.32	232,805	414,965	655	907,802	1,434	22,321,213	35,258
2006	67.95	297,209	376,213	465	1,307,351	1,618	2,296,280	2,841
2007	33.97	39,871	39,798	367	210,552	1,942	516,026	4,759
2008	48.53	96,813	131,876	501	436,109	1,657	1,653,257	6,280
2009	40.11	114,820	180,602	578	545,325	1,747	3,238,415	10,372
2010	58.64	112,338	98,382	322	459,942	1,506	1,228,895	4,023
2011	35.94	33,643	27,122	296	136,294	1,490	344,187	3,762
2012	45.93	60,600	60,666	368	291,478	1,769	649,029	3,938
2013	48.95	85,776	114,702	492	383,126	1,643	674,920	2,893
2014	61.24	169,434	205,469	446	795,045	1,726	1,681,869	3,650
2015	48.36	104,991	126,147	442	447,289	1,567	924,204	3,237
2016	56.98	106,699	191,685	661	571,498	1,970	1,215,143	4,188
2017	43.70	65,889	62,811	351	261,029	1,457	876,471	4,892
2018	71.34	219,620	267,633	448	1,113,530	1,864	1,482,646	2,483
<i>WY1996-2018 Average</i>	<i>50.32</i>	<i>128,194</i>	<i>162,685</i>	<i>467</i>	<i>569,736</i>	<i>1,634</i>	<i>2,935,126</i>	<i>8,420</i>
<i>WY1996-2005 Average</i>	<i>49.58</i>	<i>144,075</i>	<i>185,864</i>	<i>474</i>	<i>614,537</i>	<i>1,569</i>	<i>5,072,655</i>	<i>12,947</i>
<i>Current 10-yr Average</i>	<i>51.12</i>	<i>107,381</i>	<i>133,522</i>	<i>457</i>	<i>500,456</i>	<i>1,714</i>	<i>1,231,578</i>	<i>4,218</i>
Difference	3%	-25%	-28%	-4%	-19%	9%	-76%	-67%

Water Quality Assessment of the St. Lucie River Watershed – Water Year 2018 - DRAFT

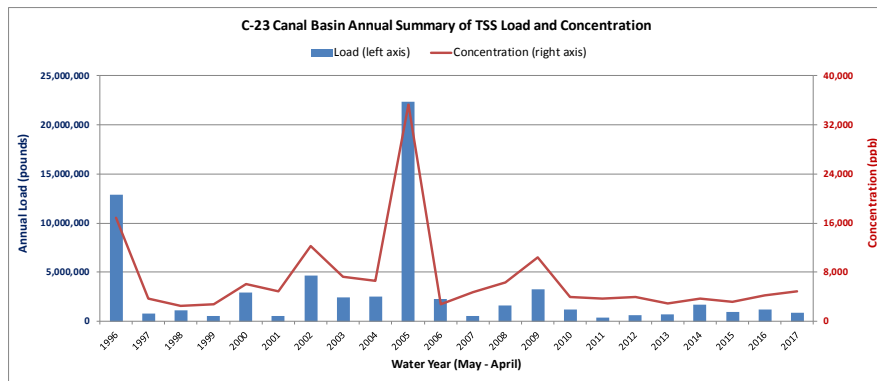
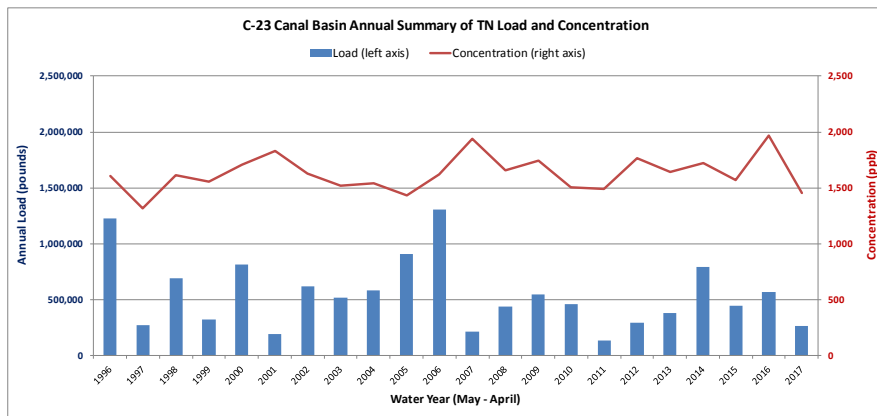
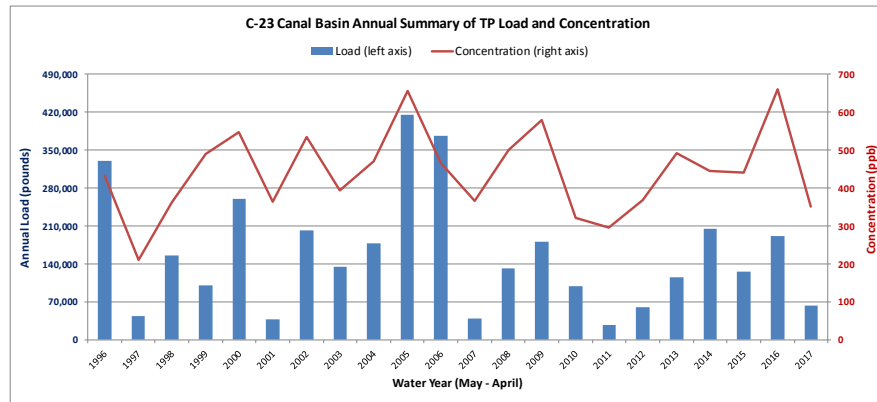
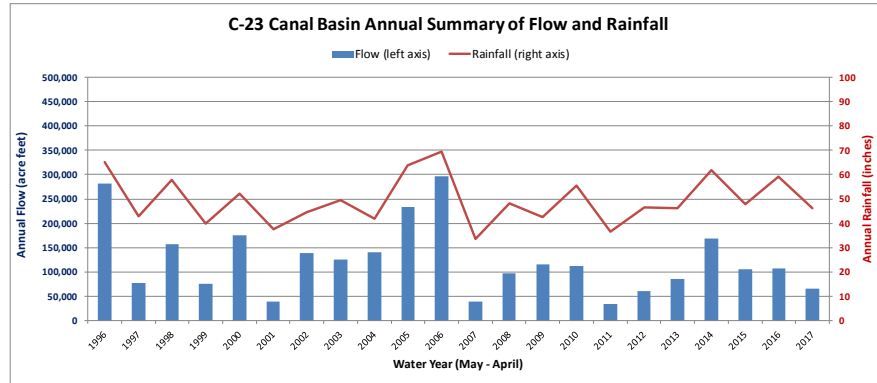


Water Quality Assessment of the St. Lucie River Watershed – Water Year 2018 - DRAFT

Annual Summary of Flows and Loads from the C-24 Canal Basin

Water Year	Basin Rainfall inches	Basin Flow AF	TP Load pounds	FWM TP Conc µg/L	TN Load pounds	FWM TN Conc µg/L	TSS Load pounds	FWM TSS Conc µg/L
1980	55.90	166,563	166,037	367	1,097,441	2,423	2,717,690	6,000
1981	29.17	15,174	12,940	314	126,328	3,061	247,585	6,000
1982	49.70	91,552	87,747	352	640,549	2,573	1,983,392	7,967
1983	53.51	283,915	159,070	206	1,299,451	1,683	6,256,287	8,103
1984	46.11	122,741	94,838	284	591,753	1,773	1,920,968	5,755
1985	34.48	92,555	88,643	352	478,219	1,900	530,875	2,109
1986	44.80	121,639	133,241	403	625,405	1,891	868,503	2,626
1987	43.62	113,169	108,770	353	688,723	2,238	8,012,360	26,035
1988	33.71	87,426	100,549	423	403,562	1,697	698,954	2,940
1989	37.44	46,904	43,711	343	187,571	1,471	254,295	1,994
1990	32.14	70,470	61,841	323	306,941	1,602	803,424	4,193
1991	59.54	184,221	217,550	434	754,914	1,507	4,017,878	8,020
1992	50.06	148,360	121,711	302	448,836	1,113	838,651	2,079
1993	65.92	273,309	241,856	325	1,047,481	1,409	2,285,925	3,076
1994	44.95	139,535	130,853	345	1,086,370	2,863	1,414,448	3,728
1995	65.15	264,480	174,365	242	987,526	1,373	1,618,912	2,251
1996	62.96	240,708	165,637	253	930,541	1,422	2,113,692	3,229
1997	42.52	97,160	60,237	228	418,991	1,586	1,934,774	7,323
1998	60.28	209,835	160,051	280	1,046,405	1,834	1,469,743	2,576
1999	43.01	115,946	102,429	325	562,299	1,783	543,555	1,724
2000	52.75	204,809	193,757	348	966,161	1,735	2,415,590	4,337
2001	41.27	50,232	43,510	319	219,827	1,609	553,639	4,053
2002	45.28	206,299	188,233	336	911,650	1,625	1,480,212	2,639
2003	51.86	156,587	145,163	341	662,179	1,555	3,638,067	8,544
2004	42.99	156,125	132,912	313	617,474	1,454	1,320,521	3,110
2005	59.90	239,507	368,059	565	1,119,294	1,719	10,001,612	15,356
2006	60.29	259,530	263,728	374	1,028,892	1,458	2,137,437	3,029
2007	33.99	41,877	56,853	499	212,147	1,863	204,781	1,798
2008	46.22	116,298	128,023	405	512,591	1,621	1,130,353	3,574
2009	44.66	135,732	176,857	479	590,256	1,599	3,336,446	9,039
2010	57.48	159,496	144,789	334	678,537	1,564	1,312,414	3,026
2011	37.23	78,976	57,652	268	365,650	1,703	1,004,423	4,677
2012	49.61	141,246	120,693	314	712,653	1,855	2,005,512	5,221
2013	49.57	141,852	120,396	312	602,513	1,562	1,708,869	4,430
2014	55.36	140,325	125,462	329	550,596	1,443	819,488	2,148
2015	51.67	104,865	86,171	302	394,500	1,383	1,043,552	3,659
2016	62.21	160,646	115,999	266	616,567	1,411	1,263,245	2,892
2017	49.46	118,012	86,880	271	395,884	1,234	641,891	2,000
2018	63.44	216,954	248,012	420	980,181	1,661	3,095,210	5,246
<i>WY1980-2018 Average</i>	<i>48.98</i>	<i>146,539</i>	<i>134,237</i>	<i>337</i>	<i>663,253</i>	<i>1,664</i>	<i>2,042,184</i>	<i>5,125</i>
<i>WY1996-2005 Average</i>	<i>50.28</i>	<i>167,721</i>	<i>155,999</i>	<i>342</i>	<i>745,482</i>	<i>1,634</i>	<i>2,547,141</i>	<i>5,585</i>
<i>Current 10-yr Average</i>	<i>52.07</i>	<i>139,810</i>	<i>128,291</i>	<i>337</i>	<i>588,734</i>	<i>1,548</i>	<i>1,623,105</i>	<i>4,269</i>
Difference	4%	-17%	-18%	-1%	-21%	-5%	-36%	-24%

Water Quality Assessment of the St. Lucie River Watershed – Water Year 2018 - DRAFT

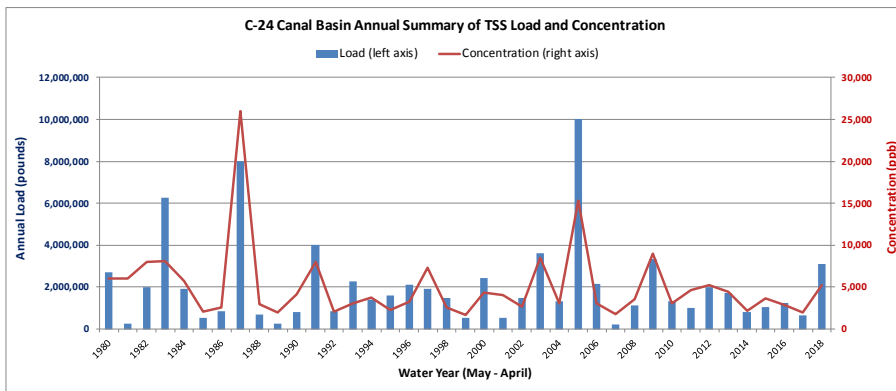
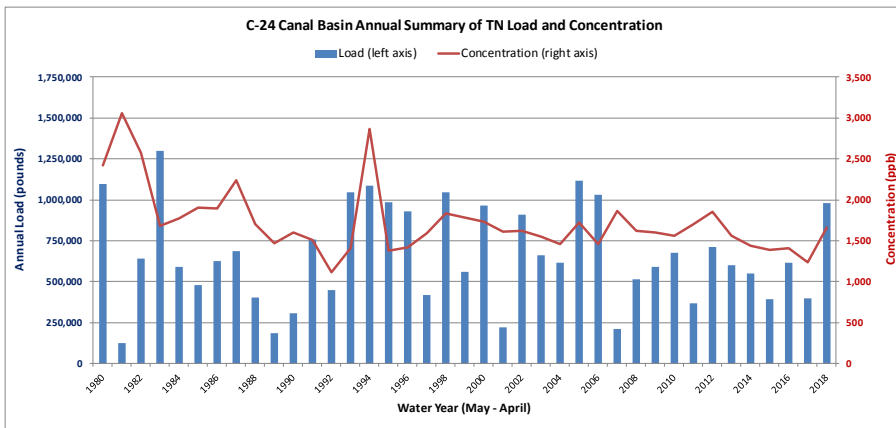
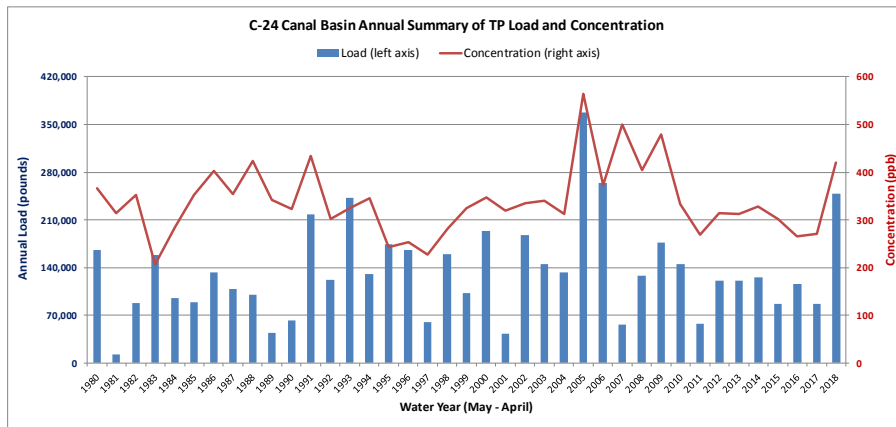
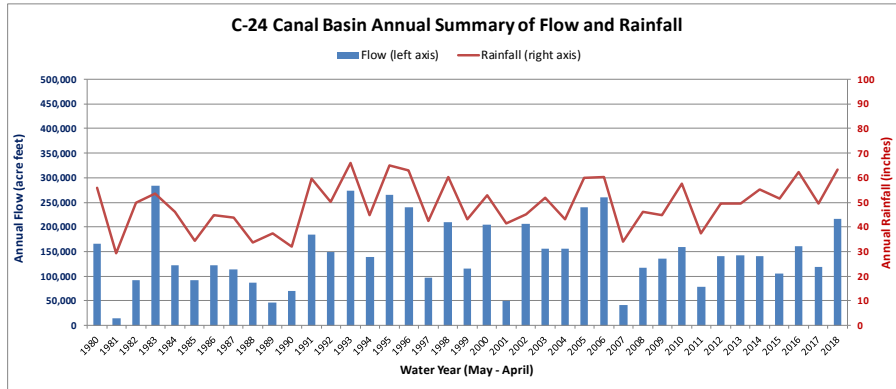


Water Quality Assessment of the St. Lucie River Watershed – Water Year 2018 - DRAFT

Annual Summary of Flows and Loads from the C-44 Canal Basin (to Lake and SLRE)

Water Year	Rainfall inches	Flow AF	TP Load pounds	TP Conc µg/L	TN Load pounds	TN Conc µg/L	TSS Load pounds	TSS Conc µg/L
1980	58.25	91,598	111,221	447	324,585	1,303	1,090,623	4,378
1981	37.19	27,676	14,168	188	119,896	1,593	16,755	223
1982	51.02	84,775	50,504	219	538,072	2,334	4,631,969	20,092
1983	69.84	200,608	89,819	165	1,439,689	2,639	54,544,213	99,984
1984	58.74	216,422	71,877	122	906,326	1,540	3,825,464	6,500
1985	47.69	192,012	108,654	208	862,262	1,651	468,496	897
1986	46.42	231,132	120,430	192	1,273,371	2,026	5,747,074	9,144
1987	50.94	157,734	92,635	216	706,659	1,647	1,357,381	3,165
1988	45.94	283,533	114,811	149	1,174,569	1,523	7,869,706	10,207
1989	41.42	280,208	120,205	158	1,123,237	1,474	329,905	433
1990	45.18	245,568	95,382	143	946,214	1,417	575,195	861
1991	53.84	148,997	60,613	150	565,388	1,395	330,676	816
1992	41.47	209,541	85,690	150	497,605	873	1,239,199	2,175
1993	67.53	359,991	168,443	172	1,111,289	1,135	1,293,516	1,321
1994	56.85	177,178	65,464	136	760,889	1,579	1,047,128	2,173
1995	66.40	439,081	195,660	164	1,433,521	1,201	2,771,975	2,322
1996	69.99	307,565	173,363	207	2,283,833	2,731	938,733	1,122
1997	47.11	129,268	44,196	126	675,173	1,921	342,480	974
1998	56.93	157,242	55,000	129	395,149	924	466,281	1,090
1999	46.22	148,620	61,449	152	550,544	1,362	178,338	441
2000	60.74	218,669	152,829	257	797,115	1,340	312,248	525
2001	34.60	104,182	45,807	162	401,498	1,417	388,937	1,373
2002	57.14	135,035	113,746	310	682,648	1,859	341,719	931
2003	51.51	145,180	107,856	273	409,276	1,037	110,931	281
2004	45.70	213,456	176,683	304	746,505	1,286	849,225	1,463
2005	55.91	232,251	259,138	410	1,383,856	2,191	2,739,731	4,338
2006	65.64	381,862	275,750	266	2,587,689	2,492	7,362,561	7,090
2007	30.61	66,532	35,402	196	280,558	1,551	516,233	2,853
2008	53.60	191,652	166,372	319	999,321	1,917	1,401,970	2,690
2009	42.95	121,649	126,455	382	542,174	1,639	1,087,327	3,287
2010	55.70	143,443	84,195	216	542,082	1,390	726,761	1,863
2011	32.28	60,241	45,157	276	206,213	1,259	117,984	720
2012	40.94	53,882	24,256	166	251,376	1,716	576,794	3,936
2013	48.06	160,985	131,395	300	677,515	1,548	636,030	1,453
2014	54.19	284,575	247,135	319	1,280,958	1,655	646,049	835
2015	43.18	124,861	87,709	258	422,392	1,244	178,061	524
2016	46.19	192,202	137,644	263	751,933	1,439	635,951	1,217
2017	40.00	87,323	69,770	294	365,133	1,538	525,430	2,213
2018	47.45	169,483	218,531	474	1,177,370	2,555	7,455,764	16,177
WY1980-2018 Average	50.39	184,005	112,959	226	825,484	1,650	2,966,021	5,928
WY1996-2005 Average	52.58	179,147	119,007	244	832,560	1,709	666,862	1,369
Current 10-yr Average	45.09	139,864	117,225	308	621,715	1,635	1,258,615	3,309
Difference	-14%	-22%	-1%	26%	-25%	-4%	89%	142%

Water Quality Assessment of the St. Lucie River Watershed – Water Year 2018 - DRAFT

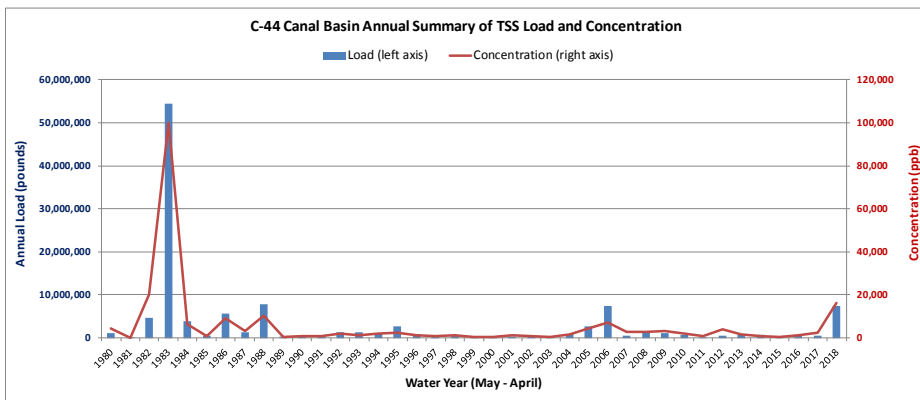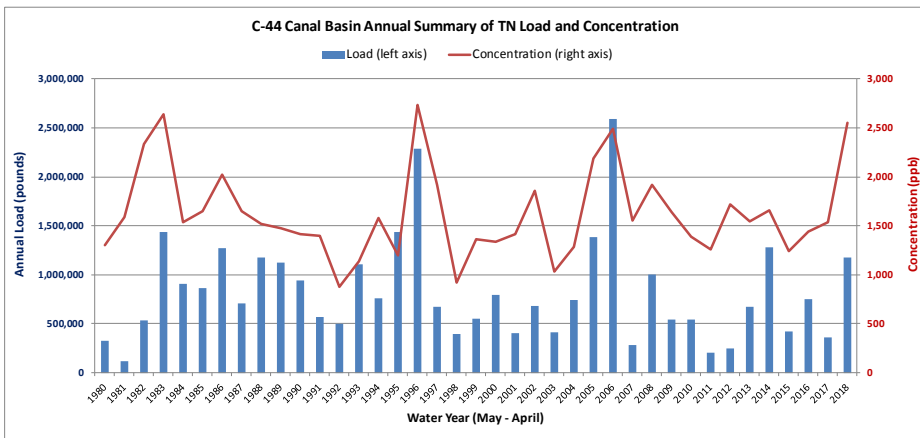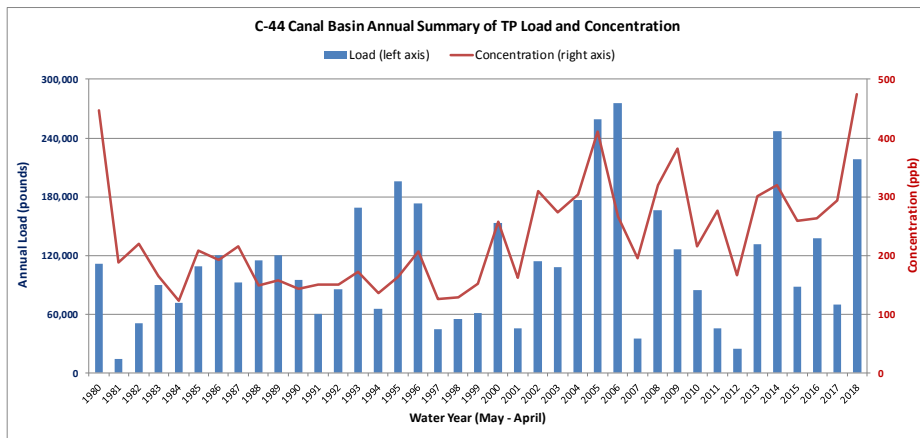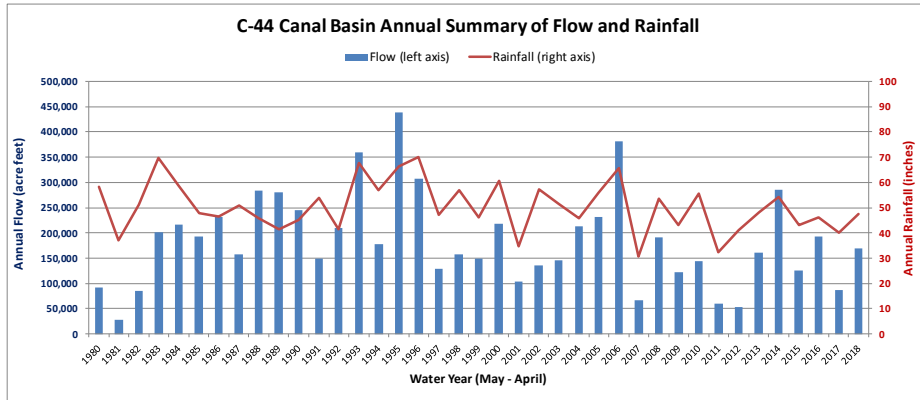





Water Quality Assessment of the St. Lucie River Watershed – Water Year 2018 - DRAFT

Annual Summary of Flows and Loads from the Ten Mile Creek Basin

Water Year	Basin Rainfall inches	Basin Flow AF	TP Load pounds	FWM TP Conc µg/L	TN Load pounds	FWM TN Conc µg/L	TSS Load pounds	FWM TSS Conc µg/L
1996	68.09	76,829	51,198	245	243,274	1,164	611,150	2,925
1997	53.45	46,572	28,814	228	147,466	1,164	625,393	4,938
1998	54.02	86,468	62,136	264	273,795	1,164	612,275	2,604
1999	40.35	42,737	34,319	295	135,323	1,164	253,938	2,185
2000	44.68	115,143	97,509	311	364,591	1,164	1,086,526	3,470
2001	30.22	46,099	49,029	391	139,805	1,115	203,113	1,620
2002	55.31	110,997	128,292	425	419,349	1,389	802,333	2,658
2003	50.48	271,838	273,099	369	819,413	1,108	3,456,852	4,676
2004	48.67	253,018	231,788	337	676,280	983	1,271,027	1,847
2005	53.55	301,142	362,600	443	1,089,565	1,330	6,057,049	7,396
2006	65.01	136,353	146,349	395	475,830	1,283	1,769,843	4,773
2007	38.41	59,524	37,552	232	153,148	946	439,801	2,717
2008	48.01	110,235	120,599	402	352,551	1,176	1,071,333	3,574
2009	50.42	145,966	213,636	538	624,683	1,574	4,379,953	11,034
2010	63.14	91,964	62,820	251	280,036	1,120	831,537	3,325
2011	37.36	50,463	20,266	148	106,644	777	205,842	1,500
2012	51.55	94,488	70,616	275	304,340	1,184	893,846	3,479
2013	48.99	82,746	53,782	239	234,585	1,043	754,968	3,355
2014	57.07	85,081	51,840	224	226,043	977	704,446	3,045
2015	55.45	89,455	46,652	192	206,934	851	388,381	1,597
2016	59.84	132,321	109,224	304	402,076	1,117	562,287	1,563
2017	48.58	116,013	100,718	319	308,666	978	6,136,019	19,450
2018	64.42	152,861	154,954	373	499,901	1,203	2,174,217	5,230
<i>WY1996-2018 Average</i>	<i>51.61</i>	<i>117,318</i>	<i>109,034</i>	<i>342</i>	<i>368,882</i>	<i>1,156</i>	<i>1,534,440</i>	<i>4,810</i>
<i>WY1996-2005 Average</i>	<i>49.88</i>	<i>135,084</i>	<i>131,878</i>	<i>359</i>	<i>430,886</i>	<i>1,173</i>	<i>1,497,966</i>	<i>4,078</i>
<i>Current 10-yr Average</i>	<i>53.68</i>	<i>104,136</i>	<i>88,451</i>	<i>312</i>	<i>319,391</i>	<i>1,128</i>	<i>1,703,149</i>	<i>6,014</i>
<i>Difference</i>	<i>8%</i>	<i>-23%</i>	<i>-33%</i>	<i>-13%</i>	<i>-26%</i>	<i>-4%</i>	<i>14%</i>	<i>47%</i>
<i>WY2000-2005</i>	<i>49.70</i>	<i>176,370</i>	<i>184,095</i>	<i>384</i>	<i>569,262</i>	<i>1,187</i>	<i>2,092,392</i>	<i>4,363</i>

Note: Flows and loads prior to WY2001 based on adjacent basins.

Water Quality Assessment of the St. Lucie River Watershed – Water Year 2018 - DRAFT

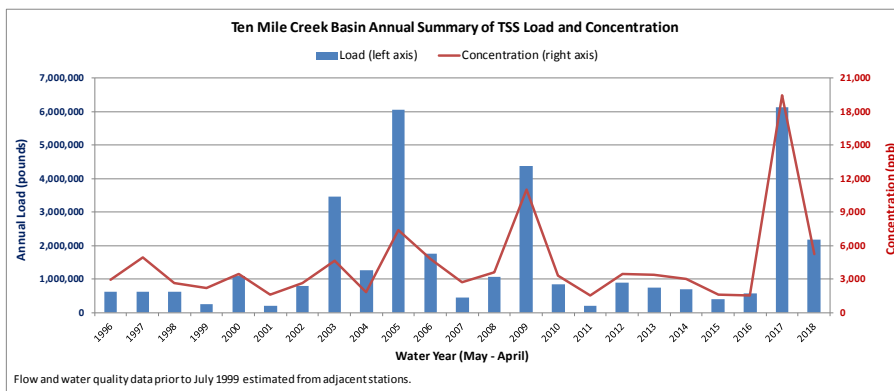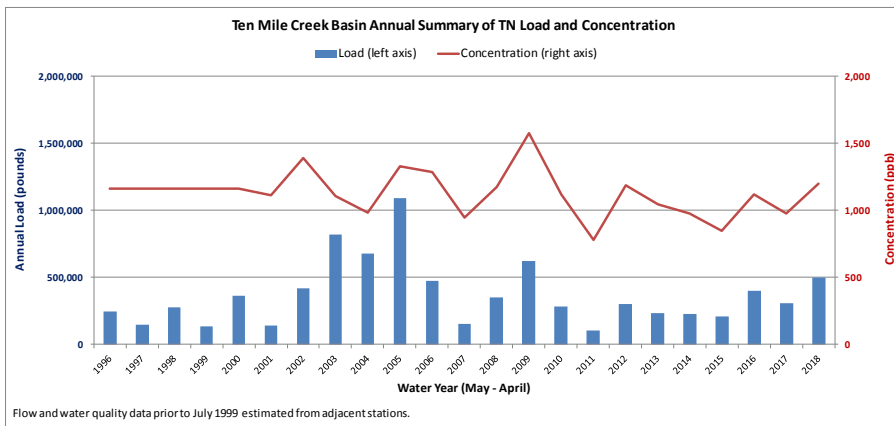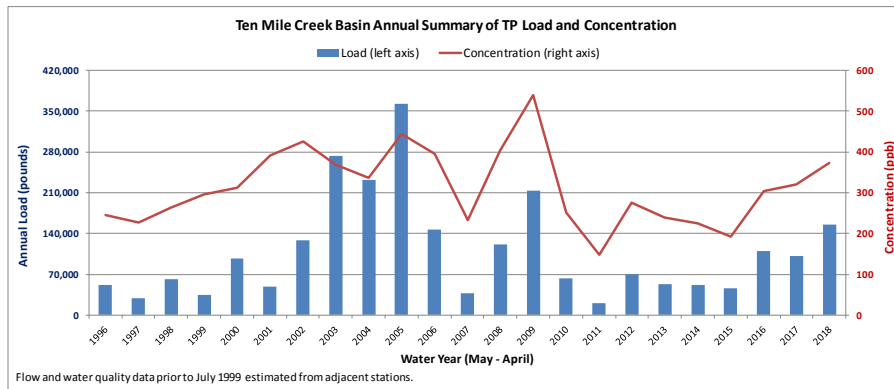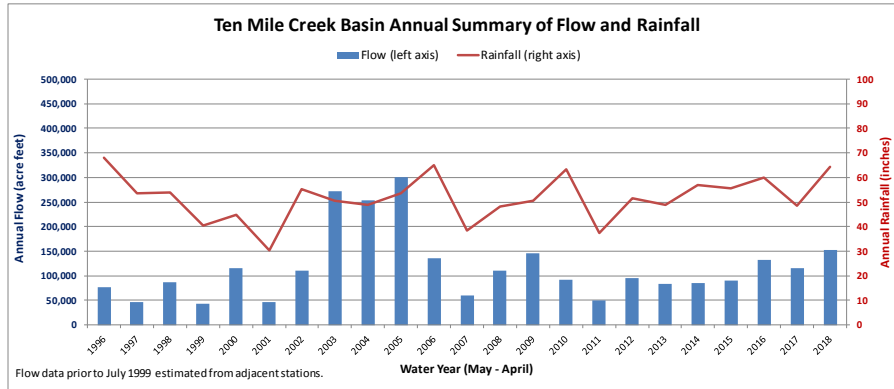





Water Quality Assessment of the St. Lucie River Watershed – Water Year 2018 - DRAFT

Annual Summary of Flows and Loads from the Tidal Basins

Water Year	Basin Rainfall inches	Basin Flow AF	TP Load pounds	FWM TP Conc µg/L	TN Load pounds	FWM TN Conc µg/L	TSS Load pounds	FWM TSS Conc µg/L
1980		155,185	49,912	118	384,499	911	2,205,338	5,226
1981		89,373	28,745	118	221,438	911	1,270,084	5,226
1982		91,439	29,409	118	226,555	911	1,299,434	5,226
1983		256,279	82,426	118	634,977	911	3,641,981	5,226
1984		149,556	48,101	118	370,550	911	2,125,332	5,226
1985		96,851	31,150	118	239,965	911	1,376,345	5,226
1986		121,871	39,197	118	301,957	911	1,731,908	5,226
1987		207,601	66,770	118	514,366	911	2,950,207	5,226
1988		110,097	35,410	118	272,784	911	1,564,584	5,226
1989		97,212	31,266	118	240,861	911	1,381,484	5,226
1990		57,218	18,403	118	141,767	911	813,119	5,226
1991	78.80	215,664	69,363	118	534,344	911	3,064,794	5,226
1992	60.32	165,536	53,241	118	410,145	911	2,352,433	5,226
1993	79.25	216,896	69,759	118	537,398	911	3,082,311	5,226
1994	60.44	165,854	53,343	118	410,932	911	2,356,945	5,226
1995	76.49	209,412	67,352	118	518,854	911	2,975,949	5,226
1996	77.41	204,909	65,904	118	507,698	911	2,911,961	5,226
1997	53.74	147,561	47,460	118	365,609	911	2,096,993	5,226
1998	56.01	192,323	61,856	118	476,513	911	2,733,097	5,226
1999	47.60	139,088	44,734	118	344,616	911	1,976,583	5,226
2000	55.39	167,383	53,835	118	414,722	911	2,378,683	5,226
2001	36.04	90,793	29,201	118	224,956	911	1,290,261	5,226
2002	65.82	171,093	55,028	118	423,913	911	2,431,401	5,226
2003	44.80	93,580	32,646	128	231,861	911	943,883	3,709
2004	45.54	122,723	37,766	113	275,232	825	1,744,016	5,226
2005	55.72	142,713	45,900	118	370,230	954	2,551,184	6,574
2006	66.47	203,662	73,350	132	565,613	1,021	4,322,199	7,804
2007	31.25	76,179	18,394	89	152,766	737	710,542	3,430
2008	63.69	169,686	41,463	90	399,256	865	2,107,771	4,568
2009	44.20	142,576	37,325	96	336,771	869	2,835,350	7,313
2010	58.22	159,555	44,773	103	356,200	821	2,565,076	5,912
2011	32.91	84,663	24,535	107	196,776	855	1,414,223	6,143
2012	47.08	142,871	37,753	97	332,753	856	1,654,459	4,258
2013	51.81	118,440	26,627	83	261,484	812	1,371,547	4,258
2014	55.06	148,505	41,862	104	386,977	958	1,719,707	4,258
2015	51.30	148,971	39,664	98	320,775	792	1,725,105	4,258
2016	60.68	166,501	45,234	100	411,104	908	1,928,095	4,258
2017	44.76	123,321	32,587	97	274,740	819	1,428,070	4,258
2018	50.08	137,763	42,337	113	341,316	911	1,595,310	4,258
WY2003-2018 Average	50.22	136,357	38,889	103	321,460	867	1,811,277	4,885
WY2003-2005 Average	48.68	119,672	38,490	118	296,509	911	1,700,660	5,226
Current 10-yr Average	49.61	137,317	37,270	100	321,890	862	1,823,694	4,884
Difference	2%	15%	-3%	-16%	9%	-5%	7%	-7%

Note: For the Tidal Basins, reliable flow data are not available, so flows were estimated based on SFWMD models (see text for additional details). Concentrations observed in WY2003-2005 were applied prior to that time.

Water Quality Assessment of the St. Lucie River Watershed – Water Year 2018 - DRAFT

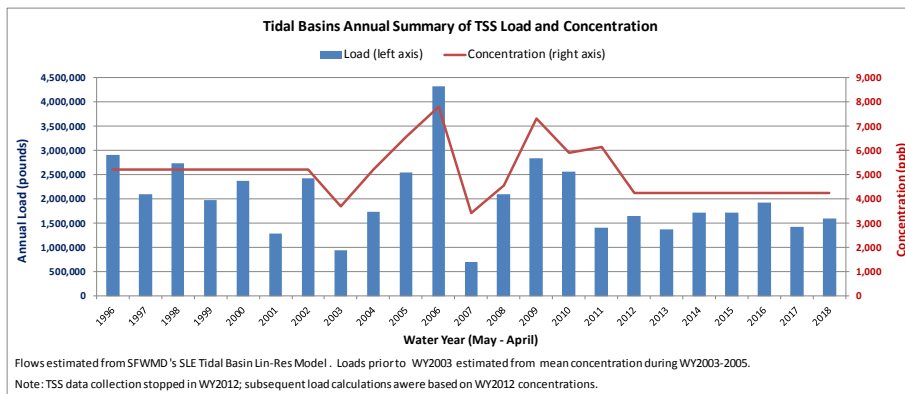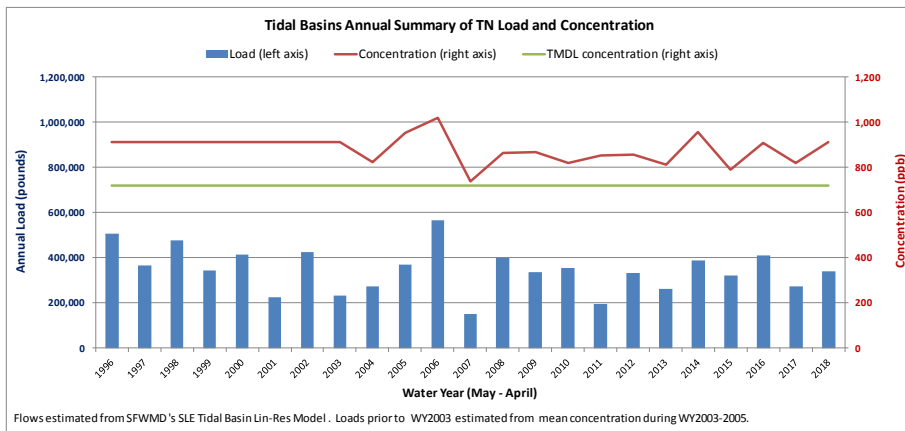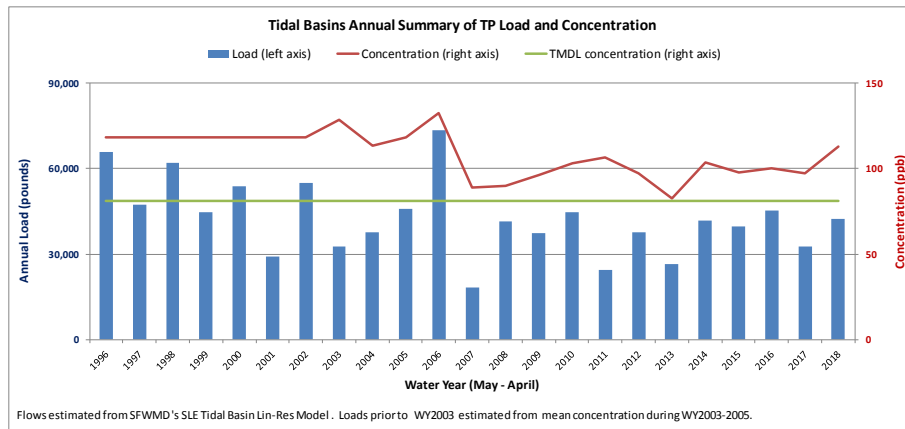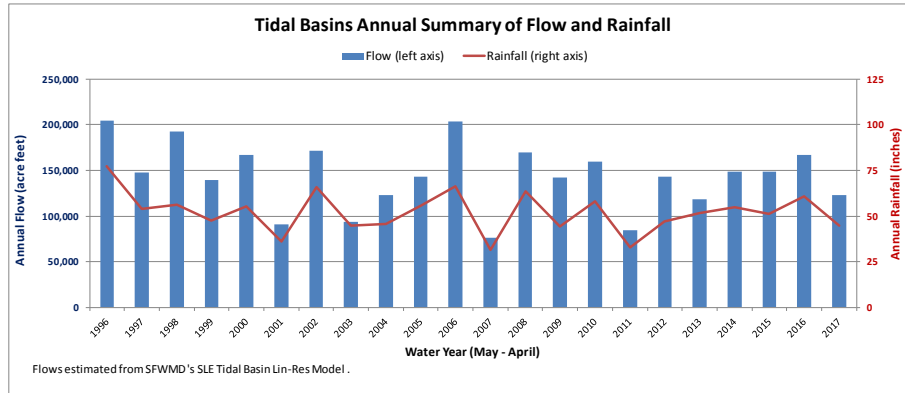





Water Quality Assessment of the St. Lucie River Watershed – Water Year 2018 - DRAFT

Annual Summary of Flows and Loads from the SLRE Watershed

Water Year	SLRE Rainfall inches	Total Flow AF	TP Load pounds	FWM TP Conc µg/L	TN Load pounds	FWM TN Conc µg/L	TSS Load pounds	FWM TSS Conc µg/L
1996	77.41	1,859,394	1,008,377	199	7,881,514	1,559	49,754,531	9,840
1997	53.74	540,163	234,505	160	1,949,104	1,327	9,388,272	6,391
1998	56.01	1,812,819	1,002,245	203	8,595,988	1,744	105,351,422	21,371
1999	47.60	564,466	361,039	235	2,084,921	1,358	6,053,866	3,944
2000	55.39	1,058,923	819,562	285	4,279,325	1,486	25,454,951	8,840
2001	36.04	330,297	197,642	220	1,206,340	1,343	11,776,297	13,111
2002	65.82	668,024	593,097	326	2,506,281	1,380	12,220,165	6,727
2003	44.80	972,173	731,190	277	3,401,408	1,287	17,314,576	6,549
2004	45.54	1,382,610	932,944	248	4,798,335	1,276	37,648,279	10,013
2005	55.72	1,661,906	1,752,507	388	7,998,479	1,770	131,754,142	29,153
2006	66.47	2,101,536	1,631,022	285	9,976,231	1,746	149,090,225	26,088
2007	31.25	255,094	168,742	243	851,307	1,227	6,288,411	9,065
2008	63.69	495,542	423,390	314	1,709,651	1,269	17,208,815	12,770
2009	44.20	713,631	763,092	393	2,963,550	1,527	30,756,760	15,849
2010	58.22	664,562	431,821	239	2,296,660	1,271	13,717,123	7,590
2011	32.91	529,093	252,658	176	1,802,457	1,253	9,206,182	6,399
2012	47.08	447,950	292,759	240	1,669,621	1,371	9,929,369	8,151
2013	51.81	587,599	418,734	262	2,115,255	1,324	11,713,540	7,331
2014	55.06	1,219,058	815,106	246	4,581,557	1,382	26,673,538	8,046
2015	51.30	636,516	410,372	237	2,010,579	1,162	6,773,845	3,913
2016	60.68	1,113,694	779,389	257	4,299,374	1,420	42,126,069	13,910
2017	44.76	840,260	474,995	208	2,880,711	1,261	32,456,710	14,204
2018	50.08	1,392,652	1,217,559	321	6,483,994	1,712	160,697,552	42,432
<i>WY1996-2018 Average</i>	<i>51.98</i>	<i>949,911</i>	<i>683,163</i>	<i>264</i>	<i>3,840,984</i>	<i>1,487</i>	<i>40,145,854</i>	<i>15,541</i>
<i>WY1996-2005 Average</i>	<i>53.81</i>	<i>1,085,078</i>	<i>763,311</i>	<i>259</i>	<i>4,470,169</i>	<i>1,515</i>	<i>40,671,650</i>	<i>13,784</i>
<i>Current 10-yr Average</i>	<i>49.61</i>	<i>814,501</i>	<i>585,649</i>	<i>264</i>	<i>3,110,376</i>	<i>1,404</i>	<i>34,405,069</i>	<i>15,533</i>
Difference	-8%	-25%	-23%	2%	-30%	-7%	-15%	13%



Notes: 1. "FWM" = Flow-weighted mean

Water Quality Assessment of the St. Lucie River Watershed – Water Year 2018 - DRAFT

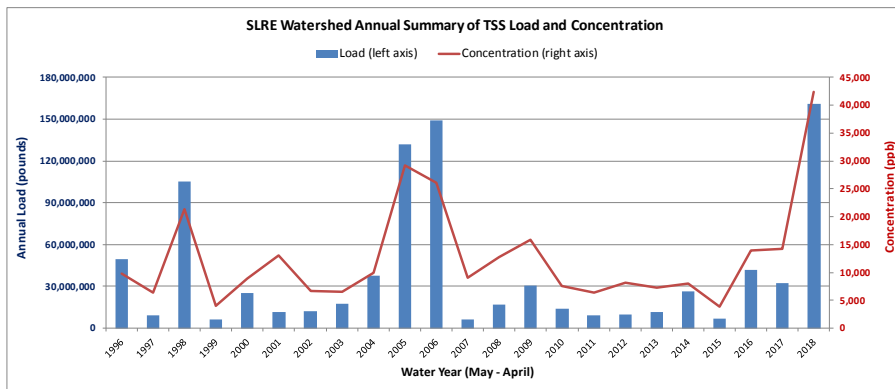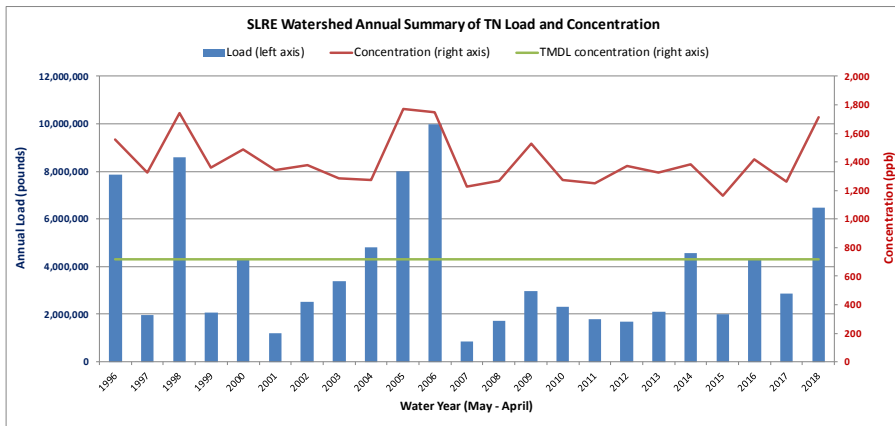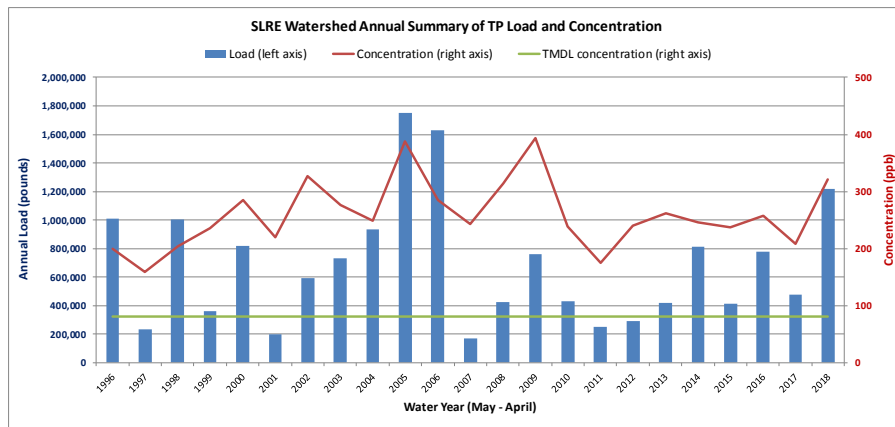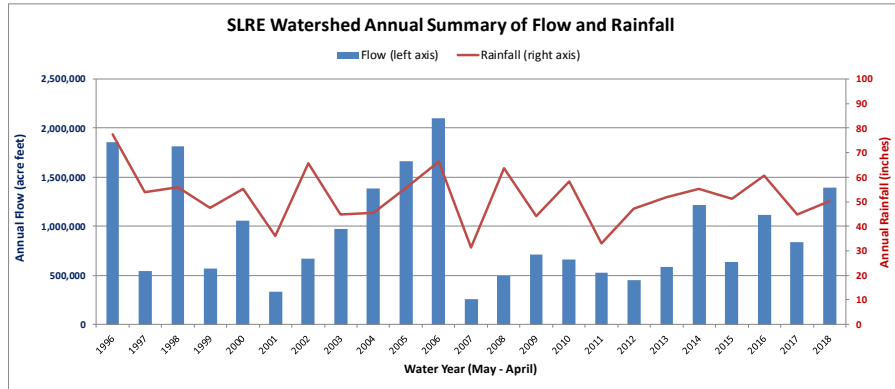


APPENDIX 2. Nutrient Trends

Figure 2-1. C-23 Canal Basin Nutrient Load Trends.

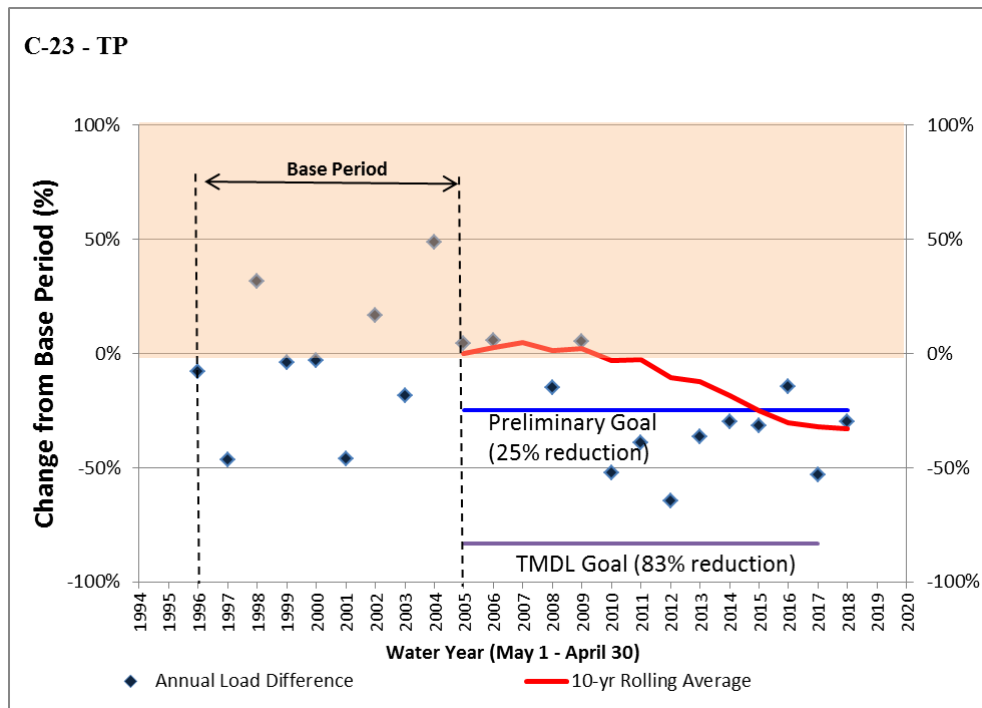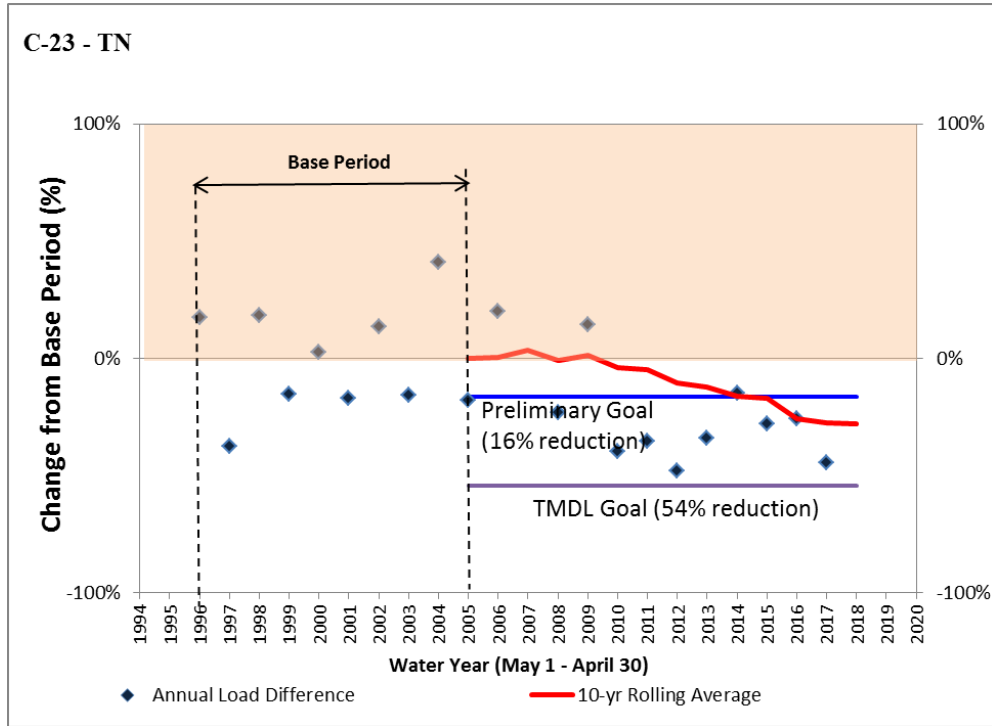


Notes: A negative change in loads denotes a reduction in load in comparison to the base period, adjusted for hydrologic variability. A downward trend in the solid line also denotes a reduction in loads.

Figure 2-2. C-24 Basin Nutrient Load Trends.

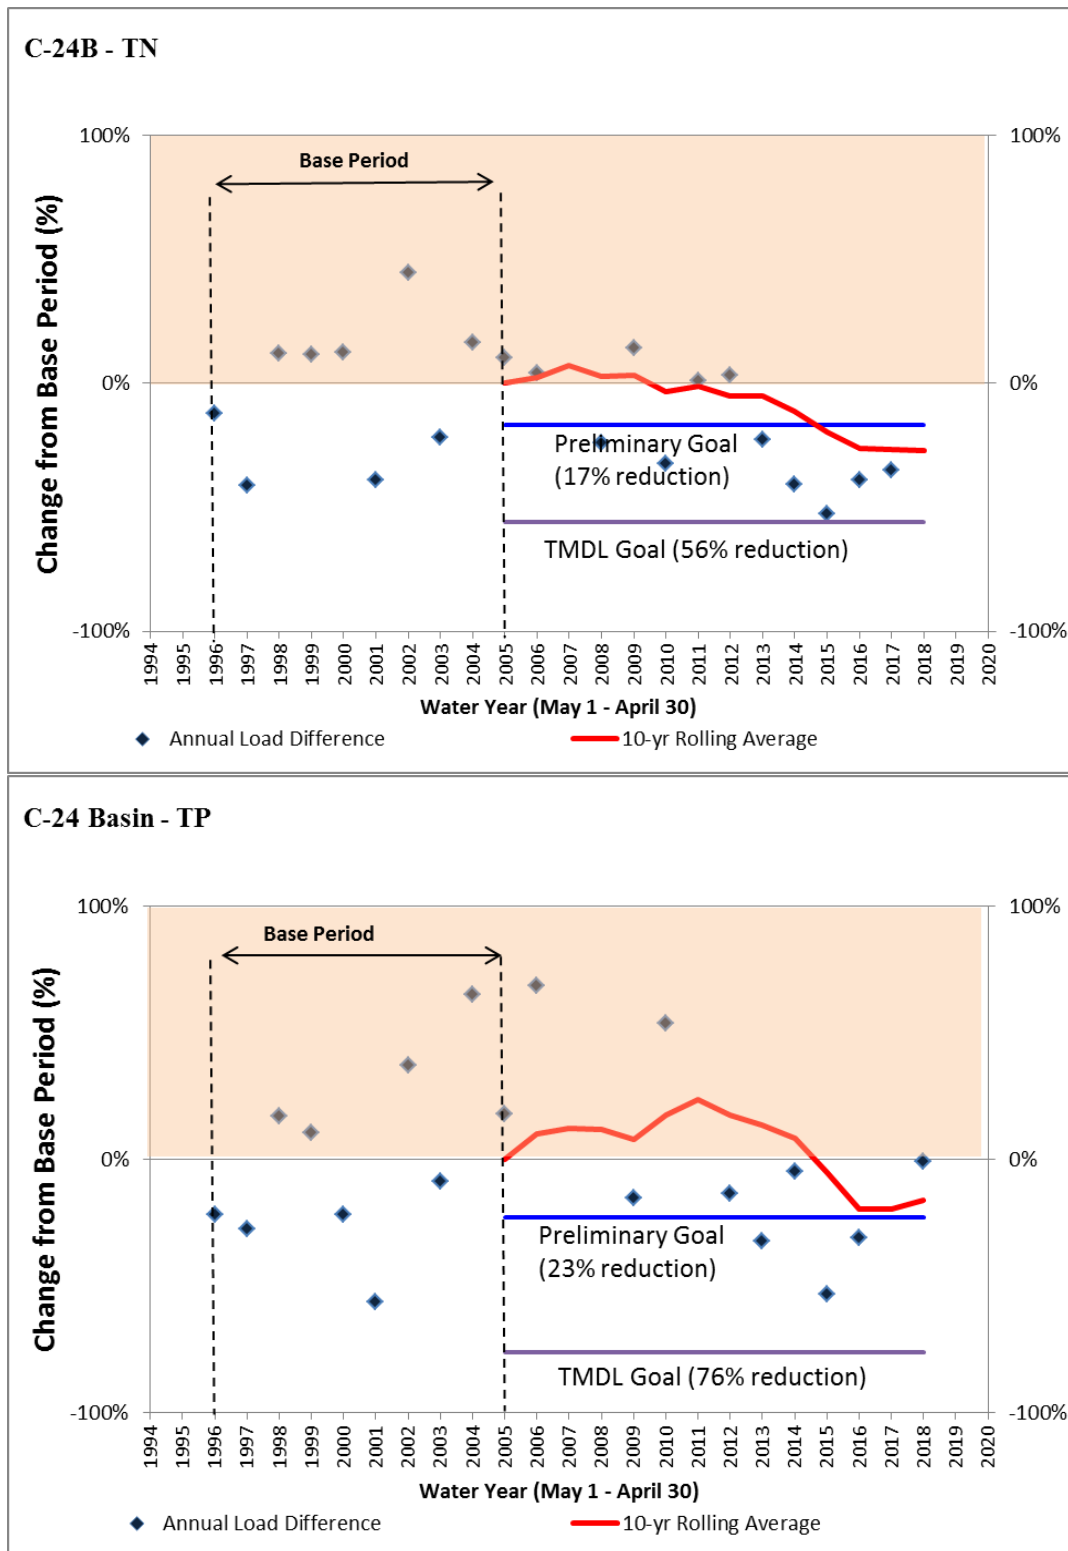


Notes: A negative change in loads denotes a reduction in load in comparison to the base period, adjusted for hydrologic variability. A downward trend in the solid line also denotes a reduction in loads.

Figure 2-3. C-44 Basin Nutrient Load Trends.

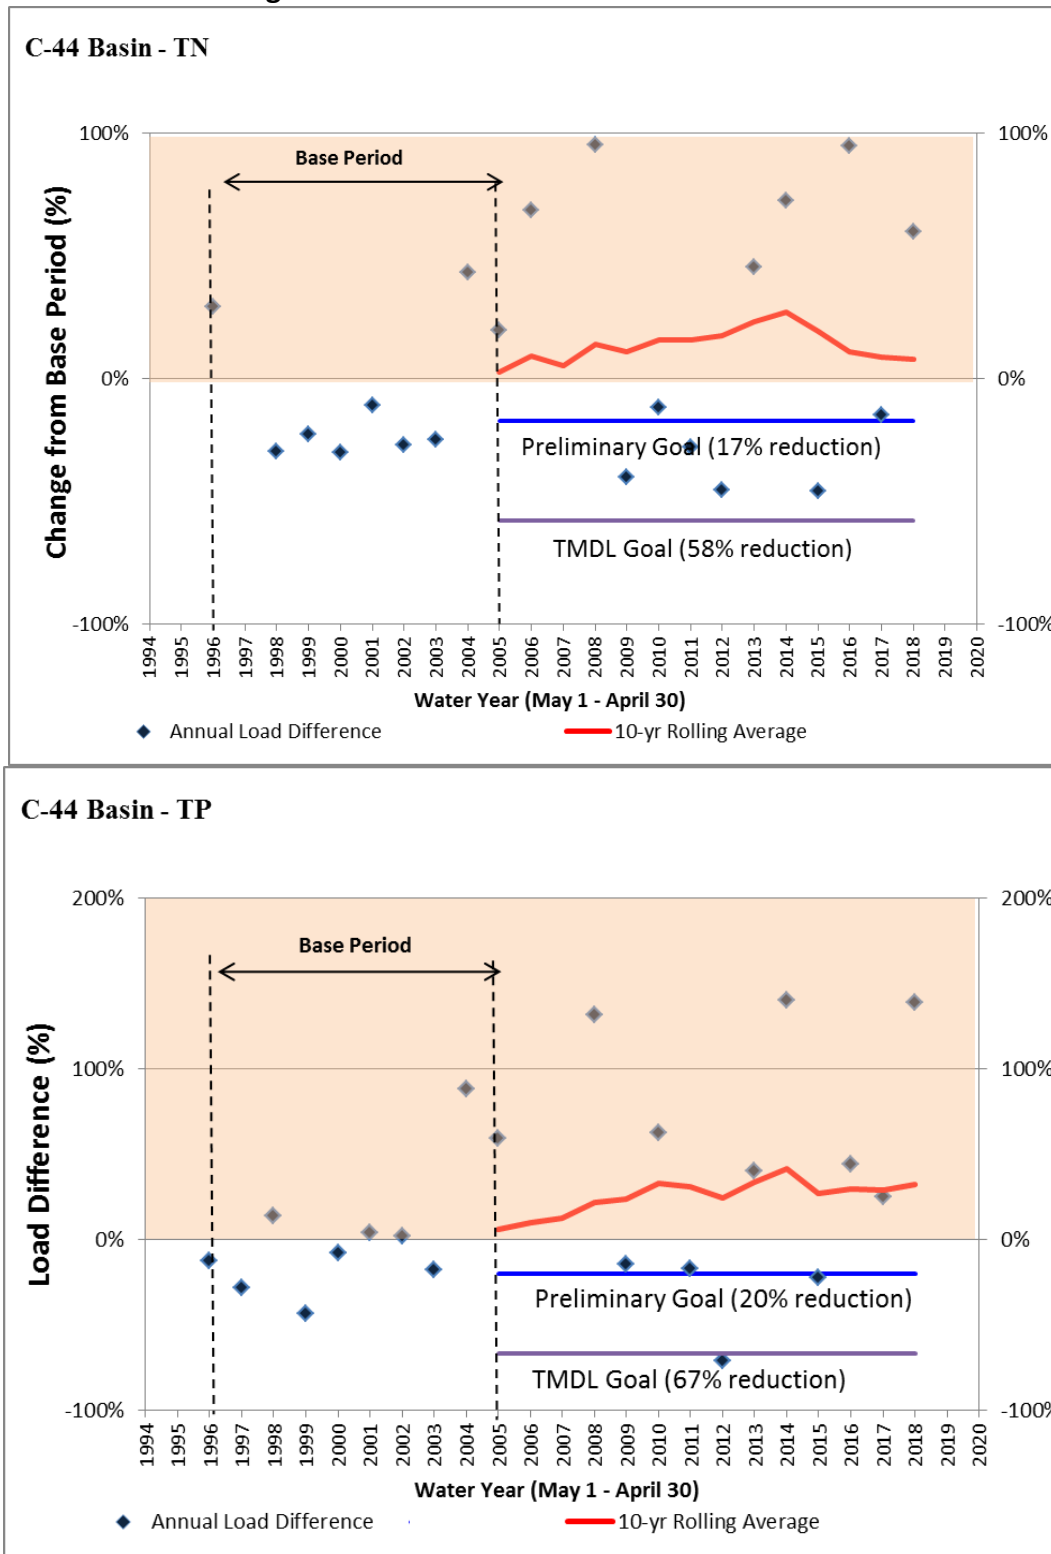


Notes: A negative change in loads denotes a reduction in load in comparison to the base period, adjusted for hydrologic variability. A downward trend in the solid line also denotes a reduction in loads.

Figure 2-4. Ten Mile Creek Basin Nutrient Load Trends.

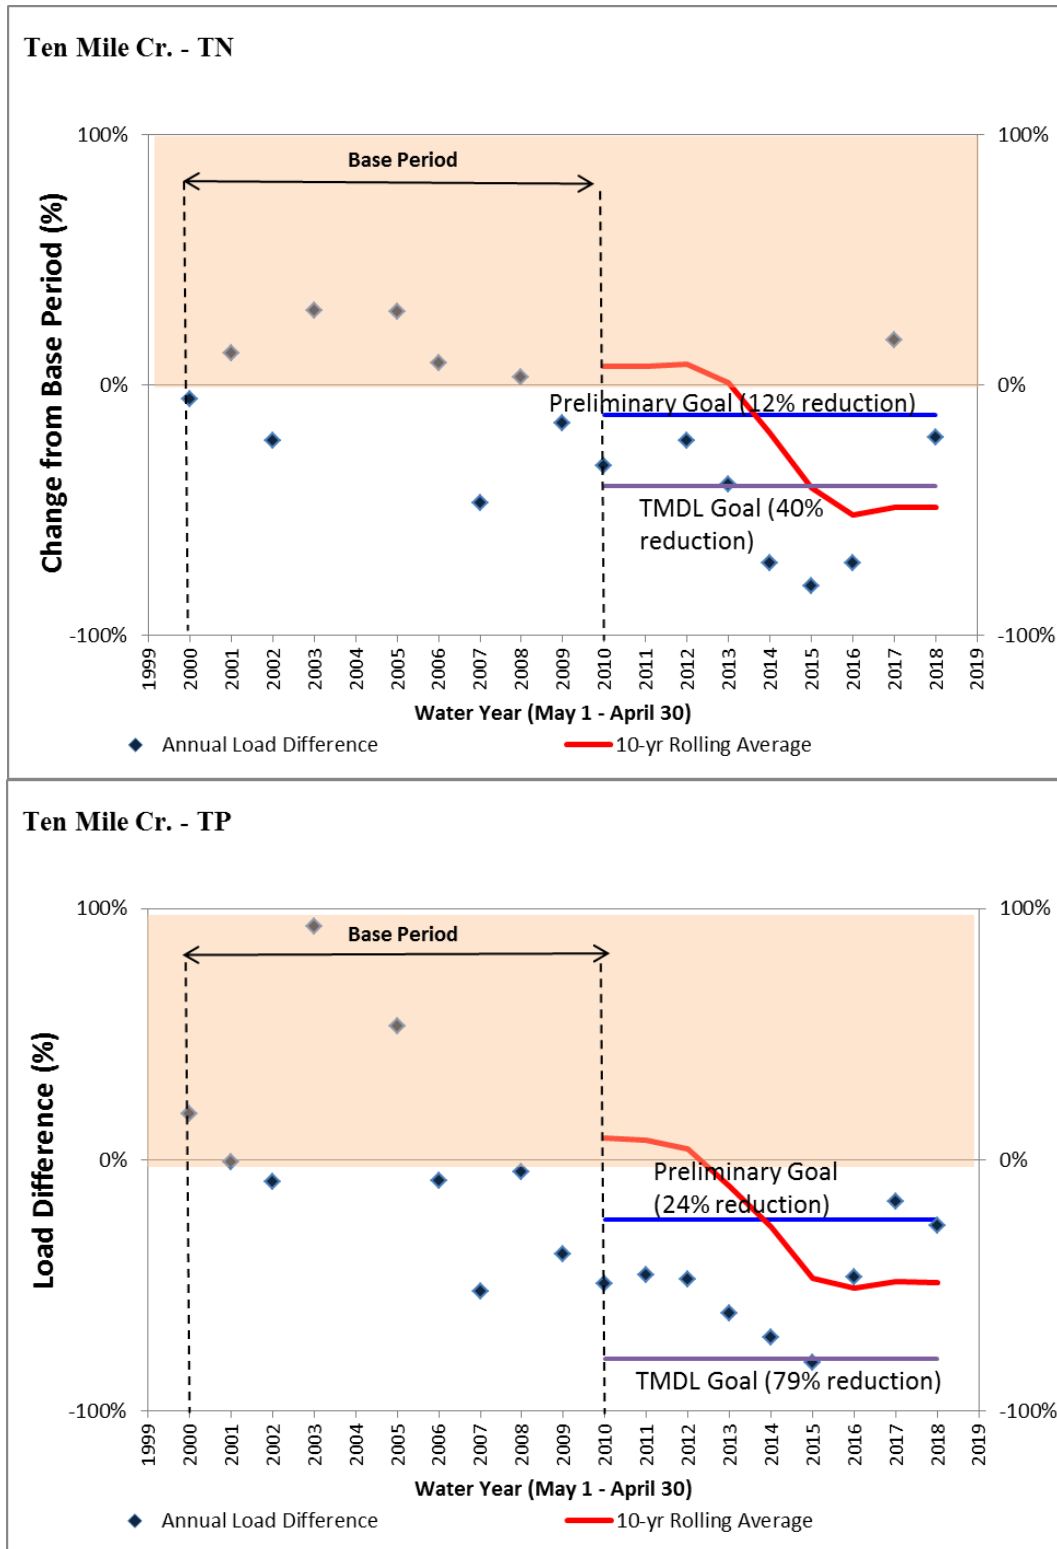

Notes: A negative change in loads denotes a reduction in load in comparison to the base period, adjusted for hydrologic variability. A downward trend in the solid line also denotes a reduction in loads.


Figure 2-5. Comparison of observed annual concentrations to TMDL and BMAP Goals: Lake Okeechobee Discharges.

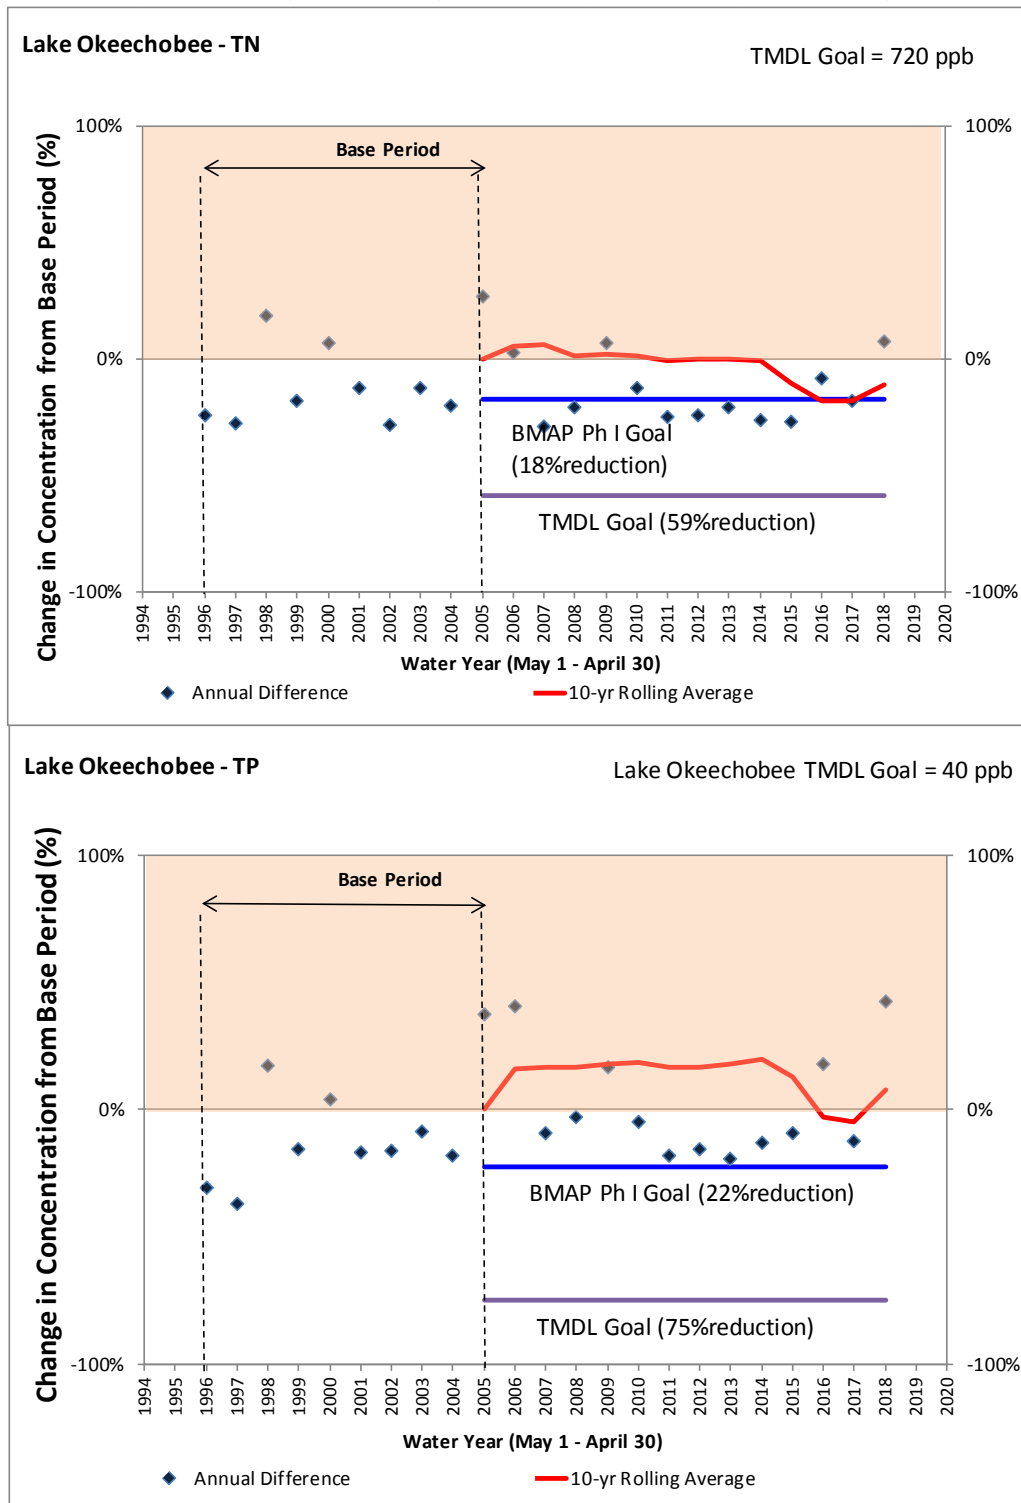

Notes: A negative change denotes a reduction in concentration in comparison to the base period.
A downward trend in the solid line denotes a reduction in concentration.

Water Quality Assessment of the St. Lucie River Watershed – Water Year 2018 - DRAFT

Figure 2-6. Comparison of observed annual concentrations to TMDL and BMAP Goals: Tidal Basins.

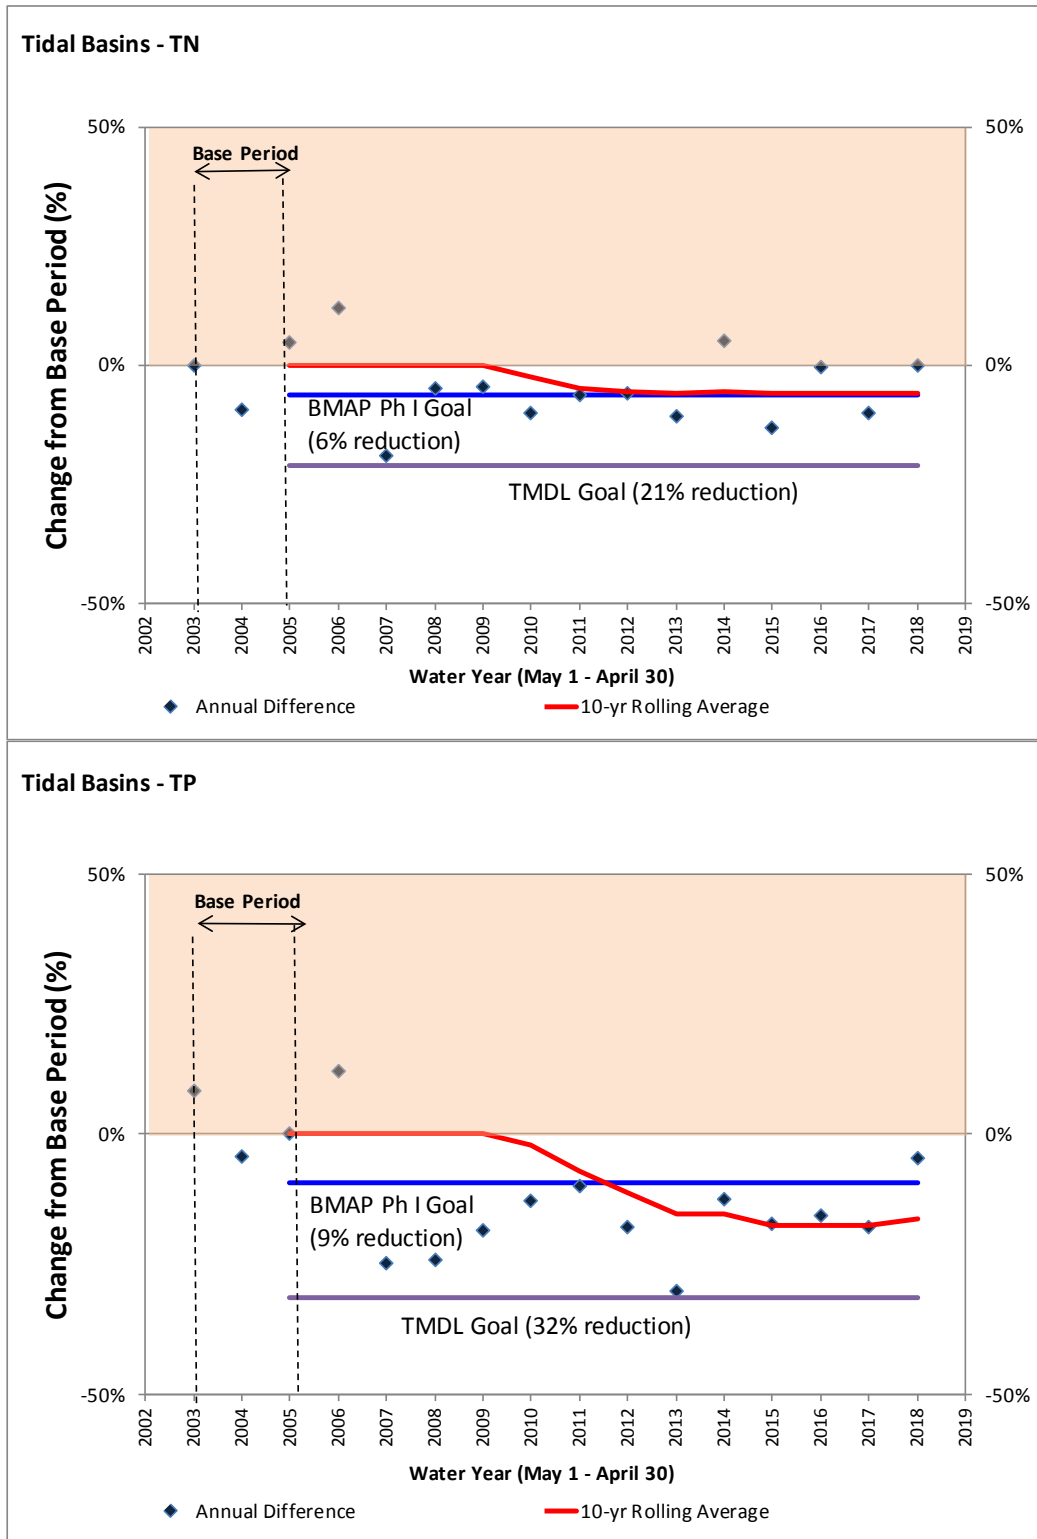

Notes: A negative change denotes a reduction in concentration in comparison to the base period. A downward trend in the solid line denotes a reduction in concentration.





Water Quality Assessment of the St. Lucie River Watershed – Water Year 2018 - DRAFT





Appendix 3. Flows and Loads to the St. Lucie River and Estuary

C-44 Canal Basin to SLRE

Water Year	Basin Rainfall inches	Basin Flow AF	TP Load pounds	FWM TP Conc µg/L	TN Load pounds	FWM TN Conc µg/L	TSS Load pounds	FWM TSS Conc µg/L
1980	58.25	88,221	110,390	460	308,027	1,284	1,084,507	4,521
1981	37.19	22,544	12,765	208	93,147	1,519	7,462	122
1982	51.02	6,840	2,300	124	31,367	1,686	68,167	3,665
1983	69.84	200,608	89,819	165	1,439,689	2,639	54,544,213	99,984
1984	58.74	216,422	71,877	122	906,326	1,540	3,825,464	6,500
1985	47.69	133,325	90,542	250	642,138	1,771	204,223	563
1986	46.42	8,160	2,088	94	29,354	1,323	36,958	1,666
1987	50.94	87,327	34,746	146	356,427	1,501	139,607	588
1988	45.94	139,353	52,868	140	540,107	1,425	840,369	2,218
1989	41.42	212,179	97,698	169	831,209	1,441	81,625	141
1990	45.18	40,392	22,126	201	122,023	1,111	79,862	727
1991	53.84	14,384	4,813	123	36,939	944	27,925	714
1992	41.47	156,565	64,954	153	264,779	622	544,834	1,280
1993	67.53	351,243	165,497	173	1,067,243	1,117	1,248,656	1,307
1994	56.85	18,263	5,381	108	47,491	956	26,745	539
1995	66.40	342,851	149,923	161	1,140,226	1,223	1,277,421	1,370
1996	69.99	307,565	173,363	207	2,283,833	2,731	938,733	1,122
1997	47.11	97,077	33,732	128	482,734	1,829	90,431	343
1998	56.93	146,824	51,375	129	349,943	876	441,924	1,107
1999	46.22	122,359	53,883	162	454,730	1,367	93,497	281
2000	60.74	176,437	116,344	242	602,790	1,256	127,842	266
2001	34.60	9,010	3,925	160	31,752	1,296	35,590	1,453
2002	57.14	32,802	16,343	183	108,481	1,216	22,222	249
2003	51.51	114,820	63,495	203	293,728	941	35,854	115
2004	45.70	213,456	176,683	304	746,505	1,286	849,225	1,463
2005	55.91	176,836	226,606	471	1,075,737	2,237	1,511,334	3,143
2006	65.64	367,369	266,947	267	2,510,611	2,513	6,864,511	6,871
2007	30.61	28,842	12,732	162	93,079	1,187	46,741	596
2008	53.60	1,991	1,214	224	7,182	1,327	6,538	1,208
2009	42.95	65,241	100,087	564	312,289	1,760	458,160	2,582
2010	55.70	92,428	61,142	243	319,323	1,270	216,226	860
2011	32.28	51,780	42,713	303	174,881	1,242	83,929	596
2012	40.94	3,652	1,181	119	9,976	1,004	8,653	871
2013	48.06	85,649	77,902	334	357,654	1,536	88,024	378
2014	54.19	256,335	233,596	335	1,154,698	1,657	338,557	486
2015	43.18	107,985	80,421	274	362,023	1,233	39,362	134
2016	46.19	177,656	130,551	270	685,090	1,418	415,041	859
2017	40.00	78,823	64,531	301	318,269	1,485	303,702	1,417
2018	47.45	79,843	146,320	674	560,435	2,581	6,818,189	31,403
WY1980-2018 Average	50.39	123,935	79,817	237	542,365	1,609	2,150,572	6,381
WY1996-2005 Average	52.58	139,719	91,575	241	643,023	1,692	414,665	1,091
Current 10-yr Average	45.09	99,939	93,845	345	425,464	1,566	876,984	3,227
Difference	-14%	-28%	2%	43%	-34%	-7%	111%	196%


Water Quality Assessment of the St. Lucie River Watershed – Water Year 2018 - DRAFT

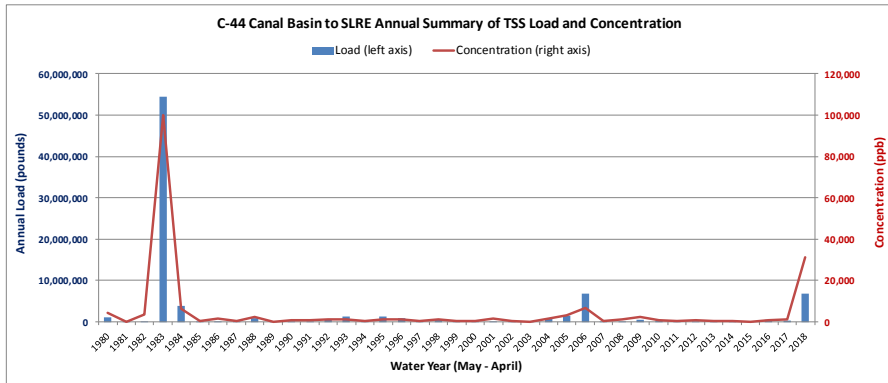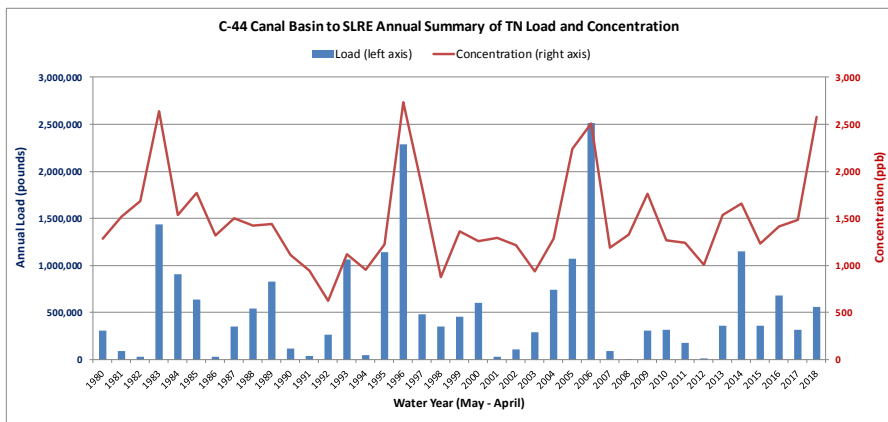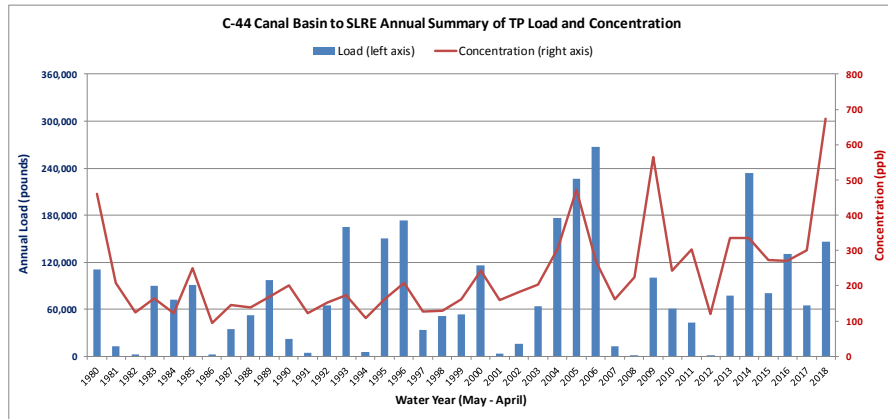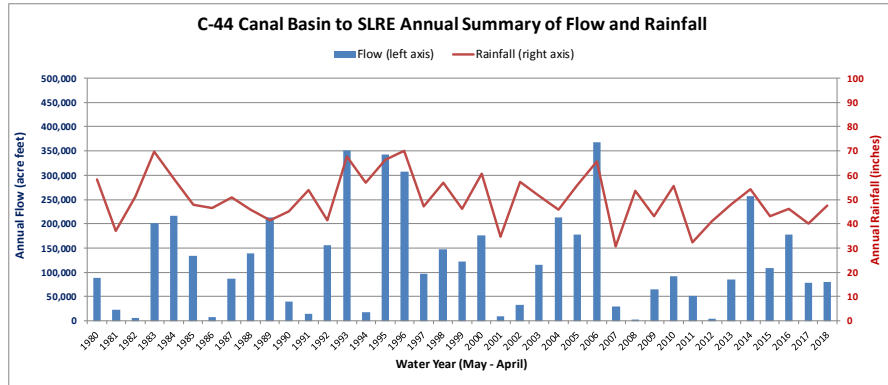

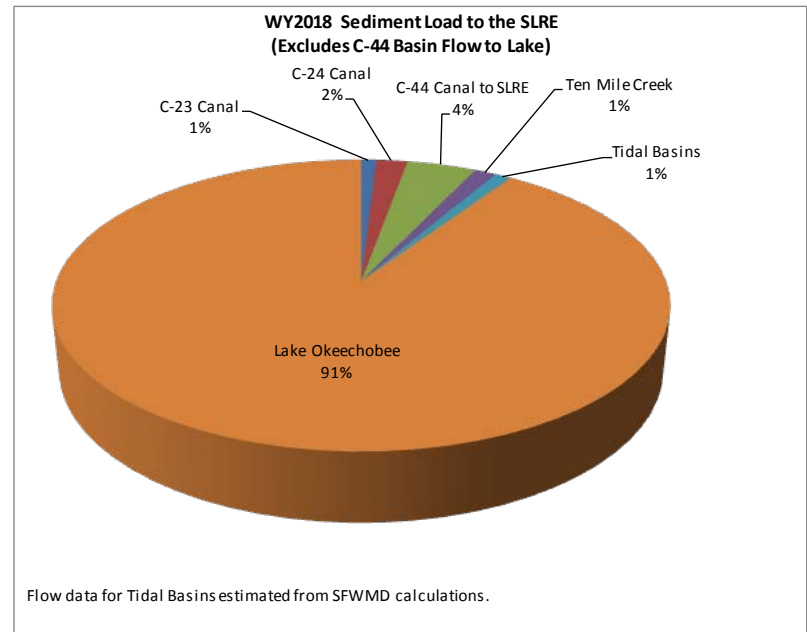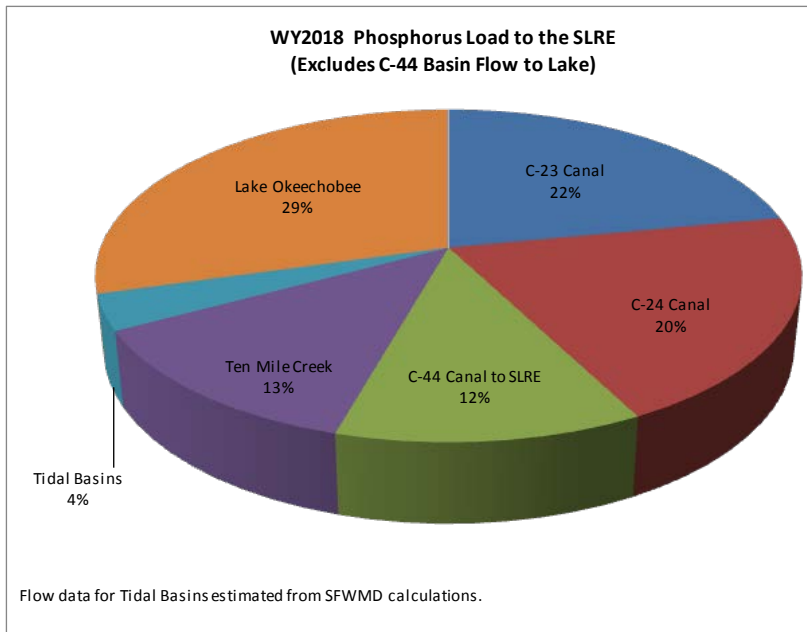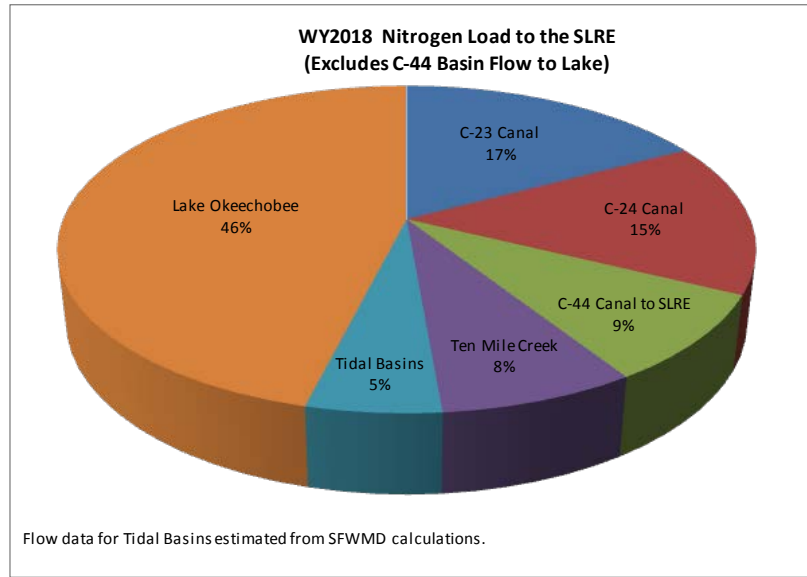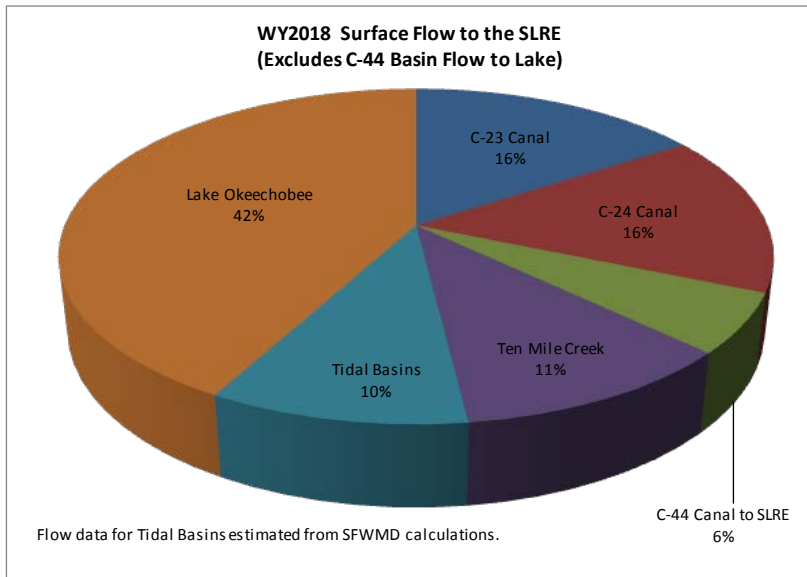


Water Quality Assessment of the St. Lucie River Watershed – Water Year 2018 - DRAFT


WY2018 Surface Flow to the SLRE

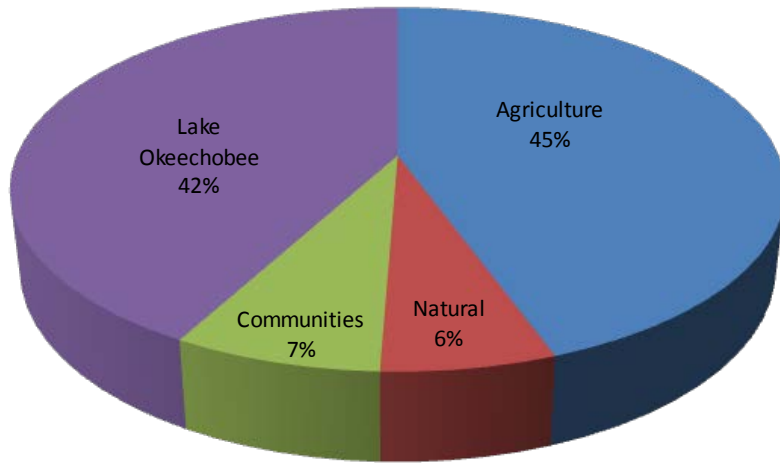


WY2018 Nitrogen Loading to the SLRE

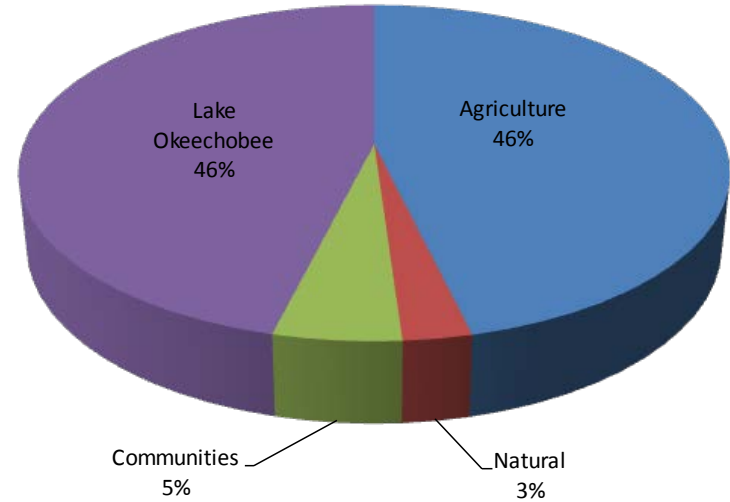

WY2018 Phosphorus Loading to the SLRE

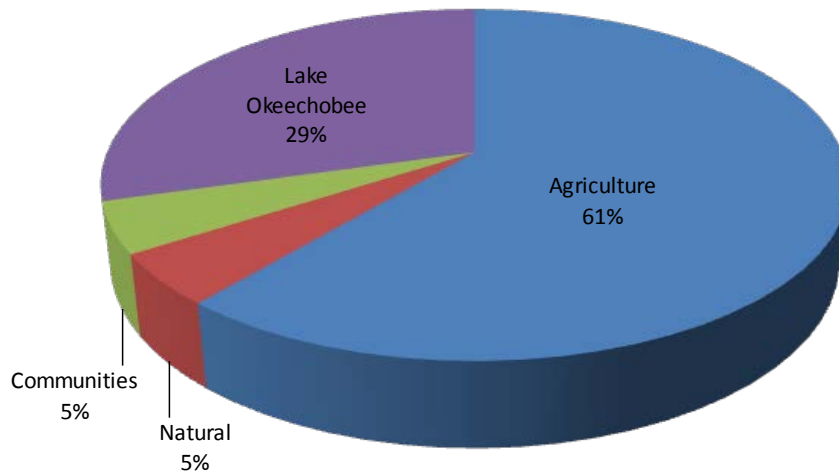


WY2018 Sediment Loading to the SLRE

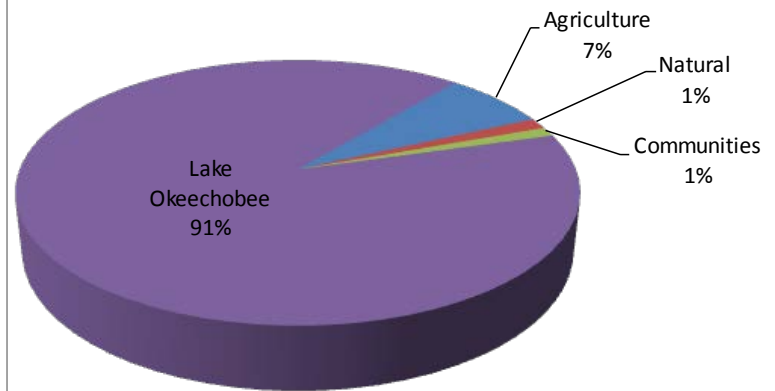


Water Quality Assessment of the St. Lucie River Watershed – Water Year 2018 - DRAFT

WY2009-2018 Average Annual Surface Flow to the SLRE

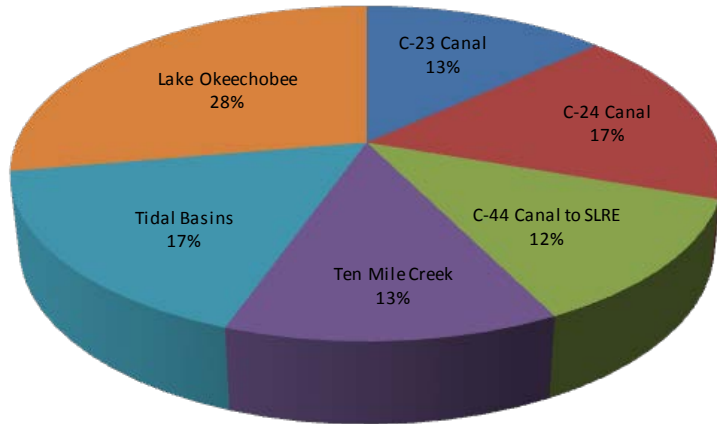


Flow data for Tidal Basins estimated from SFWMD calculations.

WY2009-2018 Average Annual Nitrogen Loads to the SLRE

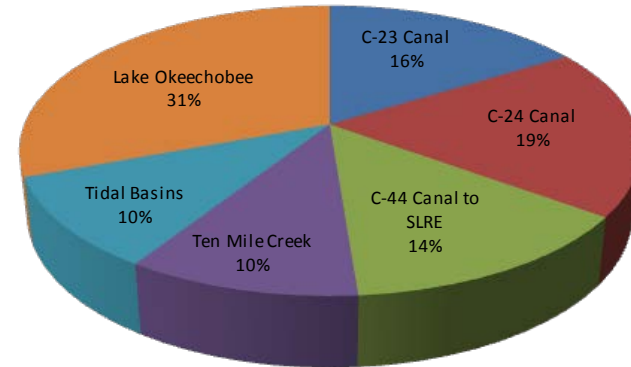


Flow data for Tidal Basins estimated from SFWMD calculations.

WY2009-2018 Average Annual Phosphorus Loads to the SLRE

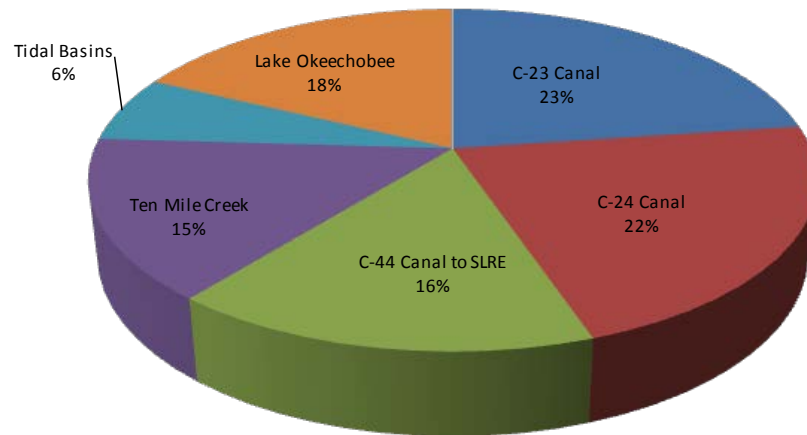

Flow data for Tidal Basins estimated from SFWMD calculations.


WY2009-2018 Average Annual Total Suspended Solids Loads to the SLRE

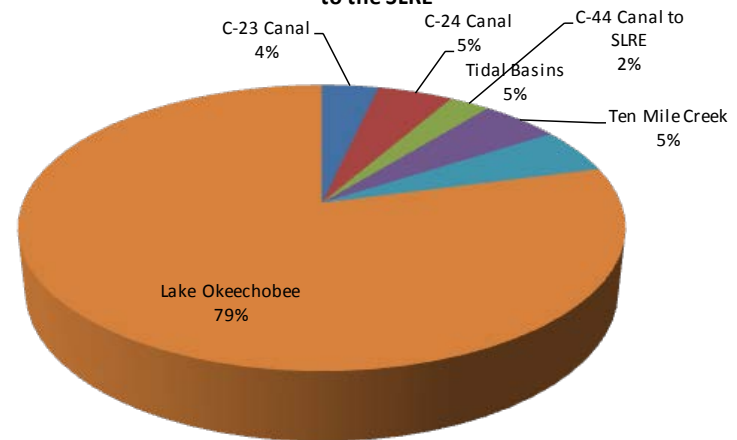


Flow data for Tidal Basins estimated from SFWMD calculations.

Water Quality Assessment of the St. Lucie River Watershed – Water Year 2018 - DRAFT


WY2009-2018 Average Annual Surface Flow to the SLRE

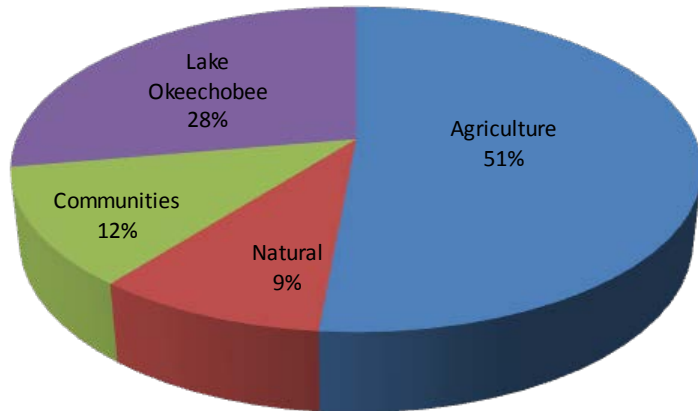

WY2009-2018 Average Annual Nitrogen Loads to the SLRE

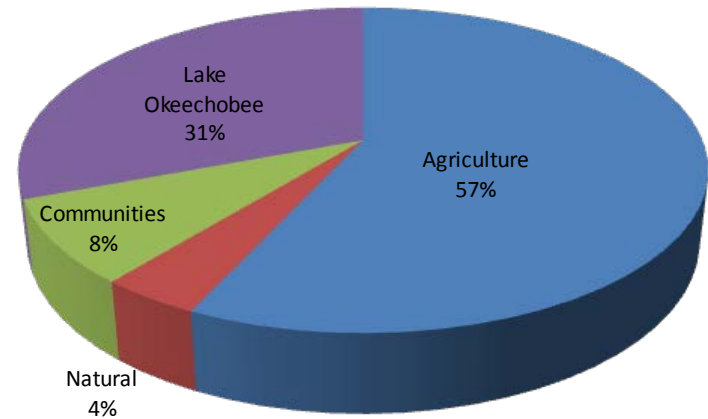

WY2009-2018 Average Annual Phosphorus Loads to the SLRE

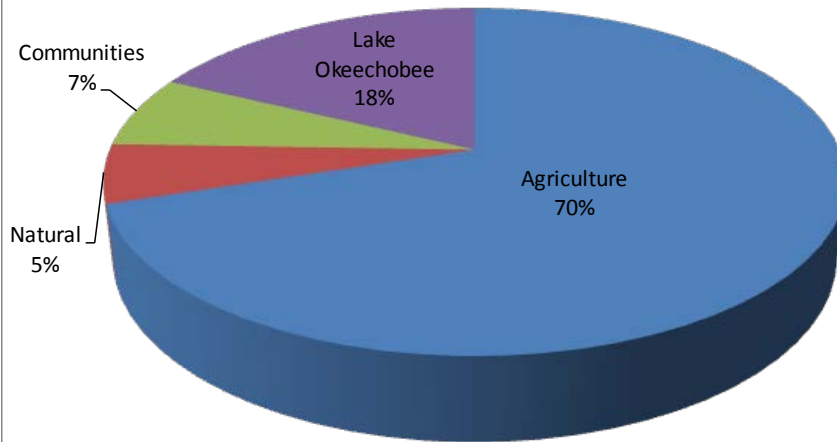

WY2009-2018 Average Annual Total Suspended Solids Loads to the SLRE

